

## **BCS Idun**

**Oleophobic impregnation**


### **Range of application:**

Water-based impregnation for roofs, granite slabs, driveways, porous facade surfaces and concrete floors. BCS Idun protects against water penetration and is resistant to oil, grease and urine, prevents algae, moss and frost damage and is UV-resistant, while also reducing the frequency with which the surface needs to be cleaned.

### **How to use:**

Clean the surface with BCS Amor and allow the surface to dry; the surface should not be wet when the impregnation agent is applied. Cover surfaces that are not to be treated. Shake the BCS Idun well before application, then apply with a low-pressure sprayer or roller, working from the top down. Full effect is not achieved until about a week after application, when the product has fully hardened.

The temperature of the surface should be at least +5°C.

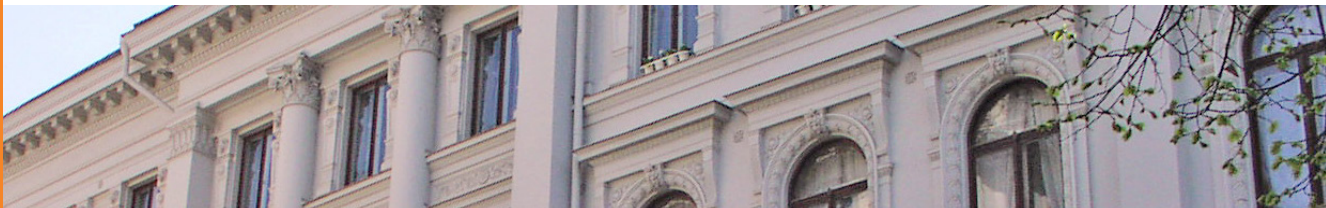

**Containers:** 10 or 25 litre, can

**Storage:** Frost-free in original packing

**Dosage:** Concentrate

**pH value:** 5,9

**Consumption:** Very absorbent surface: 1-3 m<sup>2</sup>/liter. Less absorbent surface: 4-10 m<sup>2</sup>/liter.

**ADR:** Not classified as dangerous goods for use by road or rail transportation

### **Precautions:**

Wear approved chemical safety goggles where eye exposure is reasonably probable. Protective gloves must be used if there is a risk of direct contact or splash. Butyl rubber. Nitrile. Reference to relevant standard: EN 374/III. In case of inadequate ventilation or risk of inhalation of dust, use suitable respiratory equipment with particle filter (type P2).

Eye wash facilities and emergency shower must be available when handling this product.

For more information please see the Safety Data Sheet for this particular product.

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result.  
If in doubt, contact MPE International for advice.