

→ 120.00 mm →

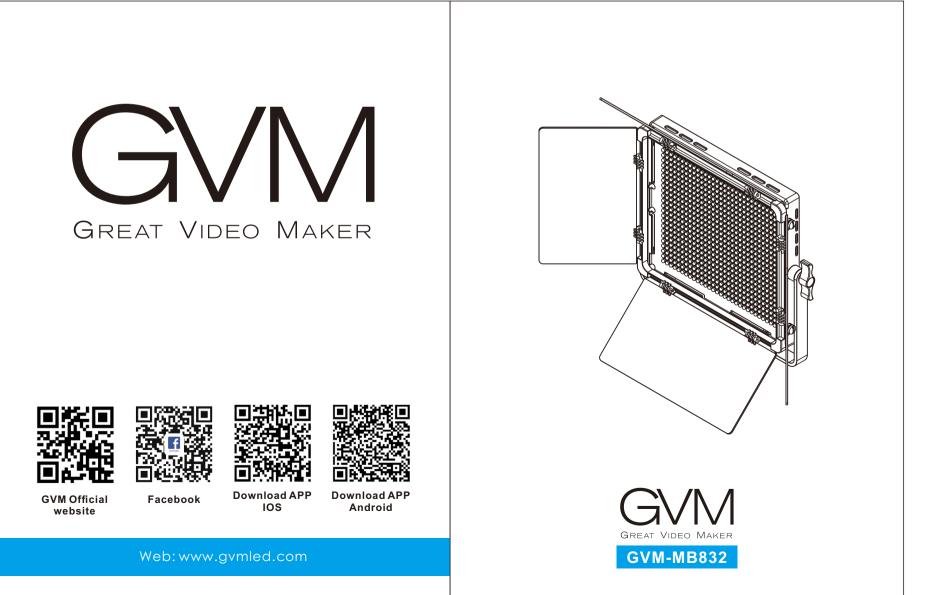

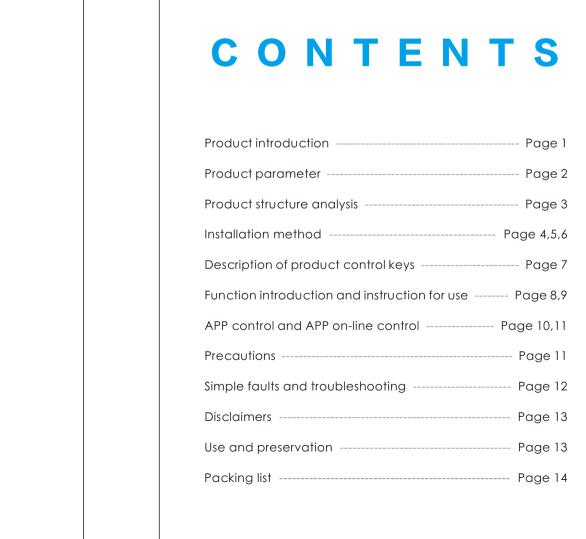

Welcome to use "GVM-MB832", this product is specially designed for the senior photography enthusiasts. Product usage scenarios are available for live broadcast / outdoor / studio photography, etc., and can also be used for YouTube video capture. The main features of the product are: ① Dual color temperature feature with stepless adjustment, color range 3200K~5600K, with 832 lamp bead, color rendering index 97+, helping to restore and enrich the color of the object, and providing you with natural ② APP intelligent control system, which can be controlled by your smart mol 3 With digital screen display and stable system, support 360 rotation

read the instructions below carefully.

Brand: GVM Product Name : Tempered panel light Product model: GVM-MB832 Product Size (mm): 326x320x73 Cooling: Natural heat dissipation Product material : Aluminum alloy + PC • Features / Features : APP, Joint control, High display, Standard folding four-leaf baffle, can effectively control the light, avoid unnecessary ligh ◆ Color rendering index : ≥97 custom control fill light, let you more easily and easily shoot the desired Color temperature: 3200K~5600K We believe that once using our product correctly, you can make huge progres Brightness: 25000lux/0.5m, 7800lux/1m when shooting. Before using the product, you are strongly recommended to

Power: 50W

Voltage : AC:100-240V

Power supply: DC15V/2A


Power supply mode : DC input & battery

Folding Battery tank Light adjustment method : Stepless adjustment Battery Capacity: 7.4V-4400mAh*2 (to be purchased separate

Light frame interface


1 The lamp can be installed and fixed on the bracket by rotating the known Indicator light

clockwise, and unloaded by rotating in the counterclockwise directio

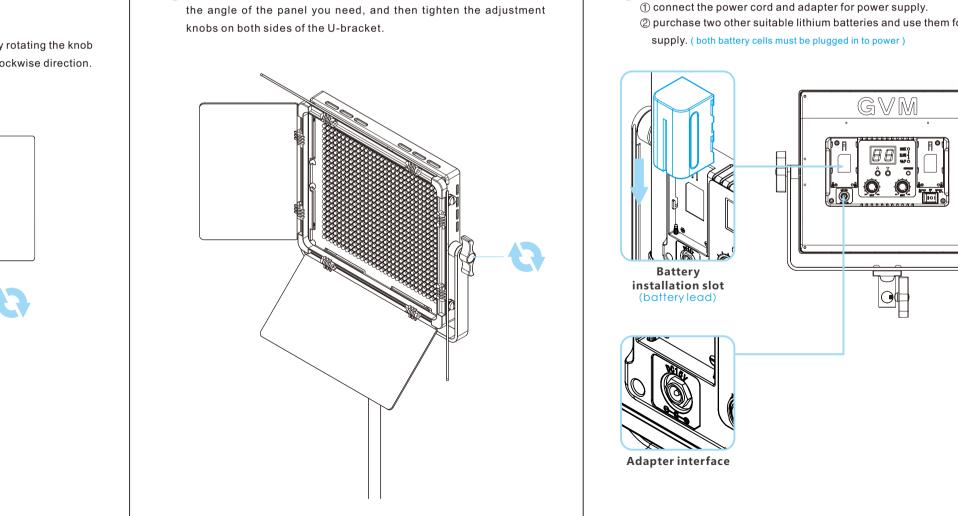

2 Loosen the adjustment knobs on both sides of the U-bracket, adjust 3 There are two power supply modes to choose. ① connect the power cord and adapter for power supply. 2 purchase two other suitable lithium batteries and use them for power 6 Color temperature indicator: when adjust the color temperature knob, the indicator is on Note: indicator (5) and indicator (6) will be on simultaneously when in slave mode

OC15V power input interface 3 Mode button/WIFI reset button: Modes include host mode and slave mode; WIFI username and password reset button 4 Channel addition and subtraction key: adjust channel (0~11) 6 Brightness indicator: when adjust the brightness knob, the indicator

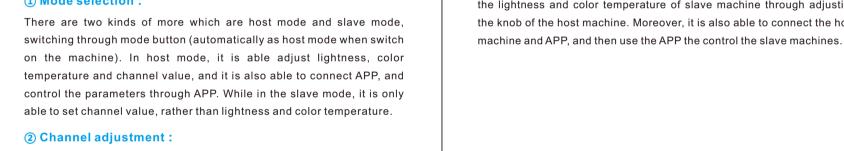

Set channel value using channel addition and subtraction key, ranging

In the host mode, adjust lightness through the knob or APP, ranging from 10% to 99%.

In the host mode, adjust color temperature through the knob or APP, ranging

In the host mode, lightness indicator is on when adjust the lightness through

the knob or APP, and the color temperature indicator in off. However, color temperature indicator is on when adjust the color temperature through the knob or APP, and the lightness indicator in off.

7 Nixie tube: show value including lightness, color temperature and

3 Color temperature adjustment button: adjust the color(3200K~5600K) 9 Brightness adjustment button: adjust the brightness (10%~99%)

In the slave mode, lightness indicator and color temperature indicator both

the devices---select "single and double photography light", then in the

main menu in APP----set----select "switch WIFI", and connect photography

light (WIFI initial username: GVM_LED, password: gvm_admin), once it shows

" successfully connected GVM_LED", return back to the main interface

after it shows "double color temperature LED light (successfully connected

in the main interface, it is allowed to control the lightness, color temperature,

channel value or switch on and off through the control key in APP, and also

Prepare two or more photography lights, set on as host mode and the oth slave mode, and set a same channel value, in this way, it is able to control Set host mode for the photography light (automatically as host mode when the lightness and color temperature of slave machine through adjusting switch on the machine), open "GVM Easily" APP on the mobile phone the knob of the host machine. Moreover, it is also able to connect the hos (meanwhile turn on WIFI on the phone), in the main menu in the APP----switch

- specification to power the product. Do not use power adapter with
- lightness and mode, lightness and color temperature button for once, switch ② The product is not waterproof, please use it in rainproof environment.

- any corrosive liquid.
- 4 When using the product, make sure the product is put firmly and prevent
- from falling and damage.
- 5 If the product will not be used for a product is in because of the APP of mobile phone. button once again to reduce energy loss.

sure there's no "low power" before using it

It is able to reset the WIFI username and password if long press the WIFI re button for over 5 seconds. After resetting, the username and the password w return to the initial (WIFI username: GVM_LED, WIFI password: gvm_admin).

- not light up ② when using lithium battery, make charge the battery Please use the matching power adapter or lithium battery with the sa
- different output voltage parameters. the knob of check if the mode were set as slave press the "mode"

- color temperature of the products cannot be controlled the mode from slave
- are out of control in slave mode
 - power and take out the battery. the screen and the light are off

when the check if the product is "switch off" press the "ON/OFF

the switch indicator light up or not.

indicator does

Clean: Before clean, disconnect the power plug. And use wet cloth rather than any

high temperature environment. If not use the product for a long time, disconnect the

Before using this product, please read the instructions carefully and make sure

Once you use this product, you are deemed to have read the disclaimer and warning carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible

maybe cause harm to yourself and the people around, or even damage the

use the product correctly. If you don't obey the instructions and warnings, yo

product and other things around.

- detergent or soluble liquid, avoiding of damaging the surface layer.
- Power: Make sure the power is in the demanded range, not too high or too low. Correctly load the battery, in order not the damage to machine.
- Repairing: If there is fault or performance degradation, do not unpack the shell by yourself, avoiding damage the machine and lose the right of maintenance. When there
- is fault, do not hesitate to contact us, and we will do our best to deal the problem.
- Accessories: Please use the accessories provided by manufacturer and appre
- ones, in order to maximize the performance.

Guarantee: Do not modify the product, or you will lose the right of maintenance.

User Manual

Power Cord 1

Adapter