

封底 120.00 mm

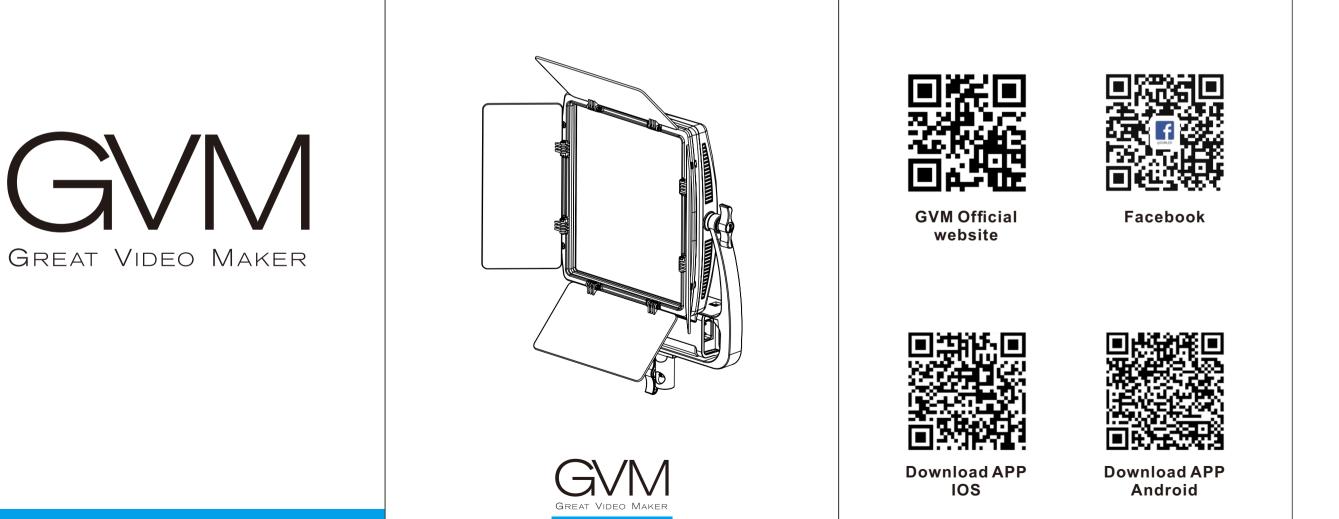

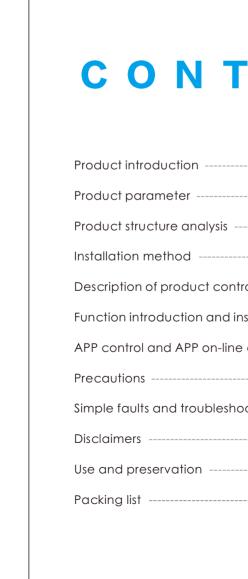

CONTENTS Product introduction ----- Page 1 Product structure analysis ----- Page 3 Installation method ----- Page 4,5,6 Description of product control keys ----- Page 7 Function introduction and instruction for use ----- Page 8,9 APP control and APP on-line control ----- Page 10,11 Simple faults and troubleshooting ----- Page 12 Packing list ----- Page 14

cteristics of the product are :

② APP intelligent control system, which can be controlled by your smart mobile

Thank you for using "GVM-S900D", this product is made for photography enthusiast. The product is applicable for live broadcasting, outdoors, and Name : photography ligh

Weight: 2.75KG

① the feature of two color temperature which allows stepless control, color ♦ Size (mm): 406x318x70 range from 3200K to 5600K, and there are 896 light beads, which contributes $\,$ Origin: Huizhou, China Type: photography fill light

◆ Color-rendering Index : ≥97

Color Temperature: 3200K---5600K

Number of light beads: 896

Luminance: 26000lux/0.5m, 9200lux/1m

Brightness adjusting: stepless adjustment

Power Supply Mode: adapter and battery

Color Temperature adjusting: stepless adjustment

Function / Characteristics : APP, joint control, high color-rendering ③ it has LCD screen and stable system, allowing 360° rotation, with four leaf

Material: ABS

- baffle, to control the light effectively, avoiding of redundant light, custom Voltage: AC:100-240V/DC:15V
- control the fill light, in order to get the desired results in a casual way. Battery Capacity: no battery
- We believe that once using our product correctly, you can make huge progress when shooting. Before using the product, you are strongly recommended to Power specification : DC15V/4A read the instructions below carefully. Heat Dissipation: natural way

Subdued ——— light board Indicator light — Power interface —

1 The lamp can be installed and fixed on the bracket by rotating the knob

Insert the Subdued light board from the top of the light pane 3 Loosen the adjustment knobs on both sides of the U-bracket, adjust the angle of the panel you need, and then tighten the adjustment knobs on both sides of the U-bracket.

4 Connect the light and adapter, plug in the power adapter or batte Connect the lamp after inserting the battery

7 Nixie tube: show value including lightness, color temperature and

mode; WIFI username and password reset button Channel addition and subtraction key: adjust channel (0~11 6 Brightness indicator: when adjust the brightness knob, the indication 6 Color temperature indicator: when adjust the color temperature known

able to set channel value, rather than lightness and color temperature.

There are two kinds of more which are host mode and slave mode, on the machine). In host mode, it is able adjust lightness, color temperature and channel value, and it is also able to connect APP, and control the parameters through APP. While in the slave mode, it is only

In the host mode, adjust lightness through the knob or APP, ranging from

n the host mode, lightness indicator is on when adjust the lightness throu

the knob or APP, and the color temperature indicator in off. However, color temperature indicator is on when adjust the color temperature through ${\it t}$

knob or APP, and the lightness indicator in off.

3 Brightness adjustment button: adjust the brightness (10%~99%) Olor temperature adjustment button: adjust the color (3200K~5600K)

slave mode, and set a same channel value, in this way, it is able to contro the lightness and color temperature of slave machine through adjust the knob of the host machine. Moreover, it is also able to connect the host

button for over 5 seconds. After resetting, the username and the password

light (WIFI initial username: GVM_LED, password: gvm_admin), once it shows " successfully connected GVM_LED", return back to the main interface after it shows "double color temperature LED light (successfully connected specification to power the product. Do not use power adapter with

in the main interface, it is allowed to control the lightness, color temperature channel value or switch on and off through the control key in APP, and also

Set host mode for the photography light ($\it automatically as host mode \it when$

the devices---select "single and double photography light", then in the

main menu in APP----set----select "switch WIFI", and connect photography

meanwhile turn on WIFI on the phone), in the main menu in the APP----switch

When using the product, make sure the product is put firmly and prevent

when the check if the product is "switch off" press the "ON/OFF" product is in because of the APP of mobile phone. button once again

the switch indicator light up or not.

not light up ② when using lithium battery, make charge the battery

the knob of check if the mode were set as slave press the "mode"

lightness and mode, lightness and color temperature button for once, switch

sure there's no "low power" before using it

- Before using this product, please read the instructions carefully and make sur use the product correctly. If you don't obey the instructions and warnings, you maybe cause harm to yourself and the people around, or even damage the
- product and other things around. Once you use the product, it means you have already read the disclaimer and the warnings carefully, understanding and agreeing with all the items, and promise to

take responsibility of any consequences of using the product. Main machine 1

color temperature of the products cannot be controlled the mode from slave high temperature environment. If not use the product for a long time, disconnect the power and take out the battery.

Clean: Before clean, disconnect the power plug. And use wet cloth rather than any

load the battery, in order not the damage to machine.

Repairing: If there is fault or performance degradation, do not unpack the shell by yourself, avoiding damage the machine and lose the right of maintenance. When there is fault, do not hesitate to contact us, and we will do our best to deal the problem.

Accessories: Please use the accessories provided by manufacturer and appones, in order to maximize the performance.

Guarantee: Do not modify the product, or you will lose the right of maintenan

Power cord 1