



total control

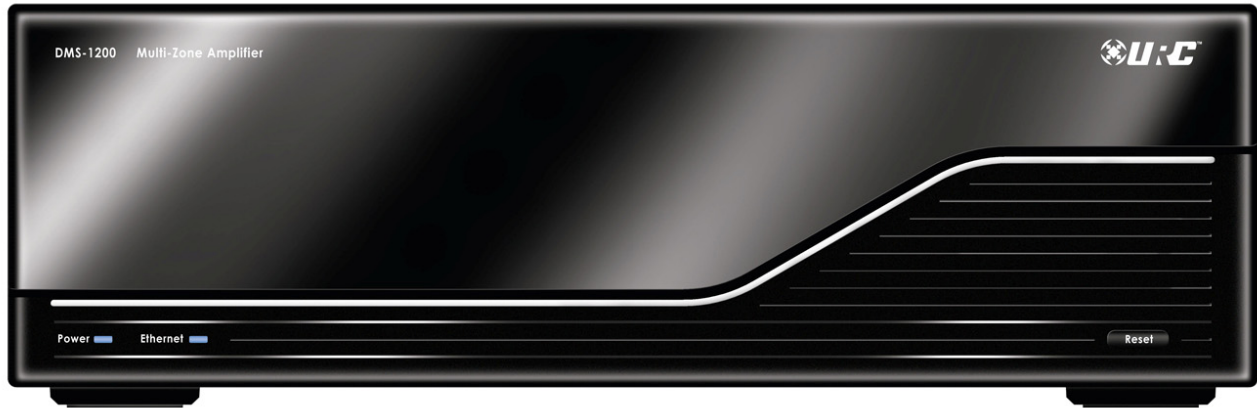


DMS-1200

Multi-zone Amplifier

Eight (8) zones ■ 50 watts per channel for zones 1 through 6; preamp only for zones 7 and 8
■ Expandable up to 32 zones ■ Four (4) Analog-to-Digital inputs that stream to other DMS amps ■ Can be programmed off premises via the internet and MRX-10 ■ Easy rack-mounting via optional RMK-3 rack mounting kit

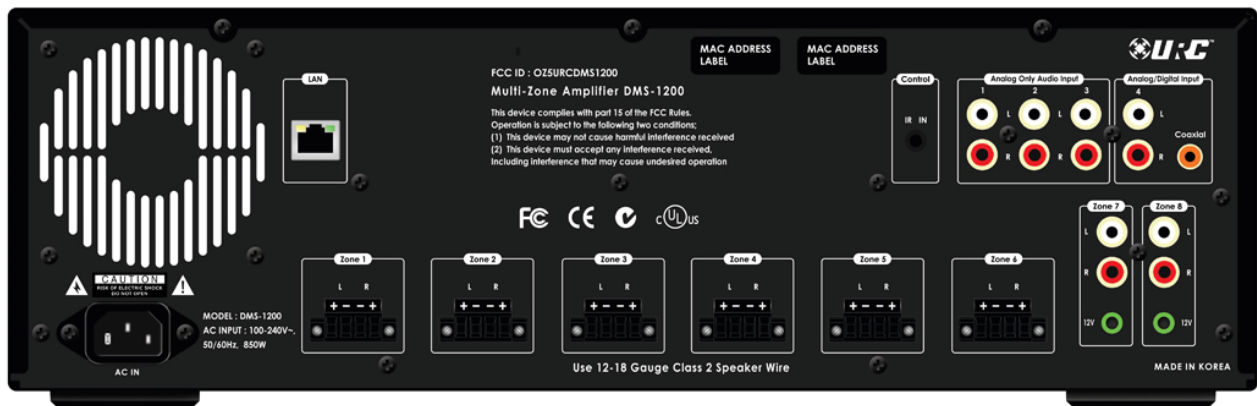

DMS-1200 Multi-zone Amplifier

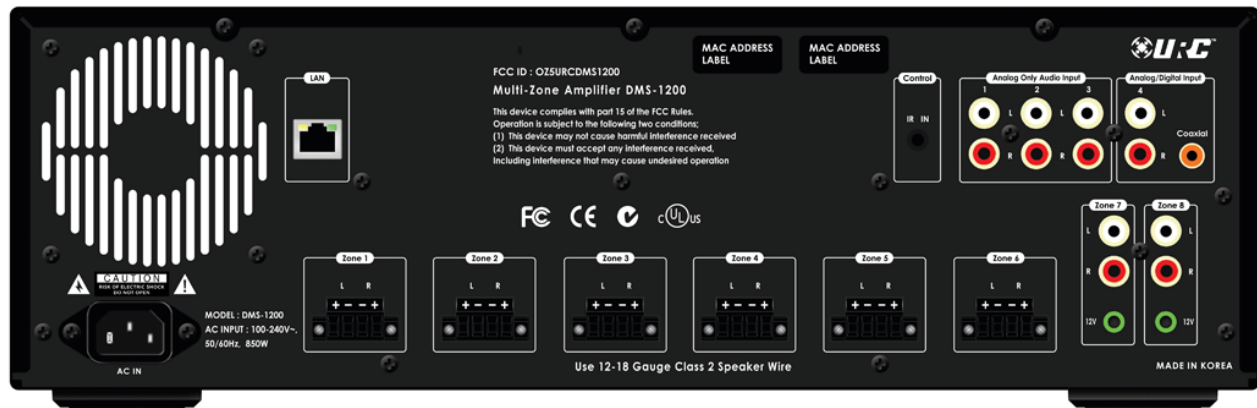

specifications

| | |
|--|--|
| * Network | One 10/100 Ethernet port (Indicator 2LED) |
| * IR One Way & IP Two Way Control | YES |
| * Indicators | 1 Power BLUE LED - Blink when resetting / 1 Network BLUE LED Indicates |
| * Zones of Stereo Audio | Eight: six Powered Zones, two preamp only zones |
| * Rated Wattage per Channel | 50 watts per channel @ 8 ohms, stable to 4 ohms |
| * Automatic Low Volume Loudness Compensation | Installer Configured for Type and Size of Audio Zone |
| * Installer Configured EQ | Bass Boost, Treble Boost, 5-Band parametric EQ, |
| * Input sensitivity | 600~2200mVp-p / 10Kohm* |
| * User Adjustable Audio Controls | Bass, Treble and Balance |
| * Receives All SNP and DMS Generated Streams | Yes |
| * Inputs | 4 Stereo Line Inputs, ALL stream to all other DMS Amplifiers |
| * Zone 7 and 8 Preamp Output Options | Configurable to Fixed Line Level Output (external amplifier can be triggered by 12V trigger) |
| * Power Supply | AC 100~245V, 50/60Hz |
| * Power consumption | 3~6A |
| * Maximum external Dimensions | 5.25" x 17" x 16" (H x W x D) |
| * Weight | 26.7 lbs. (12.1 Kg) |