

### You spin me right round, Baby, right round...

The 3G Warp Engine Transmitter rotates any video signal up to 360 degrees.

The 3G Warp Engine Transmitter can be added to a currently installed Just Add Power 3G system to rotate any source in the system.

A single 3G Warp Engine Transmitter can build a full Mosaic Video Wall with displays rotated at any angle\* and the ability to show any source in the system!

**Seamless Integration!** The 3G Warp Engine Transmitter is fully compatible with all 3G installations. Add a single Warp Engine to provide rotation to all displays. Multiple Warp Engines can be combined to produce more complex Mosaic Video Walls.



TX - VIDEO OUT


RX - VIDEO IN

<b>Compliance</b>	HDCP & RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Supported Resolutions</b>	Up to 4096x2160 (interlaced & progressive)
<b>Dimensions &amp; Weight</b>	220 x 44.5 x 124 mm 8.66" x 1.75" x 4.88" (19-inch rack, 1 RU with wings) 0.64 kg / 1.4 lb
<b>Ports</b>	Ethernet connector (x2)
<b>Bandwidth</b>	Up to 600 Mbps
<b>POE</b>	10 watts maximum
<b>Power Supply (not included)</b>	DC12V, 2A minimum 5.5mm/2.1mm, Positive tip


Features
Rotate video up to 360 degrees
<ul style="list-style-type: none"> <li>1 Receiver and 1 Transmitter</li> <li>Any video input from 3G system</li> <li>New, rotated video output</li> <li>Rotated video viewable on any Receiver</li> </ul>
Compatible with all 3G products
Image Pull



All measurements in millimeters (mm)

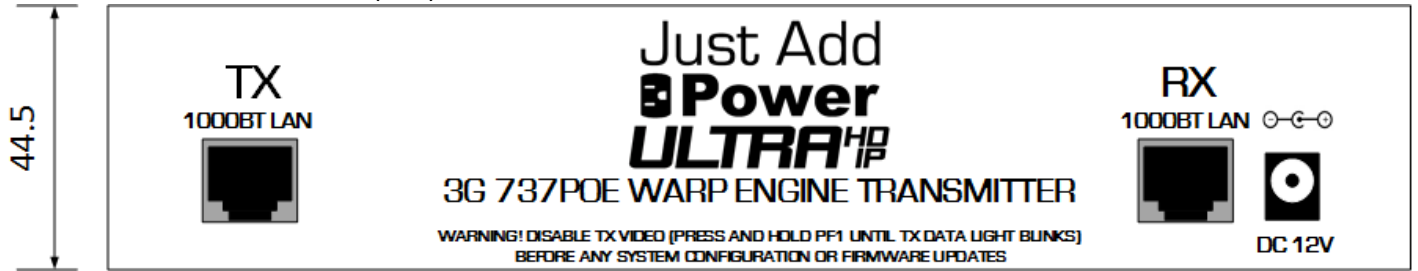

220

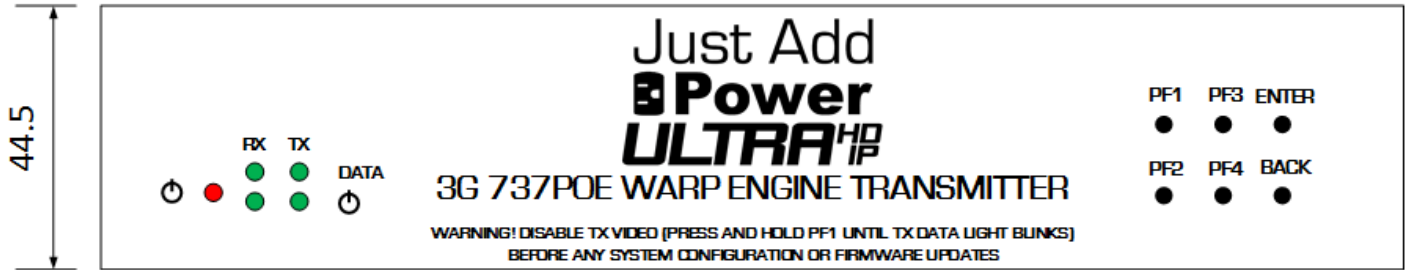

737POE Front and Back