




Application and project description

Secure and reliable connectivity for professional industrial applications in telecommunications, energy supply and traffic surveillance. The multifunctional Garderos R-2700 Series routers are specially manufactured for use in remote, difficult accessible locations with harsh environmental parameters, such as extreme temperatures.

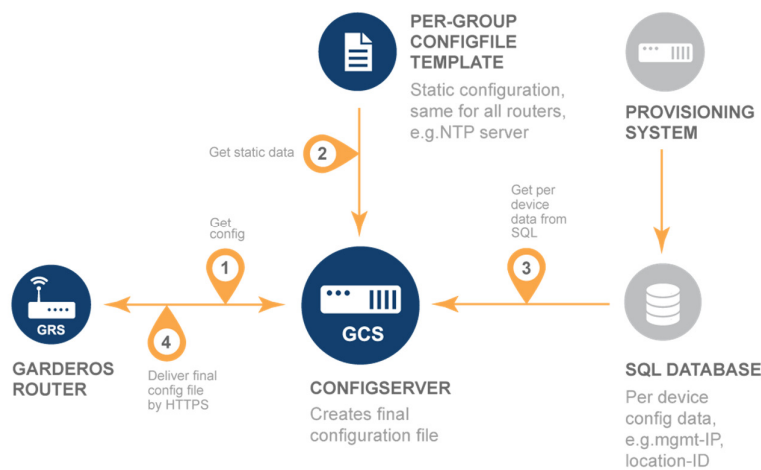

Core functions

- Central administration
- Scalable to several thousand routers with one web server
- Routers periodically check for updates
- Hardware- and configurable software-watchdogs for highest availability
- Standard interfaces for easy integration into existing infrastructure
- "Cyber Security" by design, secure protocols and functions

HARDWARE FEATURES

| | |
|-----------------------------|--|
| Casing | <p>Material Diecast and strand casting aluminium</p> <p>Dimensions without / with connectors (HxD) ~61x122,5mm / ~61x122,5mm</p> <p>Diameter 99mm</p> <p>Weight without ~0.5kg</p> <p>Ingress protection IP43 (IP67 top / IP43 bottom)</p> <p>IEC protection class 3</p> <p>Mounting 6 eyelets, each on top and bottom, for fixing with cable straps and mounting holes for external DIN rail clip or mounting bracket</p> |
| Temperature range | <p>Operating temperature range depends on router model. Please see "ordering information".</p> |
| Interfaces on casing | <p>Power connector Phoenix 2 pin</p> <p>Serial connector 1x RJ-45 console/data</p> <p>WWAN antenna connector up to 4x SMA (female)</p> <p>Ethernet connector 2x RJ-45; additional 1x RJ-45 (optional)</p> <p>SFP connector 1x SFP cage (optional)</p> <p>WLAN antenna connector up to 2x RP-SMA (female)</p> <p>SIM card slot 2x Mini-SIM (thermore resistant) or 1x Mini-SIM + 1x MFF-SIM chip (optional)</p> |
| Power supply | <p>Input voltage 12-60 VDC</p> <p>Power consumption ~4-10W</p> |
| Serial interface | <p>RS-232 (console) 1x</p> <p>RS-485 half-duplex (data) 1x</p> |
| WAN | Ethernet (see LAN) |
| WWAN | <p>Technology/Bands 2G/3G¹⁾, 2G/3G/4G²⁾, CDMA³⁾, 4G^{4), 5)}</p> <p>CDMA EVDO, 1x for CDMA³⁾</p> <p>CDMA RUIIM, non-RUIIM for CDMA³⁾</p> <p>Dual WWAN</p> |
| LAN | <p>Ethernet 2x 10/100/1000BT add. 1x 10/100/1000BT or 1x SFP 1000Base-X (optional)</p> <p>Autosensing Auto-MDIX</p> |
| WLAN | <p>Supported standards 1x 802.11n a/b/g or 1x 802.11n b/g</p> |
| Other features | <p>Hardware watchdog Monitors "heartbeats" from router OS. Restarts router in case of software problems.</p> <p>Cryptographic hardware accelerator md5, aes, des, 3des, sha1, sha512</p> |
| Certifications | <p>Criteria for EMI immunity and radiation IEC 61850-3</p> <p>Vibration resistant EN 60068-2-6:2008</p> <p>Shock resistant EN 60068-2-27:2009</p> |
| Regulations | RoHS, CE, FCC |

¹⁾ **2G/3G Module**
WCDMA
800/850/900/AWS1700/1900/2100MHz
EDGE/GPRS/GSM
850/900/1800/1900MHz
HSPA+ peak download speed: 21.1 Mbps
HSPA+ peak upload speed: 5.76 Mbps

²⁾ **2G/3G/4G Module (European variant*)**
LTE 800/1800/2600 MHz
WCDMA 900/2100MHz
EDGE/GPRS/GSM 900/1800/1900MHz
HSPA+ peak download speed: 21.1 Mbps
HSPA+ peak upload speed: 5.76 Mbps
LTE peak download speed: 100 Mbps
LTE peak upload speed: 50 Mbps

*other variants available e.g. for NA

³⁾ **CDMA 450MHz**
EV-DO Rev. A, B
1xRTT
R-UIM and non R-UIM

⁴⁾ **4G Module, PPP mode**
LTE 450/800/1800/2600
LTE peak download speed: 100 Mbps
LTE peak upload speed: 50 Mbps

⁵⁾ **4G Module, QMI mode**
LTE 450/800/1800/2600
LTE peak download speed: 100 Mbps
LTE peak upload speed: 50 Mbps

ROUTING FEATURES

Operating system

- Garderos Router Software (GRS) Rel. 3.2

Common

- IPv4
- IPv6
- IPv4/IPv6 dual stack

WWAN ¹⁾

- PPP over WWAN ^{1), 2), 3), 4)}
- Dual WAN (Cellular, Ethernet, VLAN) ^{1), 2), 3), 4), 5)}
- Dual WWAN (WWAN, WWAN) ^{1), 2), 3), 4), 5)}
- Multiple APN ⁵⁾
- Intelligent APN selection ^{2), 5)}
- CDMA RUIIM and non-RUIIM ³⁾
- CDMA ESN and MEID authentication ³⁾

WLAN ¹⁾

- 802.11n a/b/g or 802.11n b/g
- Access point and client mode
- Configurable channel
- Configurable transmit power
- Hidden SSID
- Intracell traffic blocking
- Multiple SSID
- WEP (64 and 128 bit), WPA and WPA2
- 802.1x
- EAP (802.11i, RADIUS authentication, TLS, SIM)

Other network interfaces

Bridge

- Layer 2 bridge interface
- STP

Ethernet

- Configurable link speed
- IP assignment static IP, DHCP, PPPoE, IPv6 SLACC
- Port mirroring

Local loop

- Local loop interface

PPPoE

- IP assignment static IP, PPPoE, IPv6 SLAAC
- PAP and CHAP
- Always on
- Time controlled session termination before provider reconnect

VLAN

- VLAN support (802.1q and priority tagging)
- IP assignment static IP, DHCP, PPPoE, IPv6 SLAAC

Routing

- Static routes (IPv4, IPv6)
- Dynamic routing protocols RIPv2, OSPFv2, BGPv4
- Filtering for dynamic routing protocols
- Firewall (IPv4, IPv6)
- Firewall (packet filter)
- Firewall (connection tracking)
- MAC address filter
- Invalid-packet-filter
- NAT (IPv4, IPv6)
- NAT (PAT and 1-to-1)
- Source-NAT (SNAT)
- Port forwarding
- Configurable MTU
- Path MTU discovery
- TCP MSS adjustment
- Diffserv (set DSCP bits based on IP-source/destination address and/or ports/protocols)
- QoS packet prioritization (bandwidth reservation based on IP-source/destination address and/or ports/protocols)
- Reverse path filter

VPN

- GRE
- GRE

- GRE IPv6
- Configurable MTU and MTU inherit
- GRE TAP
- GRE TAP IPv6

IPsec

- IPsec IPv4, IPv6
- IKEv1, IKEv2
- PSK and certificate authentication
- Tunnel and transport mode
- Encryption algorithms AES, DES, 3DES, AES256
- Phase 1 key length up to 8192 bit
- Phase 2 key length up to 6144 bit
- Throughput max. 119 Mb/s
- Throughput (3des-sha1-modp1024) 105 Mb/s
- Throughput (aes-sha256-modp4096) 119 Mb/s
- VPN gateway
- Min. number tunnels: 5
- NHRP dynamic tunnel management

Open VPN

- PSK and certificate authentication
- Min. number tunnels: 5
- OpenVPN Layer 2 and 3
- Bridging OpenVPN Layer 2 Tunnel

Router management

- RS-232 management console
- Administrator authentication by TACACS+, RADIUS, password file and public key authentication
- Administrator roles
- Command line interface (CLI)
- Remote configuration file download (HTTP/HTTPS)
- OSCP (configuration file download)
- HTTP basic authentication for config-file download
- Certificate authentication for configuration file download
- Remote software updates
- Central bulk management of routers

Services

- Cronjob
- DHCP server (IPv4)
- DHCP relay (IPv4+IPv6)
- DHCP address pools per VLAN/interface
- DHCP secure ARP
- DHCP ARP ping before assigning lease
- DHCP accounting (RADIUS)
- DNS server and proxy
- DynDNS client
- Ethernet port security (sticky MAC detection)
- IPv6 SLAAC daemon on Ethernet
- NTP client, server
- NTP with MD5 authentication
- SNMPv2 and SNMPv3
- SNMP monitoring and traps
- SSH client, server
- Syslog local, remote
- Telnet client, server

Other functions

- Configurable LED (also project based)
- Hardware and software watchdogs
- LXC virtualization (project based)
- Link monitor (ping)
- Security hardening (switch off unsecure features)
- Serial-to-network proxy (ser2net)
- Serial modes: Console, Off and Script
- Scripting interface
- Open APIs for network integration

¹⁾ Prerequisite is a suitable interface.
^{1), 2), 3), 4), 5)} Please see "Hardware Features".

ORDERING INFORMATION

**Garderos
model number:**

^{1), 2), 3), 4), 5)} Please see "Hardware Features".

| | Ethernet (10/100/1000 BT) | SFP (1000Base-X) | RS-232 (console) | WLAN (802.11n a/b/g or 802.11n b/g) | 2G/3G Module ¹⁾ | 2G/3G/4G EU-Module ²⁾ or 4G Module ^{4), 5)} | CDMA 450MHz ³⁾ | Maximum operating temperature range (The temperature range may differ depending on the router variant) |
|----------------------------|---------------------------|------------------|------------------|-------------------------------------|----------------------------|---|---------------------------|---|
| R-2701 (2x LAN/WLAN) | 2+1 (opt.) | 1 (opt.) | 1 | 1 | | | | -40°C to +75°C |
| R-2707 (2x LAN) | 2+1 (opt.) | 1 (opt.) | 1 | | | | | -40°C to +75°C |
| R-2721 (2x LAN/3G/WLAN) | 2+1 (opt.) | 1 (opt.) | 1 | 1 | 1 | | | -40°C to +75°C |
| R-2722 (2x LAN/4G/WLAN) | 2+1 (opt.) | 1 (opt.) | 1 | 1 | | 1 | | -40°C to +75°C |
| R-2727 (2x LAN/3G) | 2+1 (opt.) | 1 (opt.) | 1 | | 1 | | | -40°C to +75°C |
| R-2728 (2x LAN/4G) | 2+1 (opt.) | 1 (opt.) | 1 | | | 1 | | -40°C to +75°C |
| R-2747 (2x LAN/3G/CDMA) | 2+1 (opt.) | 1 (opt.) | 1 | | 1 | | 1 | -40°C to +75°C |
| R-2748 (2x LAN/4G/CDMA) | 2+1 (opt.) | 1 (opt.) | 1 | | | 1 | 1 | -40°C to +75°C |
| R-2751 (2x LAN/3G/4G/WLAN) | 2 | | 1 | 1 | 1 | 1 | | -40°C to +75°C |
| R-2752 (2x LAN/4G/4G/WLAN) | 2 | | 1 | 1 | | 2 | | -40°C to +75°C |
| R-2757 (2x LAN/3G/4G) | 2+1 (opt.) | 1 (opt.) | 1 | | 1 | 1 | | -40°C to +75°C |
| R-2758 (2x LAN/4G/4G) | 2+1 (opt.) | 1 (opt.) | 1 | | | 2 | | -40°C to +75°C |
| R-2759 (2x LAN/3G/3G) | 2+1 (opt.) | 1 (opt.) | 1 | | 2 | | | -40°C to +75°C |
| R-2771 (2x LAN/CDMA/WLAN) | 2+1 (opt.) | 1 (opt.) | 1 | 1 | | | 1 | -40°C to +75°C |
| R-2777 (2x LAN/CDMA) | 2+1 (opt.) | 1 (opt.) | 1 | | | | 1 | -40°C to +75°C |

Garderos GmbH
Balanstrasse 55
81541 Munich
Germany

www.garderos.com
Email: info@garderos.com

T: +49 89 189306-0
F: +49 89 189306-98

All trademarks shown are registered trademarks of their respective owners.
 Please note that all data and information subject to technical modifications.
 © 2016: Garderos GmbH | Fact Sheet R-2700 Series | Version 1.03 – September 2016