




Application and project description

Secure and reliable connectivity for professional industrial applications in telecommunications, energy supply and traffic surveillance. The router of the Garderos R-7800 Series are specially designed for the use at remote, difficult accessible locations with harsh environmental parameters and the need to connect many devices.

Core functions

- Central administration
- Scalable to several thousand routers with one web server
- Routers periodically check for updates
- Hardware- and configurable software-watchdogs for highest availability
- Standard interfaces for easy integration into existing infrastructure
- "Cyber Security" by design, secure protocols and functions

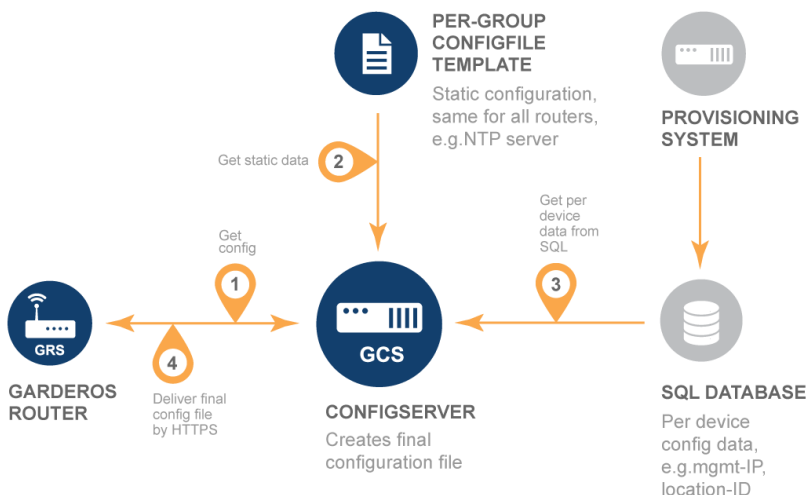

HARDWARE FEATURES

Casing	Material Dimensions (WxHxD) without / with Weight Ingress protection IEC protection class Mounting	Diecast aluminium 80.5x111x116mm / 80.5x111x121mm ~0.75kg IP40 3 Integrated DIN rail clip and mounting holes for external DIN rail clip or mounting bracket
Temperature range		Operating temperature range depends on router model. Please see "ordering information".
Interfaces on casing	Power connector Serial connector WWAN antenna connector Ethernet connector WLAN antenna connector GPS antenna connector SIM card slot DSL connector	Phoenix 2 pin 1x RJ-45 console/data + 1x D-Sub 9 (female) data (optional) up to 4x SMA (female) 5x RJ-45 up to 2x RP-SMA (female) 1x SMA (female) (optional) 2x Mini-SIM (thermoreistant) or 1x Mini-SIM + 1x MFF-SIM chip (optional) 1x RJ-45 (depends on router model)
Power supply	Input voltage Power consumption	12-60 VDC (9,6VDC - 72VDC tolerance) ~5-16W
Overheating protection	ambient temperature	off CPU >100°C on CPU < 80°C
Serial interface	RS-232 (console) RS-485 half-duplex (data) RS-232 (data)	1x 1x 1x (opt., see ordering inform.)
WAN	xDSL Ethernet (see LAN)	ADSL2+,VDSL2, PTM/ATM Mode
WWAN interface	Technology CDMA EVDO, 1x CDMA RUIIM, non-RUIIM Passive GPS Dual WWAN	2G/3G ¹⁾ , 2G/3G/4G ^{2),7),9)} , CDMA ³⁾ , 4G ^{4),5)} , 3G/4G ⁶⁾ , 2G/4G ⁸⁾ CDMA ³⁾ CDMA ³⁾ 2G/3G/4G ^{2),9)}
LAN interface	Ethernet Autosensing Auto-MDix	1x 10/100/1000BT + 4 Port 10/100/1000BT Managed Switch
WLAN interface	Supported standards	1x 802.11ac a/b/g/n
Other features	Hardware watchdog	Monitors "heartbeats" from router OS. Restarts router in case of software problems.
Certifications	Criteria for EMI immunity and radiation Vibration resistant Shock resistant	IEC 61000-6-2:2005 (depends on router model) EN 60068-2-6:2008 EN 60068-2-27:2009
Regulations	RoHS, CE, FCC	

¹⁾ **2G/3G Module (European variant*)**
WCDMA B1, B5, B8
EDGE/GPRS/GSM 850/900/1800/1900MHz

²⁾ **2G/3G/4G Module (European variant*)**
LTE B3, B7, B20
WCDMA B1, B5, B8
EDGE/GPRS/GSM 900/1800MHz

³⁾ **CDMA 450MHz Module**
EV-DO Rev. A, B
1xRTT
R-UIM and non R-UIM

⁴⁾ **4G Module, PPP Mode**
LTE B3, B7, B20, B31

⁵⁾ **4G Module, QMI Mode**
LTE B3, B7, B20, B31

⁶⁾ **3G/4G Module (CAT6)**
LTE B1, B3, B5, B7, B8, B18, B19,
B21, B28, B38, B39, B40, B41
WCDMA B1, B5, B6, B8, B9, B19

⁷⁾ **2G/3G/4G Module (European variant*)**
LTE B1, B3, B7, B8, B20
WCDMA B1, B8
EDGE/GPRS/GSM 900/1800MHz

⁸⁾ **2G/4G Module (CAT1, European variant*)**
LTE B1, B3, B7, B8, B20
EDGE/GPRS/GSM 900/1800MHz

⁹⁾ **2G/3G/4G Module (CAT4, global variant)**
LTE B1, B2, B3, B4, B5, B7, B8, B12, B13, B18, B19, B20,
B26, B28, B38, B39, B40, B41
WCDMA B1, B2, B4, B5, B6, B8, B19
EDGE/GPRS/GSM 850/900/1800/1900MHz

*other variants available e.g. for NA

SOFTWARE FEATURES

Operating system

- Garderos Router Software (GRS) Rel. 3.5

Common

- IPv4
- IPv6
- IPv4/IPv6 dual stack
- IPv6 prefix delegation

WWAN ¹⁾

- PPP over WWAN ^{1), 2), 3), 4)}
- Dual WAN (WWAN, Ethernet, VLAN) ^{1), 2), 3), 4), 5), 6), 7), 8), 9)}
- Dual WWAN (WWAN, WWAN) ^{1), 2), 3), 4), 5), 6), 7), 8), 9)}
- Configurable WWAN network selection ^{1), 2), 4), 5), 6), 7), 8), 9)}
- Configurable WWAN band selection ^{6), 9)}
- Multiple APN ^{5), 7), 8)}
- Intelligent APN selection ^{2), 5), 7), 8), 9)}
- IPv6 Prefix Delegation ^{5), 7), 8)}
- CDMA RUIIM and non-RUIIM ³⁾
- CDMA ESN and MEID authentication ³⁾

WLAN ¹⁾

- 802.11ac a/b/g/n
- Access point and client mode
- Configurable channel
- Configurable transmit power
- Hidden SSID
- Intracell traffic blocking
- Multiple SSID
- WEP (64 and 128 bit), WPA and WPA2
- 802.1x
- EAP (802.11i, RADIUS authentication, TLS, SIM)

Other network interfaces

Bridge

- Layer 2 bridge interface
- STP, RSTP
- IP assignment static IP, DHCP, IPv6 SLACC

Ethernet

- Configurable link speed
- IP assignment static IP, DHCP, IPv6 SLACC, PD
- Port mirroring
- Switching
- Switch port separation
- Switch VLANs up to 16
- Switch 802.1q VLAN tagged and untagged
- Switch with Layer 2 multicast/broadcast

Local loop

- Local loop interface

PPPoE

- IP assignment static IP, PPPoE, IPv6 SLAAC
- PAP and CHAP
- Always on
- Time controlled session termination before provider reconnect

VLAN

- VLAN support (802.1q and priority tagging)
- IP assignment static IP, DHCP, IPv6 SLAAC, PD

Routing

- Static routes (IPv4, IPv6)
- Static policy routing (IPv4, IPv6)
- Static routes to DHCP gateway (IPv4)
- Dynamic routing protocols RIPv2, OSPFv2, OSPFv3, BGPv4
- Filtering for dynamic routing protocols
- Firewall (IPv4, IPv6)
- Firewall (packet filter)
- Firewall (connection tracking)
- MAC address filter
- Invalid-packet-filter
- NAT (IPv4, IPv6)
- NAT (PAT and 1-to-1)
- Source-NAT (SNAT)
- Port forwarding
- Configurable MTU
- Path MTU discovery
- TCP MSS adjustment
- Diffserv (set DSCP bits based on IP-source/destination address and/or ports/protocols)
- QoS packet prioritization (bandwidth reservation based on IP-source/destination address and/or ports/protocols)
- Reverse path filter

¹⁾ Prerequisite is a suitable interface.

^{1), 2), 3), 4), 5), 6), 7), 8), 9)} Please see "Hardware Features".

VPN

GRE

- GRE
- GRE IPv6
- Configurable MTU and MTU inherit
- GRE TAP
- GRE TAP IPv6

IPsec

- IPsec IPv4, IPv6
- IKEv1, IKEv2
- Authentication: PSK, public key, RSA and ECDSA certificate
- Tunnel and transport mode
- VTI (virtual tunnel interface)
- Encryption algorithms AES, DES, 3DES, AES256
- Phase 1 key length up to 8192 bit
- Phase 1 elliptic curves
- Phase 2 key length up to 6144 bit
- Phase 2 elliptic curves
- Throughput max. 60 Mb/s
- Throughput (3des-sha1-modp1024) 21 Mb/s
- Throughput (aes-sha256-modp4096) 39 Mb/s
- VPN gateway
- Min. number tunnels: 5
- NHRP dynamic tunnel management

L2TP

- Unmanaged L2TPv3 tunnel
- VLAN tagged L2TPv3 tunnel

Open VPN

- PSK, user and certificate authentication
- Min. number tunnels: 5
- OpenVPN Layer 2 and 3
- Bridging OpenVPN Layer 2 Tunnel

MIP

- Mobile IP foreign agent

Router management

- RS-232 management console
- Administrator authentication by TACACS+, RADIUS, password file and public key authentication
- Administrator roles
- Command line interface (CLI)
- Remote configuration file download (HTTP/HTTPS)
- OCSP (configuration file download)
- HTTP basic authentication for config-file download
- Certificate authentication for configuration file download
- Remote software updates
- Central bulk management of routers

Services

- Cronjob
- DHCP server (IPv4+IPv6)
- DHCP relay (IPv4+IPv6)
- DHCP snooping (IPv4)
- DHCP address pools per VLAN/interface
- DHCP secure ARP
- DHCP ARP ping before assigning lease
- DHCP accounting (RADIUS)
- DNS server and proxy
- DynDNS client
- Ethernet port security (sticky MAC detection)
- Hotspot portal
- IPv6 SLAAC daemon
- LLDP
- NMEA ^{2), 9)}
- NTP client, server
- NTP with MD5 authentication
- SNMPv2 and SNMPv3
- SNMP monitoring and traps
- SSH client, server
- Syslog local, remote, persistent in flash
- Telnet client, server

Other functions

- Configurable LED (also project based)
- Hardware and software watchdogs
- LXC virtualization (project based)
- Link monitor (ping)
- Security hardening (switch off unsecure features)
- Encrypted configuration
- Serial-to-network proxy (ser2net)
- Serial modes: Console, Off and Script
- Scripting interface
- Open APIs for network integration

ORDERING INFORMATION

Garderos model number: 1), 2), 3), 4), 5), 6), 7), 8), 9) Please see "Hardware Features".	Ethernet (1x 10/100/1000BT + 4-Port 10/100/1000BT Managed Switch)	RS-232 (console)	RS-232 (data): optional	WLAN (802.11ac a/b/g/n)	XDSL	2G/3G/4G Module ^{2), 7), 9)} 4G Module ^{4), 5)} 3G/4G Module ⁶⁾ 2G/4G Module ⁸⁾	CDMA 450 Module ³⁾	Maximum operating temperature range (The temperature range may differ depending on the router variant)
R-7801 (5xLAN/WLAN)	5	1	1	1				-25°C to +70°C
R-7807 (5xLAN)	5	1	1					-40°C to +75°C
R-7811 (5xLAN/xDSL/WLAN)	5	1		1	1			-25°C to +60°C at 12-24VDC -25°C to +50°C at 60VDC
R-7817 (5xLAN/xDSL)	5	1			1			-35°C to +60°C at 12-24VDC -35°C to +50°C at 60VDC
R-7822 (5xLAN/4G/WLAN)	5	1	1	1		1		-25°C to +70°C
R-7828 (5xLAN/4G)	5	1	1			1		-40°C to +75°C
R-7831 (5xLAN/xDSL/CDMA/WLAN)	5	1		1	1		1	-25°C to +60°C at 12-24VDC -25°C to +50°C at 60VDC
R-7837 (5xLAN/xDSL/CDMA)	5	1			1		1	-35°C to +60°C at 12-24VDC -35°C to +50°C at 60VDC
R-7848 (5xLAN/4G/CDMA)	5	1	1			1	1	-35°C to +75°C
R-7849 (5xLAN/CDMA/CDMA)	5	1	1				2	-35°C to +75°C
R-7858 (5xLAN/4G/4G)	5	1	1			2		-40°C to +75°C
R-7862 (5xLAN/xDSL/4G/WLAN)	5	1		1	1	1		-25°C to +60°C at 12-24VDC -25°C to +50°C at 60VDC
R-7868 (5xLAN/xDSL/4G)	5	1			1	1		-35°C to +60°C at 12-24VDC -35°C to +50°C at 60VDC
R-7871 (5xLAN/CDMA/WLAN)	5	1	1	1			1	-25°C to +70°C
R-7877 (5xLAN/CDMA)	5	1	1				1	-35°C to +75°C

Garderos GmbH
Balanstrasse 55
81541 Munich
Germany

www.garderos.com
Email: info@garderos.com

T: +49 89 189306-0
F: +49 89 189306-98

All trademarks shown are registered trademarks of their respective owners.
 Please note that all data and information subject to technical modifications.
 © 2019: Garderos GmbH | Data Sheet R-7800 Series | Version 1.10 – November 2019