

R3000 robustOS

Industrial Dual SIM Cellular VPN Router
2 Eth + 1 RS-232 + 1 RS-485 + 1 USB Host



INTRODUCTION

The Robustel Industrial Dual SIM Cellular VPN Router (R3000) is a rugged cellular router offering state-of-the-art mobile connectivity for machine to machine (M2M) applications.


R3000 is a powerful router developed from **RobustOS**, a Robustel self-developed and Linux-based operating system which is designed to be used in Robustel devices. The RobustOS includes basic networking features and protocols providing customers with a very good user experience. Meanwhile, Robustel offers a **Software Development Kit (SDK)** for partners and customers to allow additional customization by using C, Python or Java. It also provides rich **Apps** to meet fragmented IoT market demands.

Robustel is a leading global industrial IoT/M2M hardware and solution provider. Since its establishment in 2010 in Guangzhou, China, Robustel has been focusing on designing and manufacturing industrial cellular routers, gateways, modems, cloud platforms and E2E solutions. In order to support global business in more than 100+ countries and regions, Robustel has set up local offices in Germany, Australia, the Netherlands, the UK, Japan and Hong Kong.

KEY FEATURES

- The feature *Link Manager* supports WWAN1, WWAN2, Ethernet WAN, WLAN WAN link backup and ICMP detection
- The option *Backup Mode* supports cold, warm and load balancing
- Supports IPv6
- RobustOS + SDK + App
- IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN
- Management and maintenance via Web/CLI/SNMP/RCMS Cloud
- Robust industrial design (9 to 60V DC, desktop or wall mounting or DIN rail mounting)

APPLICATION EXAMPLE

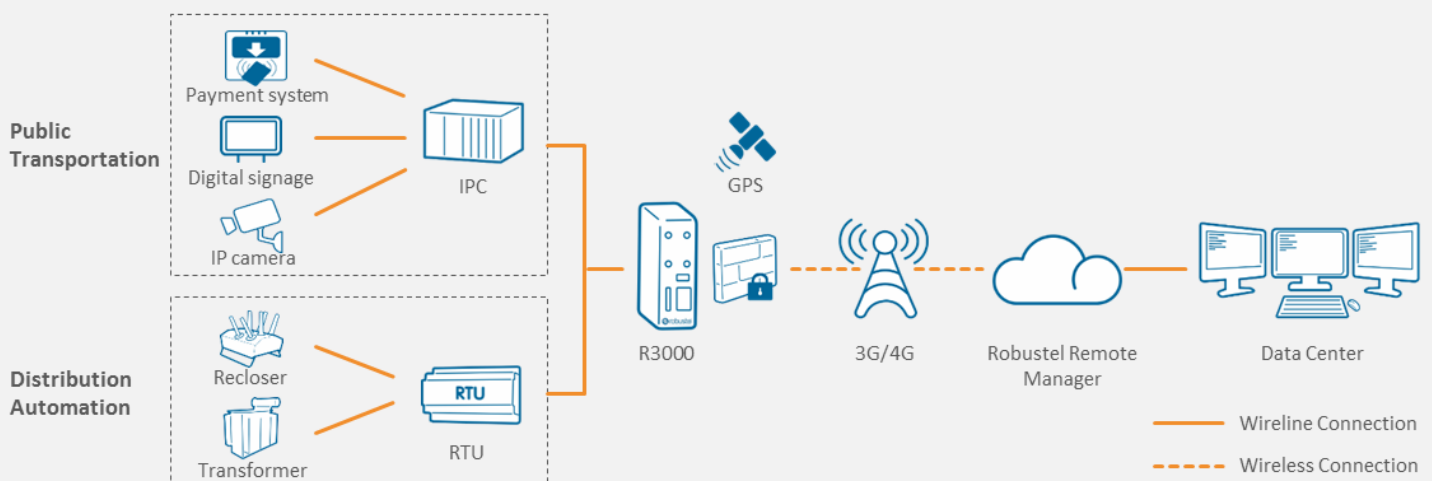

SPECIFICATIONS

Cellular Interface

Number of antennas	2 (MAIN + AUX)
Connector	SMA-K
SIM	2 (3 V & 1.8 V)

Ethernet Interface

Number of ports	2 x 10/100 Mbps, 2 x LAN or 1 x LAN + 1 x WAN
Magnet isolation	1.5 KV

WiFi Interface (Optional)

Number of antennas	1
Connector	RP-SMA-K
Standards	802.11a/b/g/n, supports AP and Client modes
Frequency bands	2.4 GHz 5 GHz
Security	Open, WPA, WPA2, WEP
Encryption	AES, TKIP, WEP64
Data speed	Up to 150 Mbps

GPS/GLONASS Interface (Optional)

Number of antennas	1
Connector	SMA-K with 50 ohms impedance
Tracking sensitivity	GPS: greater than -148 dBm GLONASS: greater than -140 dBm
Horizontal position accuracy	GPS: 2.5 m GLONASS: 4.0 m
Protocol	NMEA-0183 V2.3

Serial Interface

Number of ports	1 x RS-232 + 1 x RS-485 or 2 x RS-232 or 2 x RS-485 Optional hardware is 2 x RS-485 or 2 x RS-232
Connector	7-pin 3.5 mm female socket with lock
ESD protection	±15 KV
Baud rate	300bps to 230400bps

DI/DO

Type	2 x DI (dry contact) + 2 x DO (wet contact), 4 x DI, 4 x DO, 3 x DI + 1 x DO or 3 x DO + 1 x DI
Connector	7-pin 3.5 mm female socket with lock
Isolation	3KVDC or 2KVrms
Absolute maximum VDC	"V+" +5V DC (DI), 30V DC (DO)
Absolute maximum ADC	300 mA

Others

Reset button	1 x RST
SD	1 x Micro SD interface
Expansion	1 x USB 2.0 host up to 480 Mbps
LED indicators	1 x RUN, 1 x PPP, 1 x USR, 1 x RSSI, 1 x NET,

Built-in	1 x SIM RTC, Watchdog, Timer
----------	---------------------------------

Software (Basic features of RobustOS)

Network protocols	PPP, PPPoE, TCP, UDP, DHCP, ICMP, NAT, HTTP, HTTPS, DNS, ARP, NTP, SMTP, Telnet, VLAN, SSH2, DDNS, etc.
VPN tunnel	IPsec, OpenVPN, GRE
Firewall	DMZ, anti-DoS, Filtering (IP/Domain name/MAC address), Port Mapping, Access Control
Management	Web, CLI, SMS
Serial port	Transparent, DNP3 Transparent, TCP Client/Server, UDP, Modbus RTU Gateway

App Center (Available Apps for RobustOS)

Apps*	L2TP, PPTP, DMVPN, VRRP, QoS, SNMP, Language, RCMS
-------	--

*Request on demand. For more Apps please visit www.robustel.com.

Power Supply and Consumption

Connector	3-pin 5 mm female socket with lock
Input voltage	9 to 60V DC
Power consumption	Idle: 100 mA@12 V Data link: 400 mA (peak) @12 V

Physical Characteristics

Ingress protection	IP30
Housing & Weight	Metal, 570 g
Dimensions	125 x 104 x 43.5 mm
Installations	Desktop, wall mounting and 35 mm DIN rail mounting

Approvals

Regulatory	CE, NBTC, FCC, RCM, PTCRB, GCF, IC, IMDA, EAC, Anatel, UL, CB, ICASA
Carrier	AT&T, Rogers, Vodafone
Application	C1D2, E-mark (Vehicle), IEC 61000-4-12 (Electromagnetic Compatibility - Oscillatory Waves Immunity Test), RoHS2.0, WEEE
Environmental	EN 55032: 2012/AC: 2013 (CE & RE) Class B
EMI	IEC 61000-4-2 (ESD) Level 4
EMS	IEC 61000-4-3 (RS) Level 4 IEC 61000-4-4 (EFT) Level 4 IEC 61000-4-5 (Surge) Level 3 IEC 61000-4-6 (CS) Level 2 IEC 61000-4-8 (M/S) Level 4

ORDERING INFORMATION

Model	R3000-3P	R3000-4L	R3000-NU
Router Type	HSPA+ Router	LTE Router	Wireline Router
Air Interface	GSM/GPRS/EDGE/HSDPA/HSUPA/HSPA+	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/HSPA+/DC-HSPA+/TD-SCDMA/CDMA (CDMA 1X/EVDO)/FDD LTE/TDD LTE	--
Frequency Bands	--	Global: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28, B38/B39/B40/B41 AU: B1/B2/B3/B4/B5/B7/B8/B28, B40 EMEA: B1/B3/B5/B7/B8/B20, B38/B40/B41 CN: B1/B3/B5/B8, B38/B39/B40/B41	--
4G*			
3G	B1/B2/B4(AWS)/B5/B8/B19	Global: B1/B2/B4/B5/B6/B8/B19, B34/B39 AU: B1/B8 EMEA: B1/B5/B8 CN: B1/B5/B8, B34/B39, BC0	--
2G	B2/B3/B5/B8	CN/EMEA: B3/B8 AU/Global: B2/B3/B5/B8	--
Operating Temperature	-40 to +75 °C	-40 to +75 °C	-40 to +75 °C
Storage Temperature	-40 to +85 °C	-40 to +85 °C	-40 to +85 °C
Relative Humidity	5 to 95% RH	5 to 95% RH	5 to 95% RH

*For more information about 4G frequency bands in different countries, please contact your Robustel sales representative.