
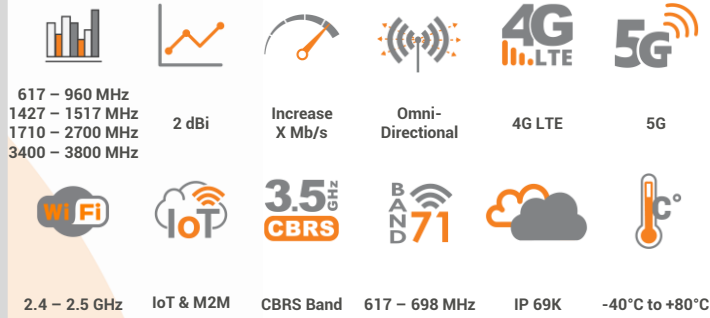


## ANTENNAS | OMNI-404 SERIES

# OMNI-DIRECTIONAL MARINE & COASTAL LTE/5G ANTENNA

617 – 3800 MHz; 2 dBi

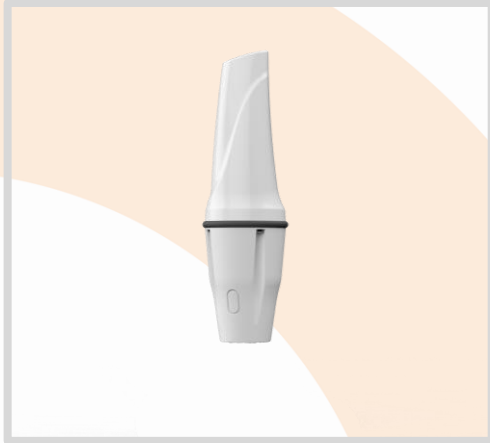

APPLICATION AREAS

- Marine quality, low profile, omni directional antenna
- Suitable for 5G deployments up to 3800 MHz
- Robust and all-weather proof for harsh conditions at sea
- Easy mounting with feed through a standard 1-inch marine adapter bracket which is included
- Various marine grade stainless steel mounting brackets available optionally
- UV and saltwater protected against tempestuous weather conditions
- Protected against water and dust ingress, IP 69K

## Product Overview


The OMNI-404 is a wide band LTE/5G antenna with a smaller profile radome which is specifically designed for adverse marine & coastal environments. This antenna covers all contemporary LTE operating frequencies, from 617 to 3800 MHz, with excellently balanced gain across all frequencies, enhancing LTE performance features, such as multi carrier aggregation (CA). This antenna is also suitable on all 5G networks up to 3800 MHz. The antenna is designed for superior pattern control over the entire frequency range, making the OMNI-404 an exceptional omni-directional antenna for its size and application. Poynting Antennas achieves this through a new antenna design using multiple dipoles and a unique (patented) feed network. A standard 1-inch (14 TPI) marine mount connector is used for simplified installation to most standard marine attachments.

## Features

- Medium gain omni-directional antenna
- The antenna is purpose-built for marine and coastal applications
- Fits directly to standard 1-inch (14 TPI) marine mount
- UV and salt-water resistant
- Robust and weather resistant with IP 69K rating


## Application Areas

- Marine applications / Yachts / Boats / Ferries
- Enhanced LTE Reception
- IoT and M2M
- Poor data signal reception
- Improve data transmission connection reliability & stability

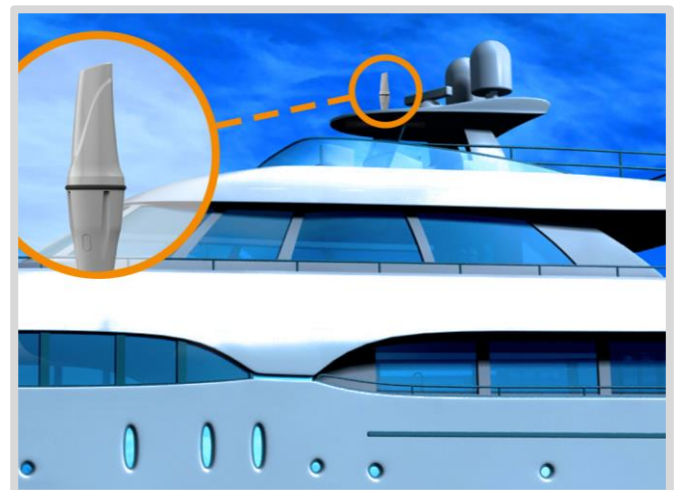

**Frequency Bands**


The OMNI-404 is an omni-directional antenna that works from 617 – 960 MHz | 1427 – 1517 MHz | 1710 – 2700 MHz | and | 3400 – 3800 MHz |

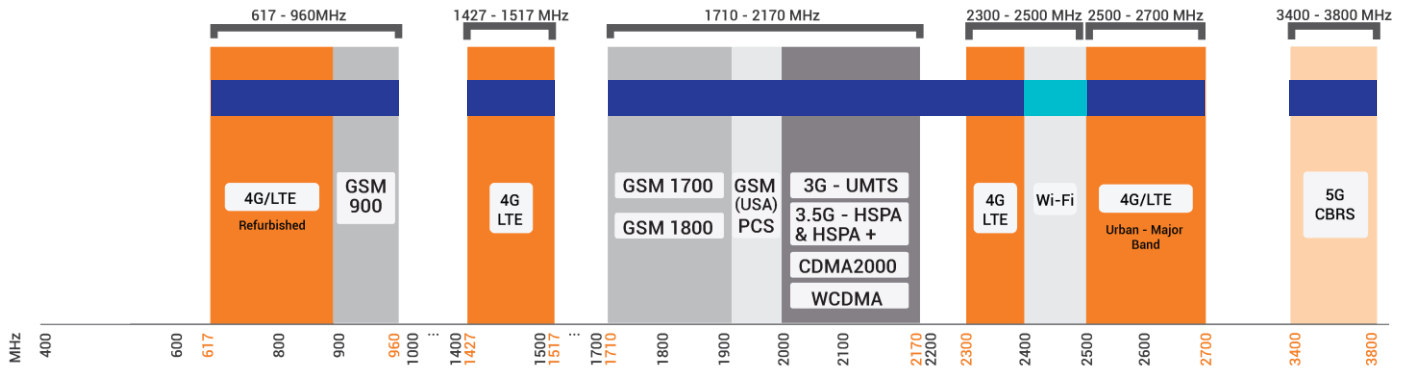

Indicates the 5G/LTE bands on which OMNI-404 works

Indicates the Wi-Fi bands on which OMNI-404 works

**Antenna Overview**

	
Ports	1
SISO / MIMO	SISO
Frequency Bands	617 – 3800 MHz
Polarisation	Linear Vertical
Peak Gain	2 dBi
Coax Cable Type	N/A
Coax Cable Length	N/A
Connector Type	N-Type (F)

*\*The connector is factory mounted to the antenna*

## Electrical Specifications

<b>Frequency Bands:</b>	617 – 960 MHz 1427 – 1517 MHz 1710 – 2700 MHz 3400 – 3800 MHz
<b>Gain (Max):</b>	-4 dBi @ 617 – 960 MHz -1 dBi @ 1427 – 1517 MHz 2 dBi @ 1710 – 2700 MHz 1.5 dBi @ 3400 – 3800 MHz
<b>VSWR:</b>	<2.5:1
<b>Feed Power Handling:</b>	10 W
<b>Input Impedance:</b>	50 Ohm (nominal)
<b>DC Short:</b>	Path to Ground

## Product Box Contents

<b>Antenna:</b>	A-OMNI-0404
<b>Mounting Bracket:</b>	1" (14 TPI) Marine Adapter (BRKT-40)

## Ordering Information

<b>Commercial name:</b>	OMNI-404
<b>Order product code:</b>	A-OMNI-0404-V1-01
<b>EAN number:</b>	6009710920923

## Mechanical Specifications

<b>Product Dimensions:</b>	252 mm x Ø75 mm (Incl. BRKT-40)
<b>Packaged Dimensions:</b>	288 mm x 97 mm x 97 mm
<b>Weight:</b>	0.35 kg
<b>Packaged Weight:</b>	0.50 kg
<b>Radome Material:</b>	UV Stable Marine ASA
<b>Radome Colour:</b>	Brilliant White Pantone P 179-1C
<b>Mounting Type:</b>	Standard 1" -14 TPI Marine Mount


## Environmental Specifications, Certification & Approvals

<b>Wind Survival:</b>	<190 km/h
<b>Temperature Range (Operating):</b>	-40°C to +80°C
<b>Environmental Conditions:</b>	Outdoor/Indoor
<b>Water Ingress Protection Ratio/Standard:</b>	IP 69K
<b>Salt Spray:</b>	MIL-STD 810G/ASTM B117
<b>Operating Relative Humidity:</b>	Up to 98%
<b>Storage Humidity:</b>	5% to 95% - non-condensing
<b>Storage Temperature:</b>	-40°C to +80°C
<b>Enclosure Flammability Rating:</b>	UL 94-HB
<b>Impact Resistance:</b>	IK 10
<b>Product Safety &amp; Environmental:</b>	Complies with CE and RoHS standards




**Antenna Performance Plots**

**VSWR**

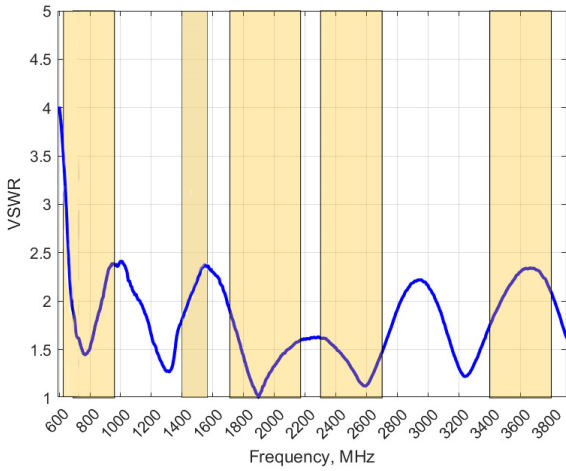

**GAIN (EXCLUDING CABLE LOSS)**

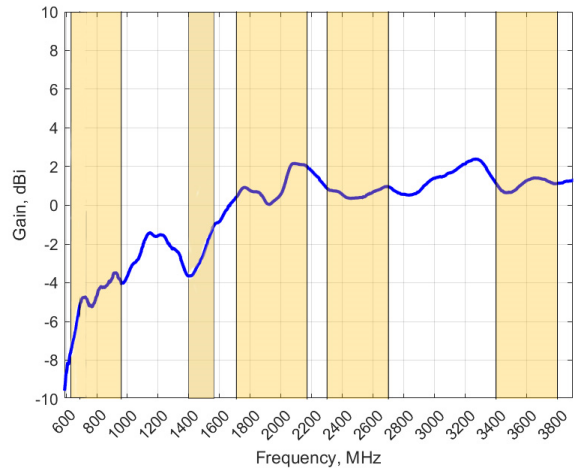

**Voltage Standing Wave Ratio (VSWR)\***

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-404 delivers superior performance across all bands with a VSWR of <2.5:1.

*\*VSWR measured without a cable*

**Gain\* in dBi**


2 dBi is the peak gain across all bands from 617 – 3800 MHz

Gain @ 617 – 960 MHz:	-4 dBi
Gain @ 1427 – 1517 MHz:	-1 dBi
Gain @ 1710 – 2700 MHz:	2 dBi
Gain @ 3400 – 3800 MHz:	1.5 dBi

*\*Antenna gain measured with polarisation aligned standard antenna*


**Technical Drawings**

With standard Marine Mounting and BRKT-39 (not included)

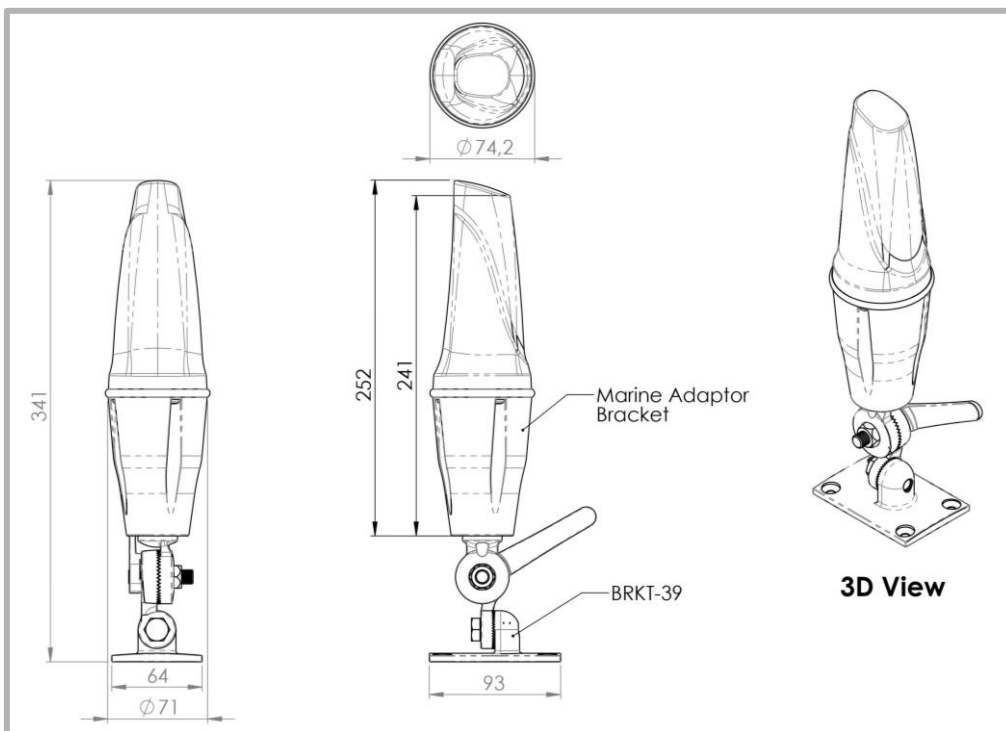


**Radiation Patterns**


**Azimuth: 690 – 960 MHz**

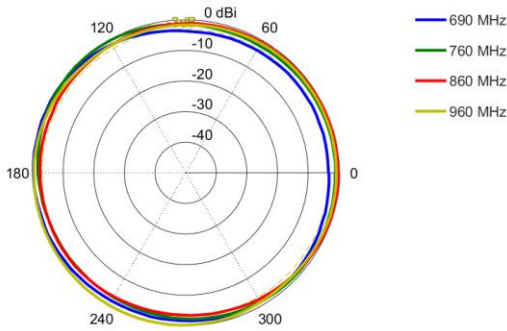


**Azimuth: 1710 – 2170 MHz**

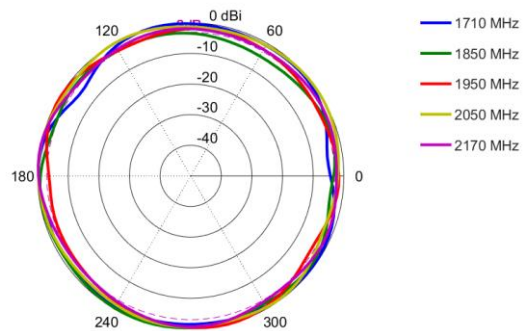


**Azimuth: 2170 – 2700 MHz**

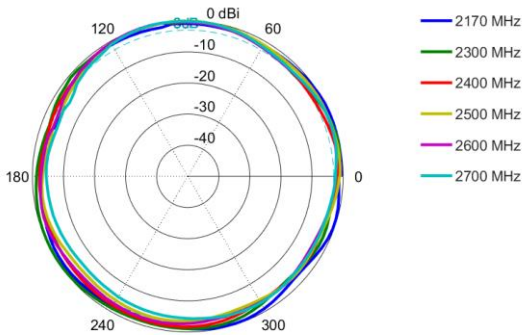


**Azimuth: 3400 – 3800 MHz**

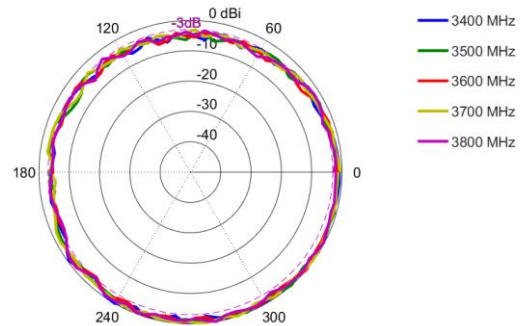


**Elevation: 690 – 960 MHz**

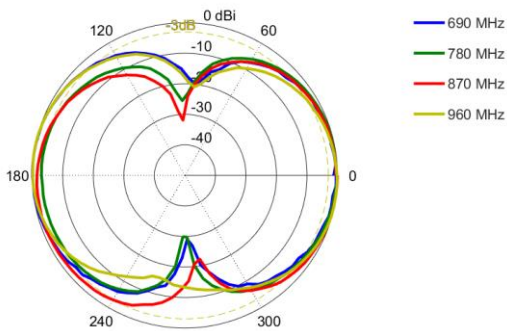


**Elevation: 1710 – 2170 MHz**

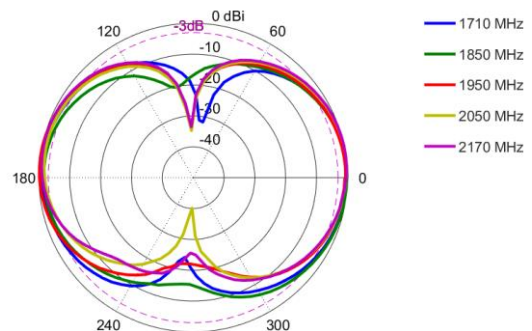


**Elevation: 2170 – 2700 MHz**

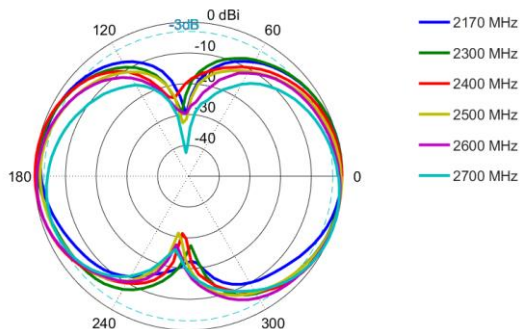

**Elevation: 3400 – 3800 MHz**

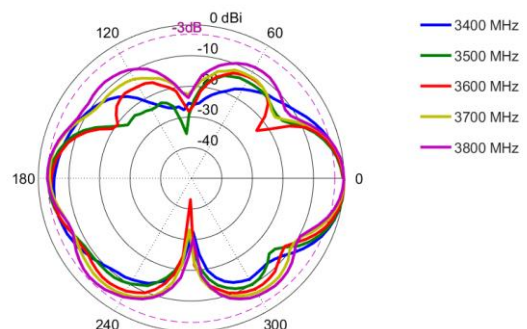

## Mounting Options

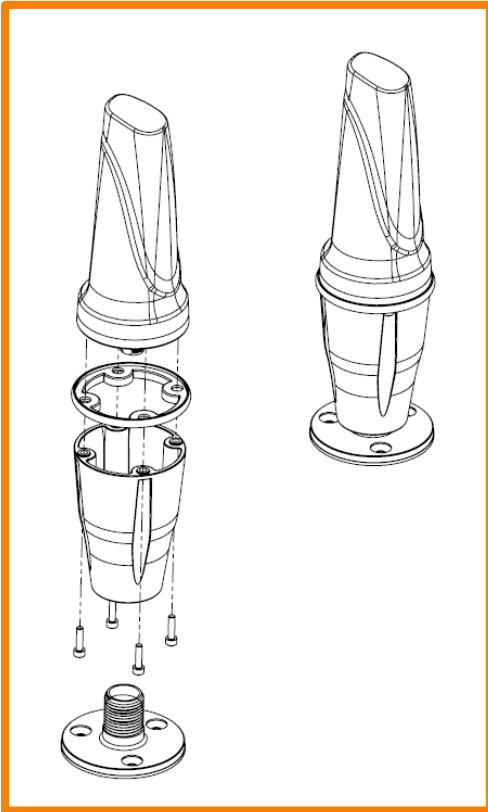

### Marine Bracket Mount

1" -14 TPI female adapter – included

Mounts to standard marine brackets:

- BRKT-37: Flat Mount - Optional
- BRKT-38: Ratchet Mount - Optional
- BRKT-39: Rail Mount - Optional

See Optional Accessories below

Also available: BRKT-41 with 1.25" – 11TPI female adapter (Optional)

## Additional Accessories



### BRKT-37

Marine flat mount antenna bracket 1"-14 TPI 316 Stainless Steel



### BRKT-38

Marine ratchet rail mount antenna bracket 1"-14 TPI 316 Stainless Steel



### BRKT-39

Heavy duty marine mount antenna bracket 1"-14 TPI 316 Stainless Steel

See accessories technical specifications on [www.poynting.tech](http://www.poynting.tech)

## CONTACT POYNTING

### Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,  
Landmarks Avenue,  
Samrand, 0157, South Africa

**Phone:** +27 (0) 12 657 0050

**E-mail:** [info@poynting.tech](mailto:info@poynting.tech)

**International Email:** [sales-global@poynting.tech](mailto:sales-global@poynting.tech)

### Poynting Europe

Regus Business Center Neue Messe Riem  
Kronstadter Straße 4  
81677 München  
Germany

**Phone:** +49 89 7453 9002

**E-mail:** [sales-europe@poynting.tech](mailto:sales-europe@poynting.tech)

### Poynting USA

1804 Owen Court, Suite 104,  
Mansfield,  
TX 76063  
USA

**Phone:** +1 817 533-8130

**E-mail:** [sales-us@poynting.tech](mailto:sales-us@poynting.tech)