


MRF5007-2RS

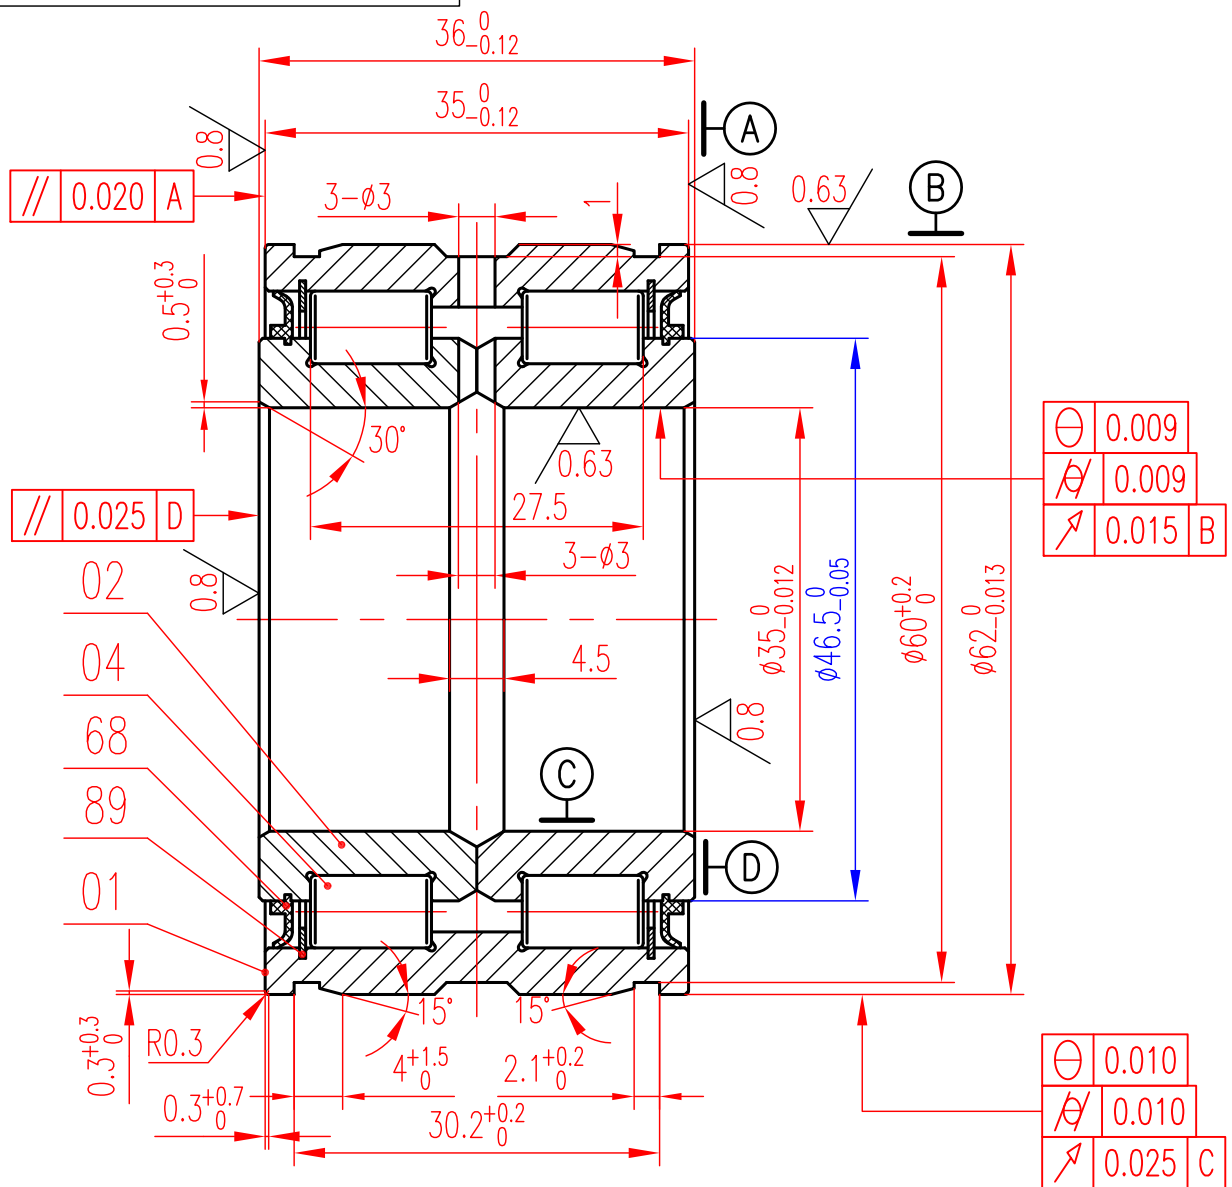

1. RATED LOAD: Cr= 63 KN, Cor= 88 KN;
2. AXIAL INTERNAL CLEARANCE: 0.10 ~ 0.40 ;
3. RADIAL INTERNAL CLEARANCE: 0.025 ~ 0.050 mm ;
4. GREASE: #3 LITHIUM BASE GREASE OR EQUIVALENT;
5. SHAPE LOCATION TOLERANCE SHOULD BE TO CURRENT STANDARD.

68	SEAL RING	2	PU			
89	SNAP RING	2	65Mn-GB/T1222			HRC 42 ~ 48
04	ROLLER $\phi 6 \times 10$	2X25	GCr15-GB/T18254			HRC 60 ~ 64
02	INNER RING	2	GCr15-GB/T18254			HRC 58 ~ 62
01	OUTER RING	1	GCr15-GB/T18254			HRC 58 ~ 62
NO.	NAME	Q'TY	MATERIAL	UNIT	GROSS	ATTENTION
				WEIGHT (kg)	WEIGHT (kg)	
			DOUBLE-ROW CYLINDRICAL ROLLER BEARING	MRF5007-2RS		
				WEIGHT (kg)	SCALE	
				~0.48	TOTALPAGE	
				5	PAGE	
					1	
			XLBearings			
MS	DESIGN	NAME	DATE			
		ZAXIN	2015.10.09			
	CHECK	SHUYAN	2015.10.09			
	CONFIRM	Oven XING	2015.10.09			