

The **STARTPACK PRO 12.24 CI** is a professional autonomous starter for 12 V and 24 V lead batteries (liquid, AGM, EFB, gel...). Thanks to its 2 high-performance internal lead batteries, it develops a high starting current. The booster integrates an intelligent charger that perfectly preserves the health of its 2 batteries. Compact, robust and supplied with a trolley, it is ideal for breakdown services on site and in agricultural workshops, trucks, buses or for construction machinery.

## Very powerful 12 / 24 V booster


Its two high-quality internal batteries (*ENERSYS: 2 x 30 Ah*) give the STARTPACK PRO 12.24 CI a high starting current (*up to 6200 A peak*).

- It starts all vehicles equipped with lead batteries (*liquid, AGM, EFB, gel...*) in a few seconds: 1300 A in 12 V, 1200 A in 24 V.

START	12V		24V	
12 V / 24 V PETROL & DIESEL				

## Built-in automatic charger

- Thanks to its powerful built-in 4 A charger (IUoU curve), the STARTPACK PRO 12.24 CI **can be charged 100% from the mains, quickly and unattended.**
- Its **intelligent 7-step charging curve** extends the life and performance of its internal batteries.

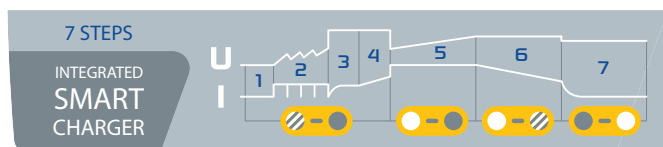

## Perfect for on-site work

Compact, the STARTPACK PRO 12.24 CI has a comfortable power-to-weight ratio. **Delivered with its trolley**, it is easily transportable and adapts perfectly to all types of environments (in the workshop or on site).

## For safe use

This product provides protection for the vehicles on-board electronics, the charger, the battery and the user.

### ✓ Battery switch:

- Protects on-board electronics
- Avoids short circuits.
- Protects against polarity inversion (with audible alarm + indicator light).
- Avoids sparks when connecting the clamps.



### INCLUDED :



Starter clamps  
600 A / 2 m  
50 mm<sup>2</sup>



Trolley  
31 x 55 x 93 cm  
45,5 kg



Recharge after each use -  
When not in use the unit is  
safe to be left on charge 24/7



FLOATING PROCESS



AUTOMATIC CHARGE

START					Charger Inside	Protections		fuse		cm		kg
		1V/C	Cranking CC	Peak Battery								
2 x 30 Ah ENERSYS	12 V	1300 A	2400 A	6200 A	4 A	✓	✓	300 A	2 x 2 m ø50 mm <sup>2</sup>	14 x 35 x 56	34 (STARTPACK only) 45,5 (STARTPACK + trolley)	
	24 V	1200 A	2250 A	3100 A								