

HEAVYPRO



telaio in acciaio verniciato
painted steel frame



porta accessori
built-in accessories holder



serbatoio detergente
integrato
built-in detergent tank



battistrada in
gomma
rubber wheels




Caratteristiche Generali

- Carrello robusto in metallo a due ruote completo di manico
- Pompa a 3 pistoni in ceramica, con sistema biella-manovella
- Valvola di by-pass automatica con azzeramento della pressione nella testa della pompa
- Motore elettrico a induzione monofase con protezione termica
- Regolazione della pressione
- Manometro
- Serbatoio detergente integrato (3 l) con aspirazione regolabile
- Tubo rinforzato con treccia in acciaio (10 m)
- Funzione autoadescante
- Pistola con swivel

General Features

- Heavy-duty two wheeled trolley with handle
- Triplex pump with ceramic pistons and connecting rod system
- Automatic by-pass valve with pressure with pump head pressure discharge
- Single-phase induction motor with thermal protector
- Pressure adjustment
- Pressure gauge
- Built-in detergent tank (3 l) with adjustable detergent injector
- Steel braided hose (10 m)
- Self-priming function
- Gun with swivel

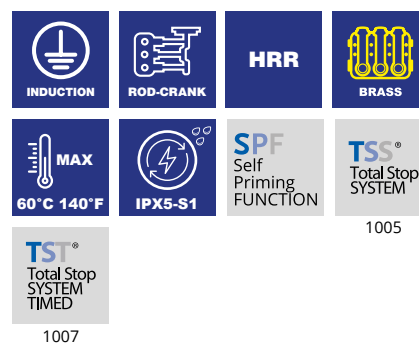

MOD	COD													
		bar max	bar work	psi max	psi work	l/h work	gph work	hp	kW	kW work	rpm	Hz	V	kg
1005	15602	180	150	2610	2175	900	238	6,1	4,5	5	1450	50	400 3~	43
1007	15477-V	230	200	3335	2900	900	238	7,5	5,5	7,4	1450	50	400 3~	54,8
1007 RLW*	15478-V	230	200	3335	2900	900	238	7,5	5,5	7,4	1450	50	400 3~	61,6

Accessori standard / Standard accessories



codice / code	47209	46221 (56 cm)	3961050 (10 m) (1005 - 1007) 3600970 (15 m) (1007 RLW)	3083 (1505) - 1005 3086 (15045) - 1007
entrata inlet	M22x1,5 M 14 mm	M22x1,5 M	M22x1,5 F	1/4 NPT M
uscita outlet	M22x1,5 F	1/4 NPT F	M22x1,5 F	-