



HOT WATER GENERATOR

FIRE BOX

PRESSURE

175÷350
bar

FLOW RATE

1260 l/h

ABSORBED POWER


0,3 kW



EXCLUSIVE CHARACTERISTICS

- ▶ BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

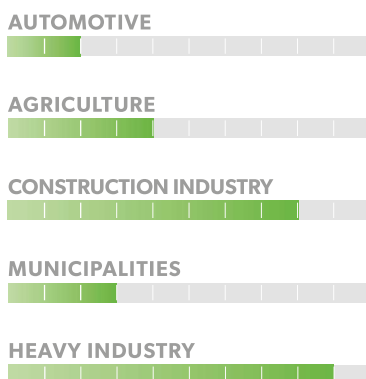

SPECS



SINGLE PHASE BURNER MOTOR CONNECTED TO FAN AND DIESEL FUEL PUMP



COVER AND TROLLEY IN PAINTED SHEET METAL



ELECTRIC CONTROL PANEL WITH ON-OFF SWITCH AND THERMOSTAT

TECHNICAL DATA

Code		30M FIRE BOX	40M FIRE BOX	40/350 FIRE BOX
		CDVE49715	CDVE49716	CDVE40027
PERFORMANCE				
Operating pressure max	bar/Mpa	175/17,5	200/20	350/35
Flow rate	l/h	360-1260	360-1260	360-1260
Outlet water max. temperature	°C	140	140	140
Power supply	Ph-V-Hz/A	1-230-50/2	1-230-50/2	1-230-50/2
Absorbed power	kW	0,3	0,3	0,3
Fuel tank	l	18	18	18
Fuel consumption max	kg/h	5,8	7,2	7,2
Boiler thermal power	kW	70	90	90
Dimension (LxWxH)	cm	79x75x92	120x70x100	120x70x100
Weight	kg	108	111	112

STANDARD EQUIPMENT

CODE: RCIN03755
HOSE COUPLINGS



CODE: TBAP29050
HIGH PRESSURE HOSE
L2310 R2 3/8F - 3/8F

