



YAK 330/S

THE NEW LIFTING PERFORMANCE




Ideal for agricultural and public works vehicles.

Fitted with roll-over protection plate and, on request, pneumatic wheels for working on particularly difficult terrain.

YAK 330/S is specific for lifting the vehicles not only from the chassis but also for all operations where maximum stroke and capacity are required.

TECHNICAL SPECIFICATIONS

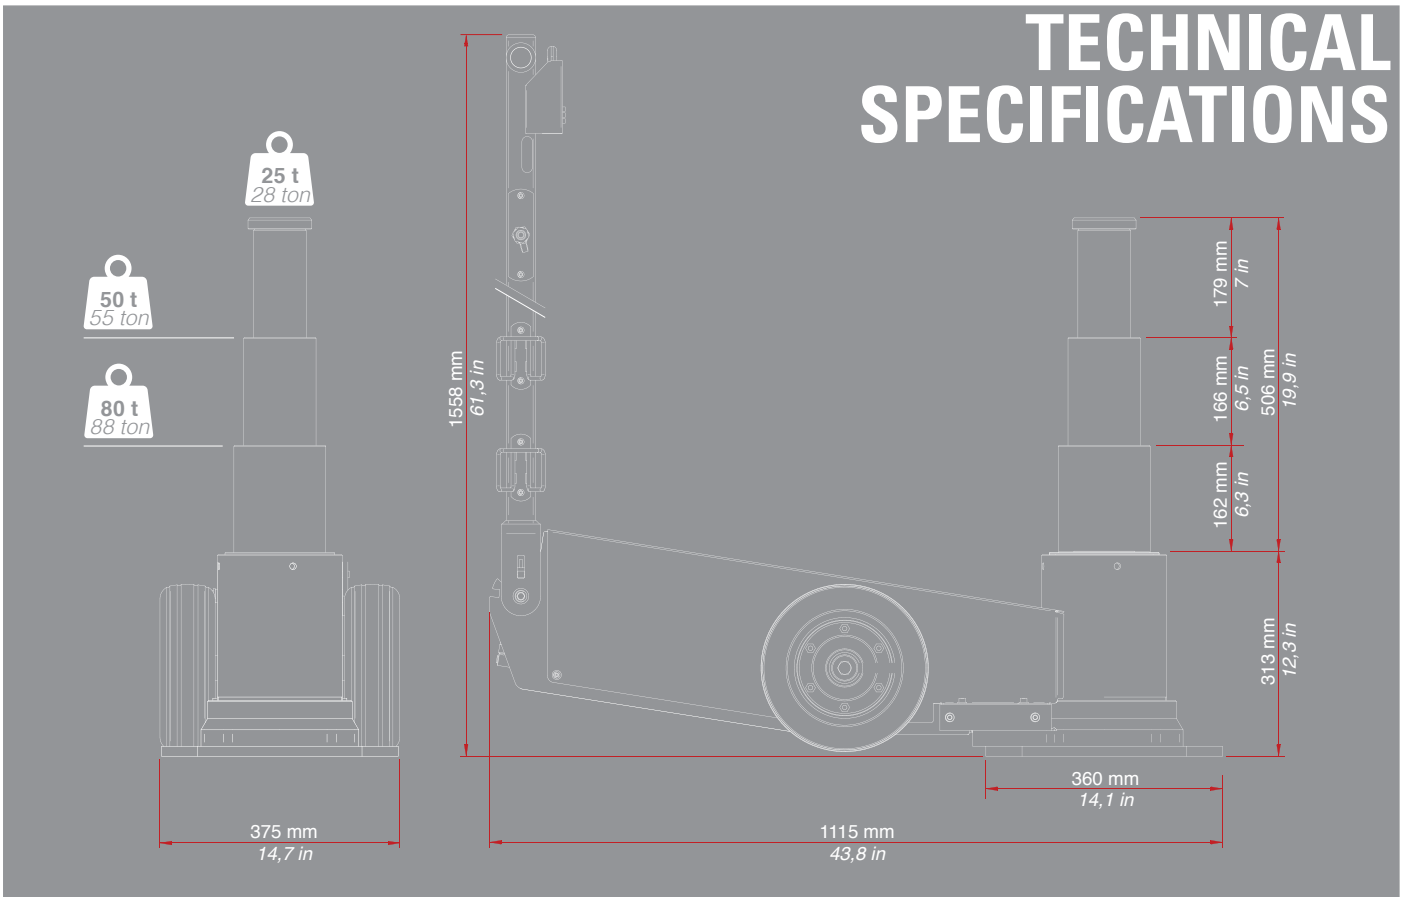

Capacity	80-50-25 t 88-55-28 ton	Working air pressure	8-10 bar 116-145 psi
Net weight	146 kg 322 lb	Air waste	600 NI/min 21,2 scfm

YAK 330/N vs 330/S BENCHMARK

Since its release, YAK 330/N was one of our most successful products: its ability to lift a wide range of special vehicles, combined with its sturdy and compact structure, made it a unique model on the market, but with the YAK 330/S we were able to further improve the performance compared to the previous model.

	YAK330/N	YAK330/S
Total stroke ascent time*	685 s	420 s
Total stroke descent time**	105 s	78 s
Frequency (motor speed)**	8 Hz	16,6 Hz
Air waste	600 NI/min 21,2 scfm	600 NI/min 21,2 scfm

* Data relating to the lifting of 25 t at the supply pressure of 10 bar. ± 10% tolerance on data.

** Data relating to no-load operation at a supply pressure of 10 bar. ± 10% data tolerance

YAK330/S improvements:

■ YAK 330/N ■ YAK 330/S

