



Backbone Knotless Rigging Connector

Nickel plated | Hot forged SAE 4130 steel | Self-chocking
Designed for knotless rigging applications | Ideal for top-down rigging

FEATURES & BENEFITS


- Constructed from hot forged SAE 4130 steel
- Heat treated and hardened for high strength and durability
- Nickel plated finish for corrosion protection
- Eliminates lengthy knot tying
- Vital link in fast paced, secure rigging scenarios
- Improves productivity
- Use to lower multiple limbs at the same time
- Aids in balancing limbs over obstacles
- Compatible with arborist rigging ropes of three strand, double braid, or solid braid in conjunction with Nylon/Dyneema loop runners, lifting slings or other rope slings
- Recommended to use with lowering devices such as Portawrap, GRCS (Good Rigging Control System), Hobbs Device, and alternative rigging bollards




HEAT TREATED
AND HARDENED
FOR STRENGTH

10.75" IN
LENGTH

CHECK OUT
VIDEO ONLINE!

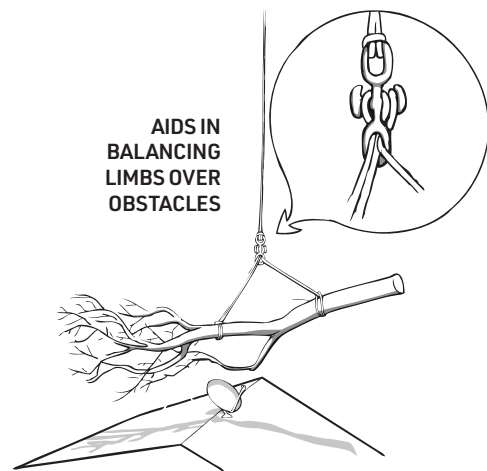

AIDS IN
BALANCING
LIMBS OVER
OBSTACLES

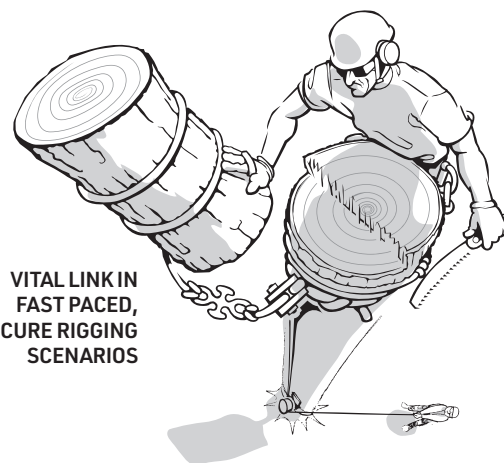

VITAL LINK IN
FAST PACED,
SECURE RIGGING
SCENARIOS

ITEM #	35174
MAX ROPE	3/4 in
TENSILE	46,000 lbs
WLL	4,600 lbs
LENGTH	10.75 in
WIDTH	5.25 in
WEIGHT	3.85 lbs
MSRP	\$56.99
UPC	850120003395



062119NBB