

Ref.2163T **TREE ACCESS EVO**



Ref.2163T TREE ACCESS EVO

TREE CLIMBING

Every feature of the Tree Access Evo has been developed to meet the needs of the most demanding tree climbers. The innovative mobile bridge system is manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability. Two loops on the ends of the bridge create extra points for positioning. The adjustable connections to the waist belt allow the user to fine-tune the height of the bridge in order to optimize the position while hanging.

The waist belt and leg loops are made of ergonomic thermoformed padding to offer broad structural support and are connected by optimally spaced connection straps that give the harness a precise and comfortable fit.

Patented STS automatic buckles on the leg loops. Patented ventral attachment features two loops: the upper loop is for attaching a chest harness and chest ascender and the lower loop for attaching lanyards and rope tools. 2 aluminum alloy side attachment points for positioning and restraint.

Designed for use in combination with the GT Chest (ref.216601), with front and back connection points, to make a full body fall arrest harness.

2 sizes.

2021 UPDATE: connection points for installing the Tree Access SRT Chest for progression; improvements in the comfort of the waist belt.



TREE ACCESS EVO + GT CHEST




Ref.	Product name Nombre del producto	Size Tallas	Weight Peso		Waist Cintura	Legs Perneras	CE		ANSI	EN 361	Attachment points Puntos de anclaje
			g	oz	B (cm)	C (cm)	EN 358	EN 813	Z133:2012		
2163T	TREE ACCESS EVO	S-L	1960	69.2	80-120	50-65	•	•	•	•	
		L-XXL	2030	71.7	90-135	60-75	•	•	•	•	

Ref.2163T **TREE ACCESS EVO**

TREE ACCESS EVO

- ① Aluminium alloy attachment ring, d.45xD.69 mm, 30 kN.
- ② Innovative mobile bridge system is manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability. Two loops on the ends of the bridge create extra points for positioning.
- ③ Webbings and side buckles for bridge position adjustment, perfect to adjust the user's position, also during suspension. 20 mm wide webbings, aluminium alloy buckles.
- ④ Stainless steel connection rings with hexagonal screws for replacements of the rope webbing.
- ⑤ Patented ventral attachment features two loops: the upper loop is for attaching a chest harness and chest ascender and the lower loop for attaching lanyards and rope tools.
- ⑥ New aluminium alloy side rings for work positioning, certified according EN 358.
- ⑦ Connection system between belt and leg-loops: the high distance between the two connection webbings is studied for improved comfort in the groin area.
- ⑧ Patented STS automatic buckles on the leg loops.
- ⑨ New easy-to-adjust buckles made from carbon steel.
- ⑩ Patented "Sicura" buckles for fastening the "Access Swing".
- ⑪ Polyester belt webbings, 44 mm wide.
- ⑫ Polyester leg-loops webbings, 33 mm wide.
- ⑬ Leg-loops webbing reinforcement.
- ⑭ Triple-layer belt padding: comfortable 3D mesh, robust intermediate foam, additional rigid foam layer on load areas. Large contact area for pressure distribution.
- ⑮ Double density leg-loops padding: stiffer on the back for load support, softer on the groin area for comfort. 3D mesh inside. Large contact area for pressure distribution.
- ⑯ Back leg-loops connection webbings adjustable in length with new buckles.
- ⑰ Buckle for "GT Chest" fastening.
- ⑱ Webbing loops for fastening of gear-carabiners "Hub" ref.0910 (supplied separately).
- ⑲ Several rigid gear loops on the belt.
- ⑳ One gear ring on each leg-loop.
- ㉑ Elastic webbing for "First Aid Kit" fastening.
- ㉒ Webbing loop for "Access Swing" fastening when not in use.

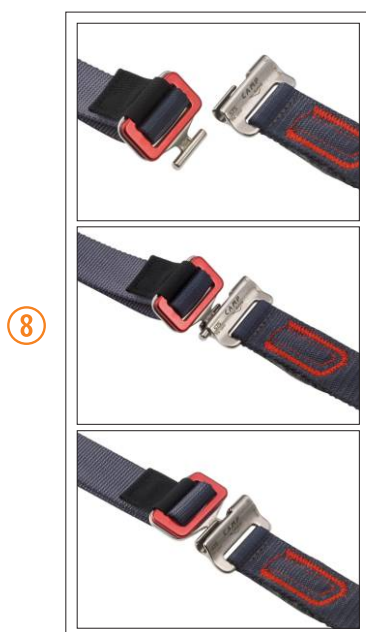

Ref.2163T **TREE ACCESS EVO**

TREE ACCESS EVO + GT CHEST
2163T + 216601

GT CHEST

- ① New fall arrest aluminium alloy rings (front and back) certified according EN 361, suitable for the connection of a shock absorbing lanyard or a fall arrest device.
- ② The structure and padding have been shaped for optimal ergonomics, especially on the neck.
- ③ Triple-layer padding: comfortable 3D mesh, robust intermediate foam, external protective mesh.
- ④ Polyester webbings, 44 mm wide.
- ⑤ New carbon steel buckles for fast adjustment.
- ⑥ Patented "HMS Belay Lock" ref.1176 connector, equipped with anti-rotation lever. Detachable. Made of aluminium alloy. To be connected to the sit harness "Tree Access Evo".
- ⑦ Back connection system to "Tree Access Evo".
- ⑧ Webbing system for chest ascender fastening.



Ref.	Product name Nombre del producto	Size Tallas	Weight Peso		Height Altura	CE	EN 361	EN 361	Attachment points Puntos de anclaje
			g	oz	D (cm)				
216601	GT CHEST	S-L	610	21.5	55-75	.	.	.	
		L-XXL	650	22.9	65-85				

Ref.2163T TREE ACCESS EVO

“TREE ACCESS EVO” SPARE PARTS

Access Ring

- 2046 34 mm
- 204601 45 mm

Aluminum alloy connection ring that is useful for the connection of various fall arrest components and can be inserted into the mobile bridge system of the Tree Access series harnesses. Available in two color-coded sizes with different diameters.

2021 UPDATE: ANSI Z359.12 certification (ref.204601).

ROPE ACCESS TREE CLIMBING



Ref.	Product name Nombre del producto	Weight Peso		Diameter Diámetro	Strength Resistencia	CE	ANSI
		g	oz				
2046	ACCESS RING 34 mm	34	1.2	Int. 34 - Ext. 54	24	•	Z359.12
204601	ACCESS RING 45 mm	59	2.1	Int. 45 - Ext. 69	30	•	•

Tree Access Evo/ANSI Bridge with Side Loops

- 216403 32 cm
- 216404 37 cm
- 216405 42 cm

Mobile attachment bridge for the Tree Access Evo, Tree Access ANSI ST and XT harnesses.

Equipped with side attachment loops for positioning.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in three lengths: 32 cm, 37 cm and 42 cm.

TREE CLIMBING



Ref.	Weight Peso	
	g	oz
216403 - 32 cm	65	2.3
216404 - 37 cm	70	2.5
216405 - 42 cm	75	2.6

Tree Access Evo/ANSI Bridge with Side Loops + Gyro

- 216406 32 cm
- 216407 37 cm
- 216408 42 cm

Mobile attachment bridge equipped with the patented Gyro triple swiveling device for maximum freedom of movement. Equipped with side attachment loops for positioning.

Compatible with the Tree Access Evo, Tree Access ANSI ST and XT harnesses.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in three lengths: 32 cm, 37 cm and 42 cm.

TREE CLIMBING



Ref.	Weight Peso	
	g	oz
216406 - 32 cm	225	7.9
216407 - 37 cm	230	8.1
216408 - 42 cm	235	8.3

Tree Access Webbing Bridge

- 216401 25 cm
- 216402 30 cm

Webbing replacement mobile attachment bridge. Compatible with the Tree Access Evo and TreeAccess harnesses.

Available in two lengths: 25 cm and 30 cm.

TREE CLIMBING



Ref.	Weight Peso	
	g	oz
216401 - 25 cm	30	1.1
216402 - 30 cm	35	1.2