




front

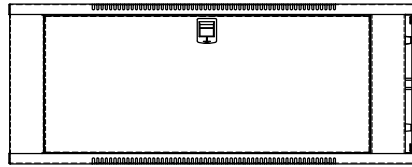


side

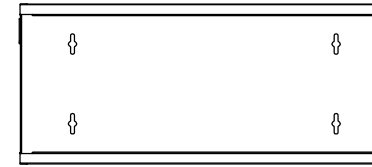

back

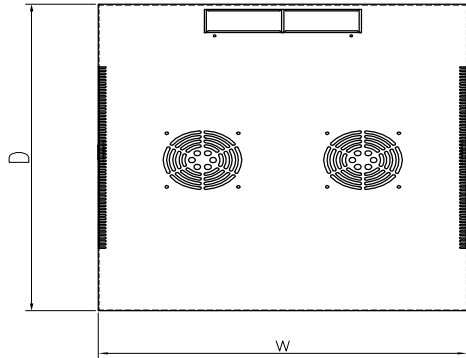

top

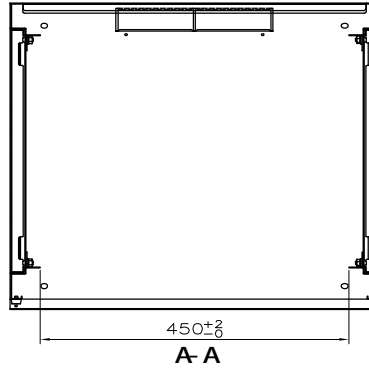

A-A

Model No.	Capacity(U)	Width (mm)	Depth (mm)	Height (mm)
19-5406	6	540	450	314
19-5409	9	540	450	447
19-5412	12	540	450	580

**Standard:**

Comply with ANSI/EIA  
RS-310-D IEC60297-2 DIN41494;PART1!  
DIN41494;PART7

**Material:**

SPCC Cold Rolled Steel!  
Thickness: 19" rails" 1.2/1.5mm, others: 1.2mm

**Loading capacity:**


Static loading: 50KG

**Surface treatment:**

Degreasing, cleaning, passivation,  
classic plastic spraying

**Feature:**

- # **The overall welding framework, 30 kg static load;**
- # Walking up and down at the back of the two knock off type line hole;
- # No frame tawny toughened glass front door, the door open direction can use either exchange, door opening Angle is greater than 180 degrees;
- # Quick opening side door, convenient installation of equipment maintenance;
- # Hanging, be born two installation ways;
- # Before and after the Angle gauge installation depth can be adjusted according to need

				NO.	PARTS NAME	Q'TY	SPECIFICATION			
APPROVED	CHECKED	DRAWN	CUSTOMER:	DESCRIPTION: 19" wall box						
			ITEM NO.						19-5406 / 5409/ 5412	
			DRAW NO.							
			UNIT						mm	
			SCALE	NONE						