

VERSA USB HUB



Provides single-USB connections in various workspaces for simple, ergonomic connection of peripheral devices to PC or laptops.

Home Office Solution

Dramatically enhances the audio and video experience for any cloud-based video collaboration application for your professional home office














Highlights

- + Use with Versa Pro, Xceed BMA, or Xceed BMA Room solutions to easily connect the BMA CTH, cameras, and display options to your room PC or laptop with a single USB cable.
- Use with Versa and Versa Pro solutions to combine mic and camera options and allow easy BYOD with a single USB connection to your room PC or laptop.
- + USB 3.0 or USB 2.0 compatibility, with 4 USB 2.0 ports (with one port for smartphone charging function) and 2 USB 3.0 ports.
- + Supports resolution up to 2048 x 1152.

- + Primary / Extend / Mirror Video Modes.
- + Supports DVI-I / HDMI / VGA, with built-in USB 3.0 Gigabit Ethernet adapter and Audio Mic in and Line Out.
- + Compatible with popular applications such as COLLABORATE® Space, Microsoft® Teams, WebEx™, Zoom™, Google® Meet™, and more.
- + FREE COLLABORATE® Space lifetime subscription ClearOne's high quality, award-winning cloud-based video collaboration application.

Aura Professional Home Office Application

Complete your Versa USB Hub setup by adding other ClearOne Aura products

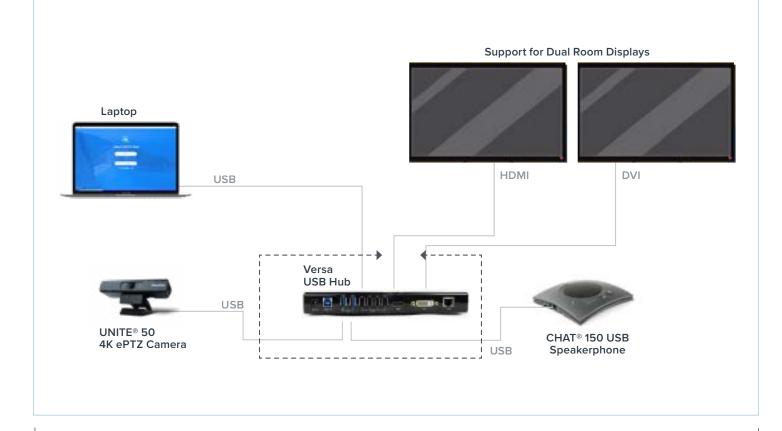



Specifications

+ AUR-3001-100 Versa USB Hub

SYSTEM REQUIREMENTS

- + 2.0 GHz Core2 Duo or better, 1GB RAM
- + Full-Screen Video Playback: Core i3, i5 or i7 2+GHz, 4GB RAM
- + Operating System: Windows Vista/7/8/8.1/10, Mac OS 10.2 or above
- + Max Resolution: 2048 x 1152

HARDWARE

- + Ports:
- 1x USB 3.0 (Type-B) for laptop (Requires Display Link driver on laptop)
- 2x USB 3.0 (Type-A) for UNITE camera & CHAT Speakerphone
- 4x USB 2.0 ports
- 1x HDMI out
- 1x DVI out
- + Button: NIL
- + LED: Blue
- + Chipset: DL3900, VL82B2, FE 1.1S
- + Flash: 8 MB
- + SDRAM: DDR3 1 GB

POWER & THERMAL

- + Power Supply: 12 V 2 A
- + Power Plug: UK/EU/US/China/Australia (option)
- + Power Consumption: 1 W
- + Rated Voltage/Frequency/Current: 100-240 Va.c. 50/60 Hz, 0.1 A max, CLASS II

ENVIRONMENTAL

- + Operating Temperature: 32° F 104° F (0° C 40° C) ambient temperature
- + Storage Temperature: 14° F 158° F (-10° C 70° C) ambient temperature
- + Relative Humidity: 10%~90%, non-condensing
- + Cycle work (hours): 24 hours

MECHANICAL

- + Dimensions: (H x W x D) 8.82 x 3.43 x 1.26" (224 x 87 x 32 mm)
- + Net Weight: 0.55 lb (2.5 kg)
- + Housing: ABS
- + Color: Black

Sales & Inquiries _

Headquarters

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116 Headquarters

US: +1.801.975.7200 International: +1.801.975.7200 Aura Sales

US: +1.888.HEY.AURA International: +1.801.975.7200 aurasales@clearone.com Aura Tech Support

US: +1.888.HEY.AURA International: +1.801.975.7200 auratechsupport@clearone.com