

The **STARTPACK 12.24 CI** is a professional, autonomous starter for 12 V and 24 V lead batteries (liquid, AGM, EFB and gel). Thanks to its own two high-performance, internal, lead batteries, it is capable of generating a high starting current. This booster integrates a smart charger that perfectly preserves the condition of its two built-in batteries. Compact and robust, this device is ideal for on-site repairs or in automotive and agricultural workshops (for cars and vans).

Very powerful 12 / 24 V booster


Its two high-quality internal batteries (*ENERSYS: 2 x 16 Ah*) give the STARTPACK 12.24 CI a high starting current (*with a peak of 3,600 A*).

It can start all vehicles equipped with lead batteries (*liquid, AGM, EFB and gel*) in just a few seconds (900 A in 12 V, 700 A in 24 V).

START	VEHICLE TYPES										
12 V / 24 V											
PETROL & DIESEL	12 V					24 V					

Built-in automatic charger

- Thanks to its powerful, built-in, 4 A charger (IUoU curve), the STARTPACK 12.24 CI can be fully and quickly charged from the mains system as well as being suitable to be left unattended.
- Its **smart, seven-stage charging curve** extends the life span and performance of its internal batteries.

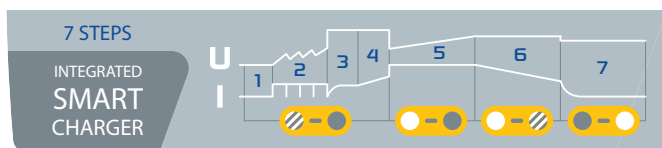

Perfect for on-site work

The compact STARTPACK 12.24 CI has a comfortable power-to-weight ratio. More robust and **equipped with an ergonomic handle**, it is perfectly adapted to demanding environments (in workshops or on site).






For safe use



This product provides protection for the vehicles on-board electronics, the charger, the battery and the user.

✓ OFF position :

- preserves the on-board electronics.
- avoids short circuits and overloads.
- protects against polarity inversion (with audible alarm + indicator light).
- avoids sparks when connecting the clamps.



	INCLUDED : Starter clamps 600 A / 1.8 m 35 mm ²
 Recharge after each use - When not in use the unit is safe to be left on charge 24/7	 16 Ah + 16 Ah INSIDE
 CHARGE 100%	 INSIDE AUTOMATIC CHARGE
FLOATING PROCESS	

INSIDE 12V	START				Charger Inside	Protections		fuse	cm	kg	
	Battery	1V/C	Cranking CC	Peak Battery							
2 x 16 Ah ENERSYS	12 V	900 A	1700 A	3600 A	4 A	✓	✓	300 A	2 x 1.8 m ø35 mm ²	26 x 20 x 48	19
	24 V	700 A	1350 A	1800 A							