


# SPRINTA

## UNIVERSAL SINGLE-SIDED TAPE WITHOUT RELEASE LINER

- It can be applied both indoors and outdoors, providing fast and secure sealing
- No separation film means less waste to dispose of, for greater environmental sustainability
- It can be easily torn off thanks to the serrated edges that facilitate cutting the tape without the use of scissors or cutters
- Speed and good adhesion strength on most common building materials

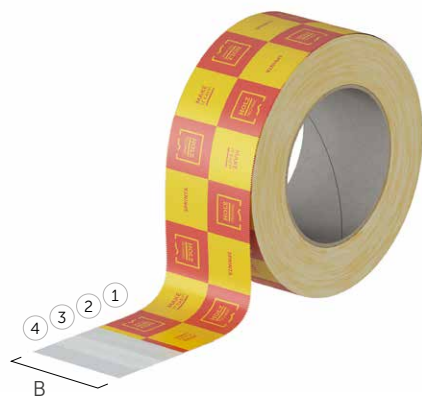

CODE	liner [mm]	B [mm]	L [m]	pcs
SPRINTA60	/	60	25	10

Thickness: 0,34 mm

### COMPOSITION

- 1 support: PE film
- 2 glue: solvent-free UV-crosslinked acrylic
- 3 reinforcing layer: polyester reinforcing grid
- 4 glue: solvent-free UV-crosslinked acrylic

### TECHNICAL DATA

properties	standard	value
thickness	AFERA 5006	0,245 mm
adhesion on steel	AFERA 5001	≥ 25 N/25 mm
adhesion on polyethylene	EN 12316-2	≥ 12,5 N/25 mm
tear strength	EN 12317-2	≥ 90 N/50 mm
water vapour transmission (Sd)	EN 1931	40 m
UV resistance	-	6 months
watertightness	-	conforming
application temperature	-	-10 / +30 °C
thermal resistance	-	-40 / +80 °C
storage temperature <sup>(1)</sup>	-	+5 / +30 °C
solvents	-	no
French VOC classification	ISO 16000	A+

<sup>(1)</sup>Store the product in a dry, covered location.

