

10

9

8

7

6

5

4



3

2

1

REAR VIEW

FRONT VIEW

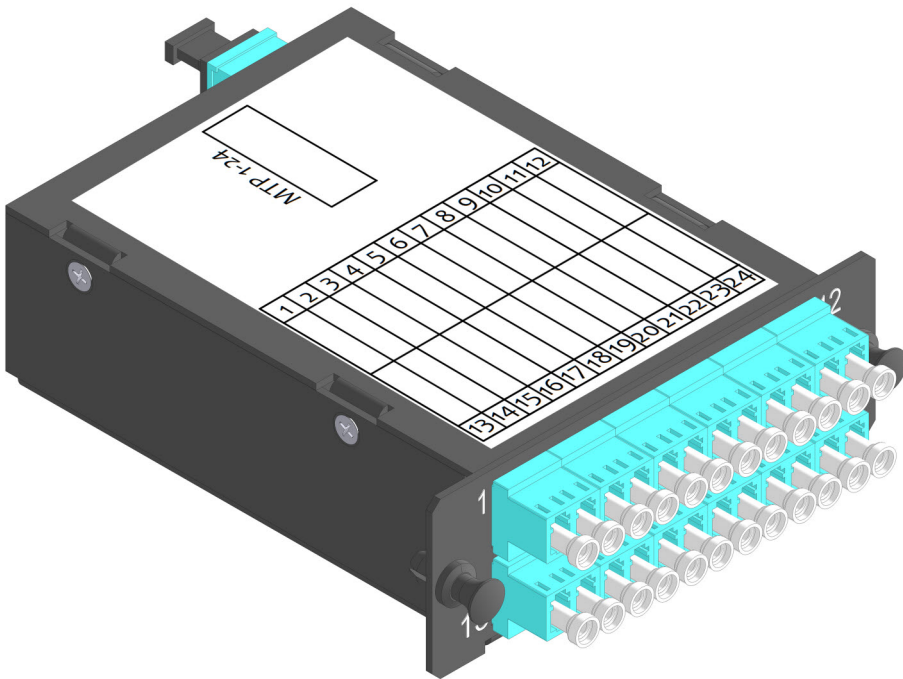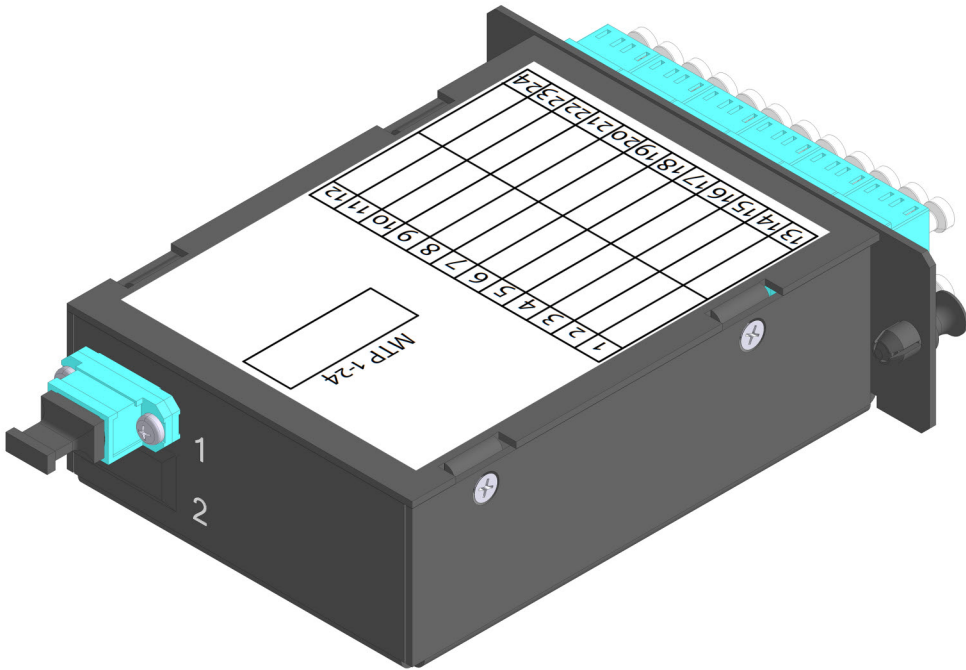

ADAPTERS COLOUR

MODE	MTP	LCD
OS2	GREEN	BLUE
OS2-APC	GREEN	GREEN
OM3	AQUA	AQUA
OM4	MAGENTA	MAGENTA
OM5	LIME	LIME

ORDERING CODE

M24X-XX2-BXS

- L Standard polarity, B polarity B
- G MTP female, N MTP male (direct split)
- L LC/PC, A LC/APC (direct split)
- 9 OS2, 3 OM3, 4 OM4, 5 OM5
- M MTP PANEL SYSTEM

NOTES:

- 1 - OM3, OM4: IL<0.6dB AT 850nm AND 1300nm - CHANNEL VALUE ACCORDING IEC 61280-4-1 ONE-CORD REFERENCE METHOD
RL>19.6dB AT 850nm AND 1300nm - CHANNEL GUARANTEED VALUE
OS2: IL<0.75dB (MTP 10N spring) AT 1310nm AND 1550nm - CHANNEL VALUE ACCORDING IEC 61280-4-1 ONE-CORD REFERENCE METH.
IL<0.6dB (MTP 20N spring) AT 1310nm AND 1550nm - CHANNEL VALUE ACCORDING IEC 61280-4-1 ONE-CORD REFERENCE METH.
RL>47B (UPC) AT 1310nm AND 1550nm - CHANNEL GUARANTEED VALUE
RL>49.6B (APC) AT 1310nm AND 1550nm - CHANNEL GUARANTEED VALUE
VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)
END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)
- 2 - LABEL ON PRODUCT PACKAGING AND MASTER CARDBOARD BOX
- 3 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM

REVISION-DATE: A - 28.05.2014	CHANGE:	DRAWN BY, DATE: J.Špilár 2014/05/28	TITLE: 1x24f MTP to 12xLC DUPLEX MODULE		
- created a new drawing		CHECKED BY, DATE: E.Koza 2014/05/29			
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	APPROVED BY, DATE: I.Golian 2014/05/29	PRODUCT SPECIFICATION: ID 1133	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
XXX					
REVISION-DATE: X - DD.MM.YYYY	CHANGE:		PRODUCT NUMBER:	DRAWING NUMBER: 1-S-2953_1_A	SHEET NO. 1 of 1
XXX		A	F-rack		SIZE A3