


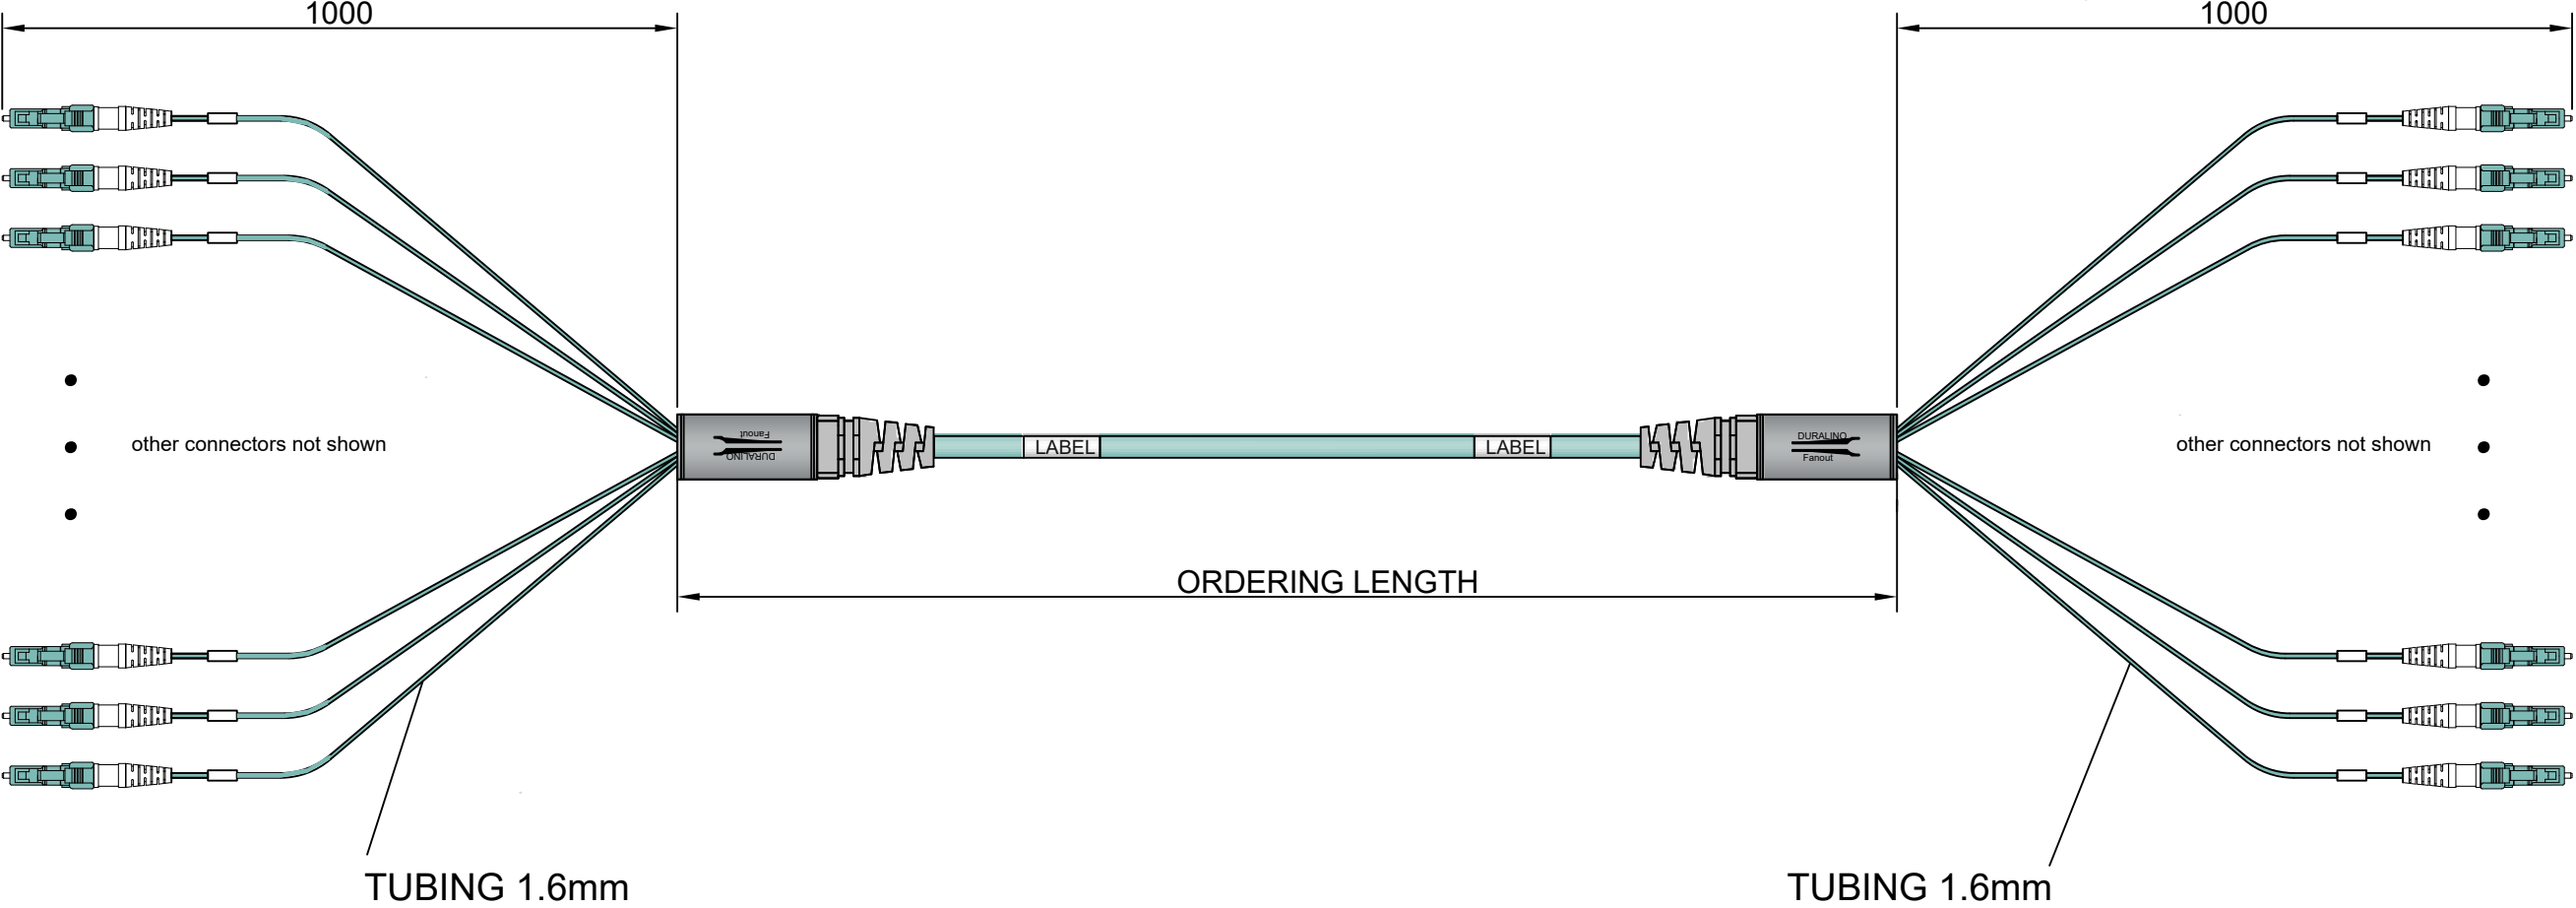

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326

ORDERING CODE

X

A

A

X

-

X

X

S

-

xxx

xxx

 cable length [050 = 50m, 001 = 1m]

S

 2.0mm simplex tubing

AA

 LC/APC-LC/APC,

LL

 LC/PC-LC/PC *

9

 OS2,

3

 OM3,

4

 OM4,

5

 OM5

AA

 144F

T

 trunk,

G

 trunk with grommet **

* OTHER CONNECTOR TYPES ON REQUEST

** SHOWN TRUNK VERSION WITH GROMMET [G]

REVISION-DATE: A - 26.06.2019	CHANGE:	DRAWN BY, DATE: P. Gašpár 2019/06/26	TITLE: 144f LC-LC Duralino Trunk		
New drawing		CHECKED BY, DATE: Pavlov/Matúš 2019/06/26			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská 2019/06/26	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: XAAX-XXS-xxx	DRAWING NUMBER: 1-S-7154_1_A		SHEET NO. 1 of 1
		A	SIZE A3		