

F

E

D

C



B

A

8
X

1
2

F
I
B
E
R
S

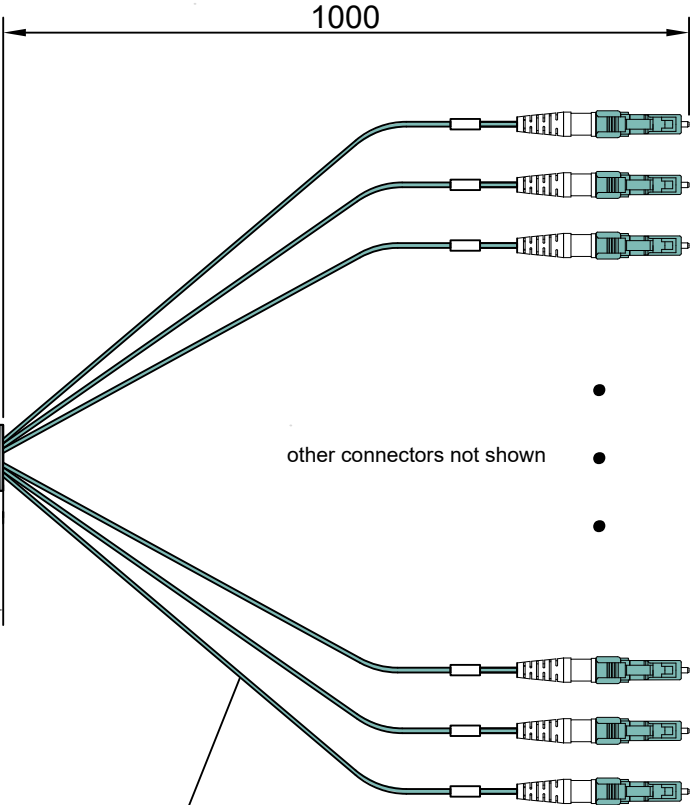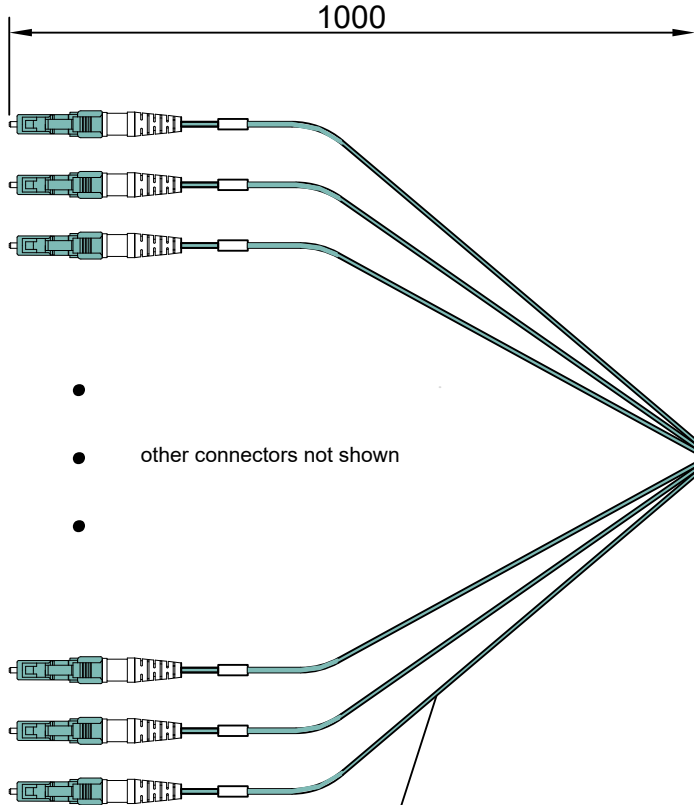

8
X

1
2

F
I
B
E
R
S

F

E

D

C

B

A

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326

ORDERING CODE

X96X-XXS-xxx

- xxx** cable length [050 = 50m, 001 = 1m]
- S** 2.0mm simplex tubing
- AA** LC/APC-LC/APC, **LL** LC/PC-LC/PC *
- 9** OS2, **3** OM3, **4** OM4, **5** OM5
- 96** 96F
- T** trunk, **G** trunk with grommet **

* OTHER CONNECTOR TYPES ON REQUEST
** SHOWN TRUNK VERSION WITH GROMMET [G]

REVISION-DATE: A - 26.06.2019	CHANGE:	DRAWN BY, DATE: P. Gašpár 2019/06/26	TITLE: 96f LC-LC Duralino Trunk		
New drawing		CHECKED BY, DATE: Pavlov/Matúš 2019/06/26			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská 2019/06/26	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: X96X-XXS-xxx	DRAWING NUMBER: 1-S-7153_1_A		SHEET NO. 1 of 1
		A	SIZE A3		