


MDC - MDC 2-fiber Duplex patch cord

Basic characteristics

- Constructed of high-quality fiber optic cable and components
- Two fibers connection for SFP-DD and QSFP-DD
- With push-pull boot for easy insertion/extraction
- Very small form factor duplex connector

Applications

- Data center
- Storage Area Network

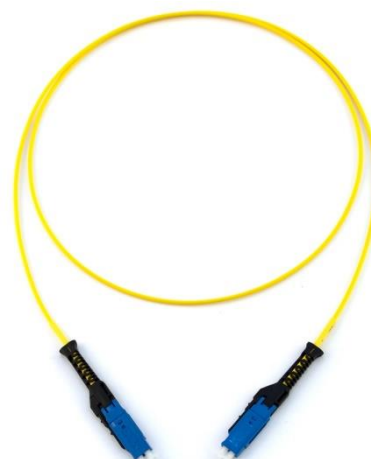

Temperature range

Indoor controlled environment (-10°C/+60°C)

Cable parameters

Jacket material		LSZH
Cable construction		Round single jacket cable
Outer diameter		1.85mm
Fiber count		2
Fiber type		SMF OS2 MMF OM3/OM4/
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

	MDC Sr. SM/MM
Compliance	Telcordia GR-326
Color of housing	Blue (UPC)/Green(APC) Aqua / Magenta / Lime Green
Color of boot	Black
Polish	Flat SM (UPC) / Angled (APC) Flat MM (PC)
Insertion Loss (acc. IEC 61300-3-4 method B)	<0,25dB (@1310/1550nm/@850/1300nm)
Return Loss (acc. IEC 61300-3-6)	>50dB(UPC)/>65dB(APC)/ >20dB (@1310/1550nm/@850/1300nm)

Identification

Traceability label with unique serial number on both ends of cable assembly.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.

*Specifications are subject to change without notice

*Cable with PVC outer jacketed material available on demand

För mer information kontakta oss på info@fracksystems.se