


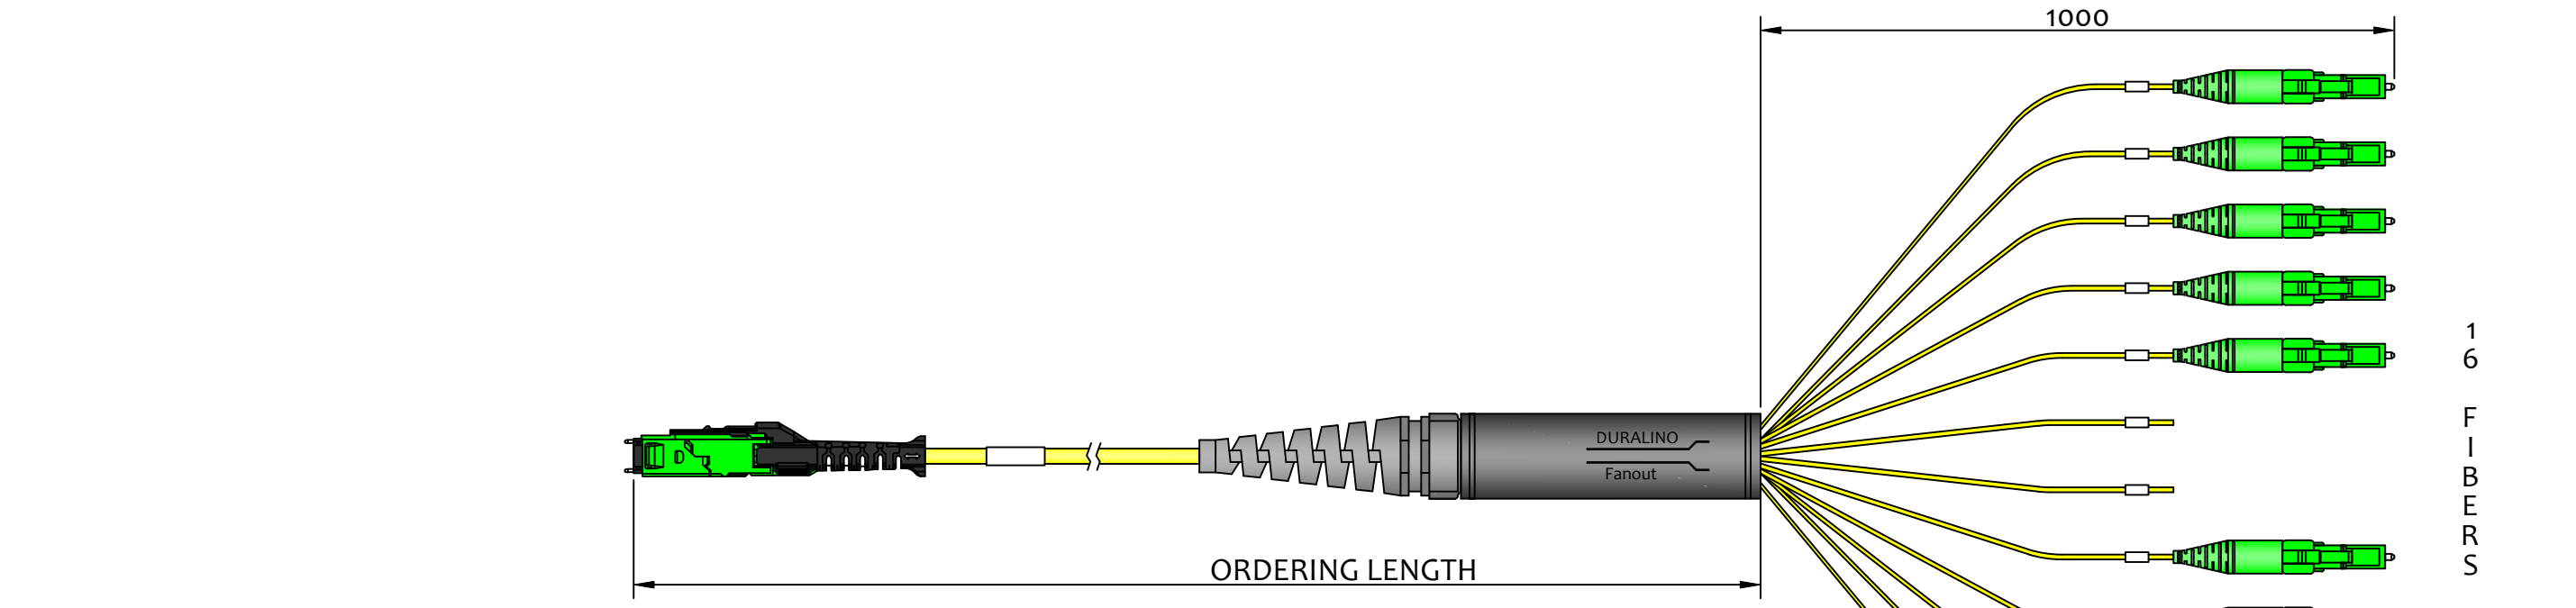

- NOTES :
- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
 - 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
 - 3 - LC: OM3, OM4 - IL<0.25dB , RL>30dB , 850nm & 1300nm
LC: OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm
MMC: OM3, OM4 - IL<0.35dB , RL>20dB , 850nm & 1300nm
MMC: OS2 - IL<0.35dB, RL>60dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
 - 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector)
 - 5 - LC CONNECTORS BUNDLED AND WRAPPED IN BUBBLE FOIL SLEEVE
 - 6 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG, BULKPACKINOUTERCARDBOARDBOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL, INSERTED IN CARDBOARD BOX

ORDERING CODE

V16X-XXX-xxx

xxx cable length [050 = 50m, 001 = 1m]

S - 2.0mm TUBING

C LC/PC , D LC/APC *

A MMC/APC Female 16F, B MMC/APC Male 16F

9 OS2, 3 OM3, 4 OM4

16 16F

V MMC fanout, K MMC fanout with grommet **

* OTHER CONNECTOR TYPES ON REQUEST
** SHOWN FANOUT VERSION WITH GROMMET [K]

REVISION-DATE: A - 07.03.2024	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 07.03.2024	TITLE: 16f 1xMMC-LC Duralino fanout – simplex		
New drawing		CHECKED BY, DATE: M.Bombarova			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT SPECIFICATION: QPN - 000	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: XXXX-XXX-xxx	DRAWING NUMBER: 1-W-9947_2_A	SHEET NO. 2 of 2	
A			F-rack SIZE A3		