


MTP PRO connector optional

CONNECTION TABLE			
MTP(F) 24F CONNECTOR	MTP(F) 12F CONNECTOR		
MTP - CXP/CFP	QSFP 1	QSFP 2	QSFP 3
1	12		
2	11		
3	10		
4	9		
5		12	
6		11	
7		10	
8		9	
9			12
10			11
11			10
12			9

CONNECTION TABLE			
MTP(F) 24F CONNECTOR	MTP(F) 12F CONNECTOR		
MTP - CXP/CFP	QSFP 1	QSFP 2	QSFP 3
13	1		
14	2		
15	3		
16	4		
17		1	
18		2	
19		3	
20		4	
21			1
22			2
23			3
24			4

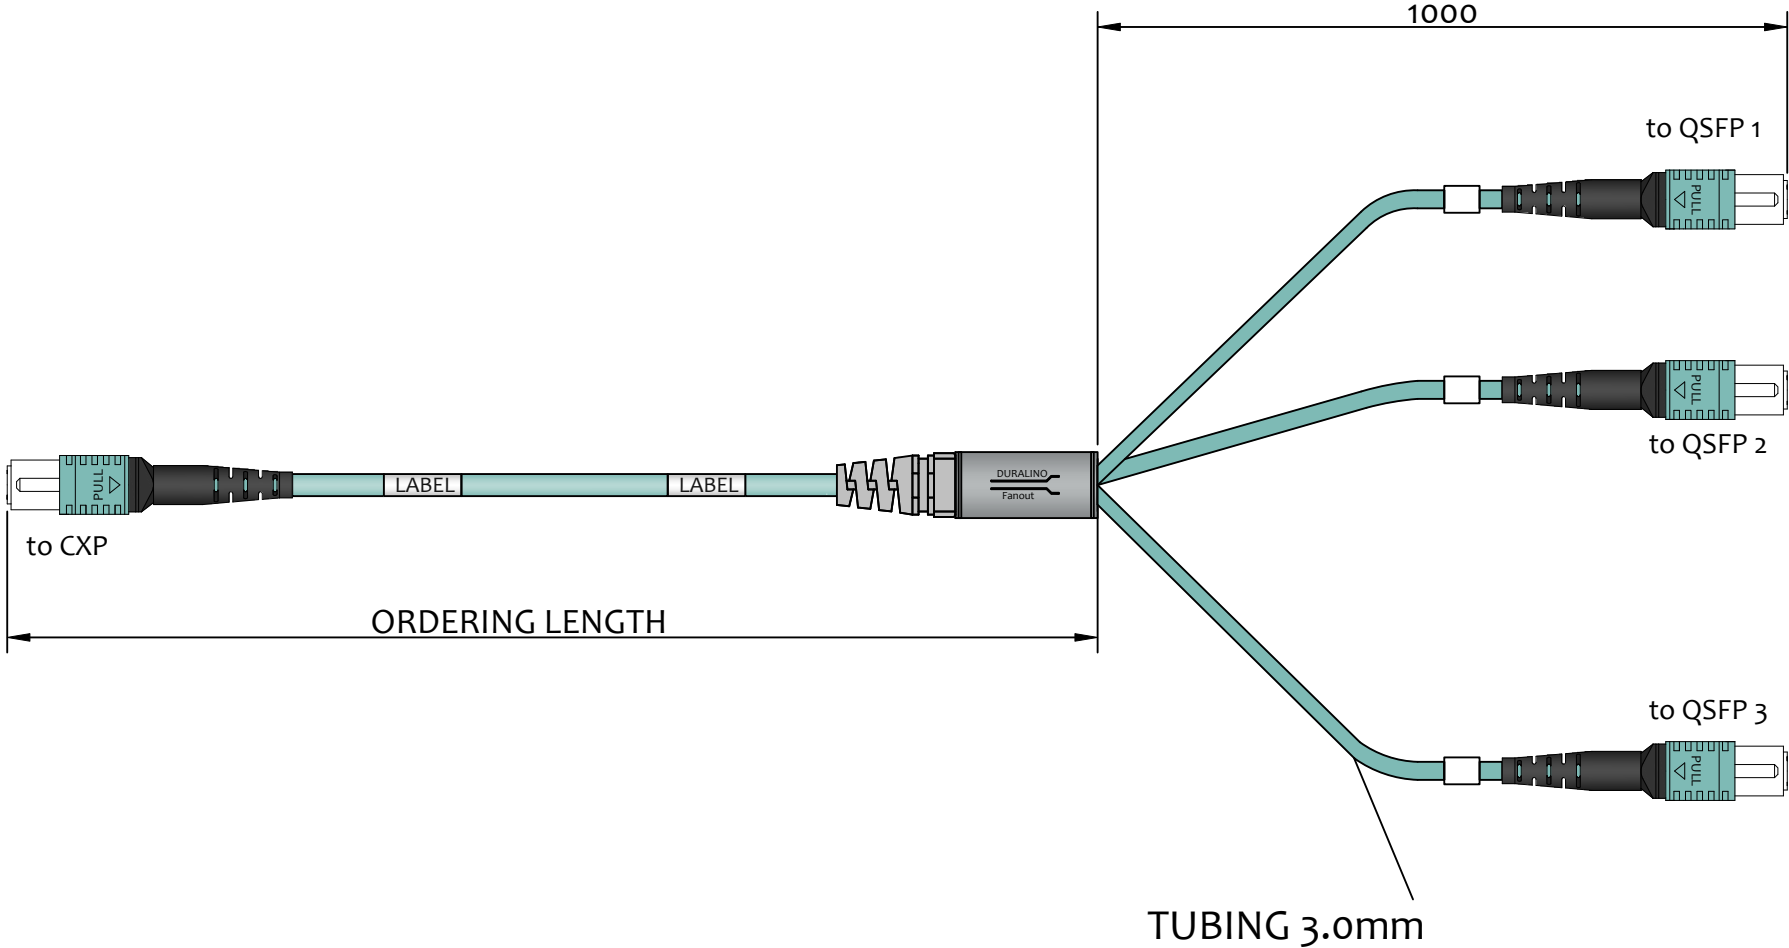

ORDERING CODE

X24X-XXQ-xxx

- xxx cable length [050 = 50m, 001 = 1m]
- Q QSFP/CXP connection
- F MTP(F) 12F, J MTP(F) PRO 12F
- G MTP(F) 24F, K MTP(F) PRO 24F
- 3 OM3, 4 OM4
- 24 24F
- T trunk, G trunk with grommet*

* SHOWN TRUNK VERSION WITH GROMMET [G]

- NOTES :
- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
 - 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
 - 3 - OM3, OM4 - IL<0.35dB , RL>20dB , 850nm & 1300nm
 - IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
 - RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
 - 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
 - END FACE GEOMETRY ACCORDING TO TELCORDIA 63267-3-31
 - 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
 - LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL, INSERTED IN CARDBOARD BOX
 - 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES ACCORDING TO
 - 7 - NO PULLING SYSTEM IS APPLIED. AVAILABLE ON DEMAND
 - 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

REVISION-DATE: A - 12.05.2020	CHANGE:	DRAWN BY, DATE: M. Ruzbarky 2020/05/12	TITLE: 24f 1xMTP - 3xMTP Duralino fanout CXP/QSFP		
New drawing		CHECKED BY, DATE: Pavlov/Matúš			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanská	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
			PRODUCT NUMBER:	DRAWING NUMBER: 1-W-1987_1_A	SHEET NO. 1 of 1
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	A	F-rack		SIZE A3