


## SC Din Rail Box

### Basic characteristic

- Number of cable ports: 4
- Maximum cable diameter: 9 mm
- Available front plates
- 4x SC simplex/duplex port
- 6x SC simplex/duplex port
- Compatible with standard dimensions of DIN rail 35 x 24x 7,5 mm

3 variants available:

- Fully loaded with pigtails ready for splicing
- With adapters
- Empty

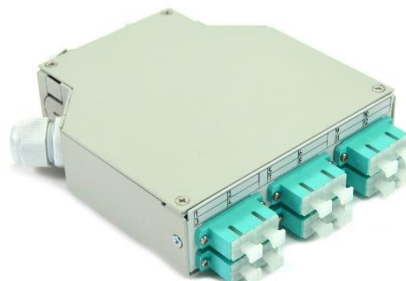

### Temperature range

Indoor controlled environment (-10°C/+60°C)

### Parameters

|                                                 |                                               |
|-------------------------------------------------|-----------------------------------------------|
| Dimensions                                      | 129 x 125 x 36 x mm                           |
| Material                                        | powdered coating steel                        |
| Colour                                          | light gray RAL7035                            |
| Capacity                                        | up to 12 fibers/connectors                    |
| Cable entry port                                | 1x PG11, 3x PG11 screw plug or other variants |
| Fixation methode                                | Din Rail Snap-on holder                       |
| Insertion Loss<br>(acc. IEC 61300-3-4 method B) | <0,25dB<br>(@1310/1550nm)                     |
| Return Loss<br>(acc. IEC 61300-3-6)             | >50dB (UPC)/>60dB (APC)<br>(@1310/1550nm)     |
| <b>Identification</b>                           | >30dB (@850/1300nm)                           |

Label with unique serial number.

### Packaging

Each Din Rail Box in cardboard box, bulk pack in master cardboard box.

\* Specifications are subject to change without notice

För mer information kontakta oss på [info@fracksystems.se](mailto:info@fracksystems.se)