

Features

- Low impedance 8Ω input ceiling loudspeaker
- 6" +1.5" coaxial fiber speaker unit
- Hi-fi level speaker for home use
- RMS 20W and MAX 40W power output
- Built-in crossover
- Metal grille & ABS baffle
- Paint in white color
- Flush mount secure installation

Description

The T-206F is a low impedance 8Ω input ceiling mount speaker, it is built-in 6"+1.5" coaxial fiber speaker driver and a crossover is equipped to achieve hi-fi level sound performance of frequency response 60-18kHz, and the RMS 20W and MAX 40W power output are suitable for foreground and background music system.

The metal grille and ABS baffle are painted in attractive white color. Its flush mount type makes the easy and secure installation.


The hi-fi sound quality and excellent frequency response make it is ideal choice for residential and commercial applications in hotel, school, office and factory where background music and paging is needed.




Specification

Model	T-206F
Rated Power	20W
Max Power	40W
Impedance	Black: Com Red: 8Ω
SPL(1W/1M)	85dB
Max. SPL (Rated W/1M)	100dB
Frequency Response (-10dB)	60-18KHz
Finish	Baffle: ABS, White Grille: Steel, White
Speaker Driver	6" x 1 1.5" x 1
Cutout Size	200mm
Dimensions	230 x 90mm
Weight	1.3Kg
Mounting	Flush-mount dog ears

Appearance:

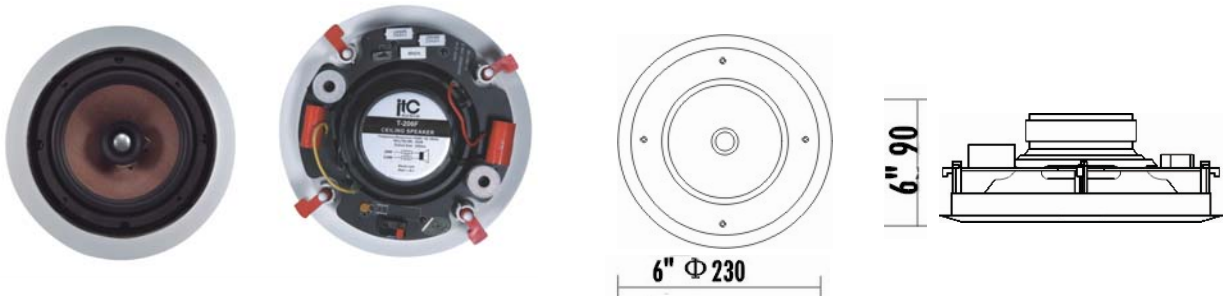

Direction Diagram:

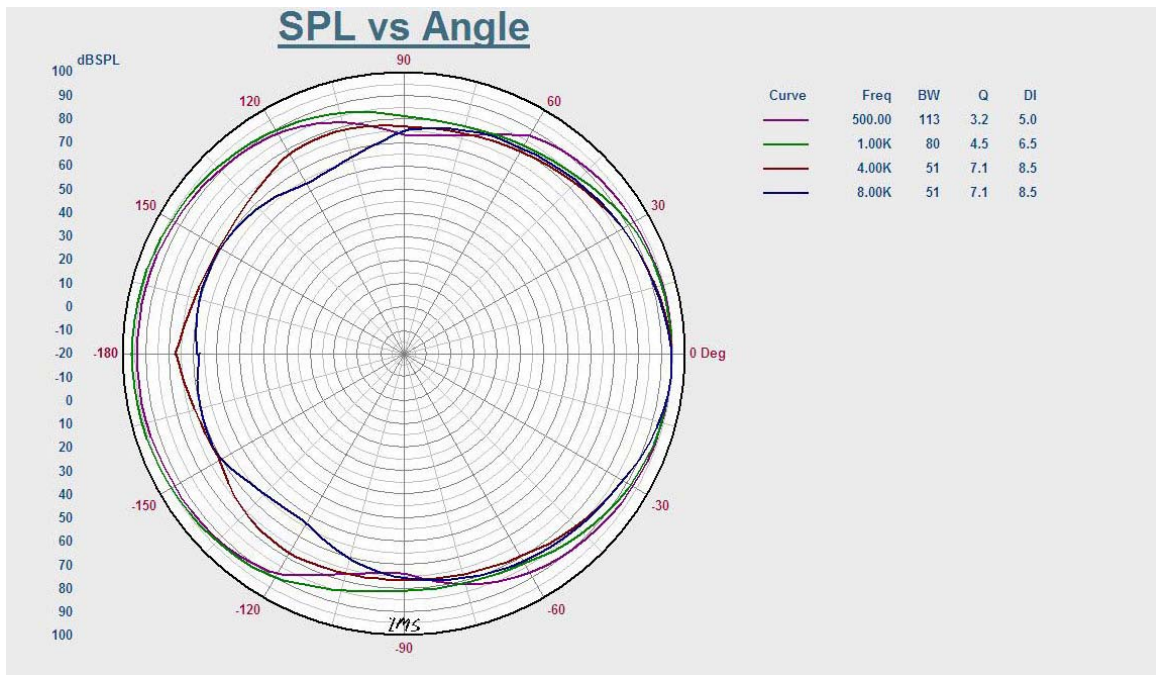

Frequency Response:

