

Padimount

Installation Instructions

Introduction:


Your Padimount in-wall tablet mount was designed to securely and elegantly mount your tablet to the wall. It is thin enough to mount over a stud in drywall as thin as 1/2". It comes with either a fingerprint resistant stainless steel, or a paintable white outer frame. The kit includes a USB over CAT5E power extender, as well as all necessary mounting hardware and accessories.

Contents:

- (1) Assembled Bracket / Frame
- (1) Retaining Ring with Neodymium Magnets
- (1) Decorative Faceplate
- (1) USB (male) to RJ-45 (female) Charging Adapter
- (1) USB (female) to RJ-45 (female) Charging Adapter
- (1 set) P-Clamps with Screws
- (1 set) Security Screws
- (1 set) Mounting Screws
- (1) Instruction Manual
- (1) Cutout Template
- (1) 2.5mm Allen Key

Placement*: Determine if you will be mounting your tablet horizontally or vertically. Using the faceplate as a guide, locate the position on the wall where the mount will be installed. Because of the shallow depth of the Padimount in-wall bracket, it is not necessary to limit placement only to areas between studs.


The in wall bracket is designed for use in locations where 1/2" or 5/8" drywall has been installed. In locations where other building materials have been used it may be necessary to use the included mounting screws to install the bracket.

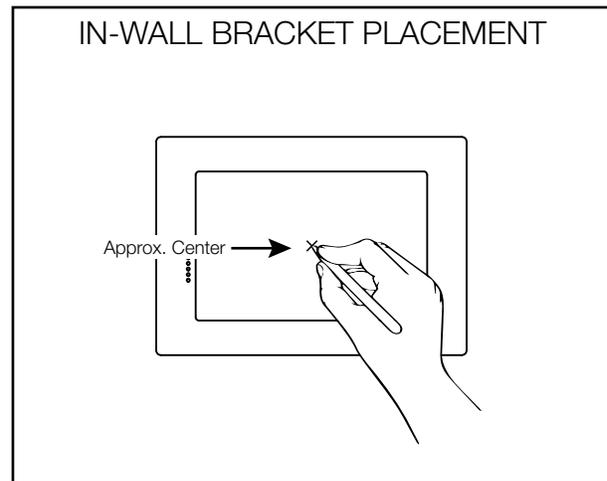

Measure and mark the center point of the location you have chosen.


**This step will have already been done if a rough-in ring has been installed.*

Cutting the Opening*: Using a level, center and place the included cutout template over the center point, making sure to maintain the correct orientation (horizontal or vertical) of the tablet. Mark and cut the opening using the appropriate tool, taking care not to damage any wiring, plumbing or ductwork inside the wall.

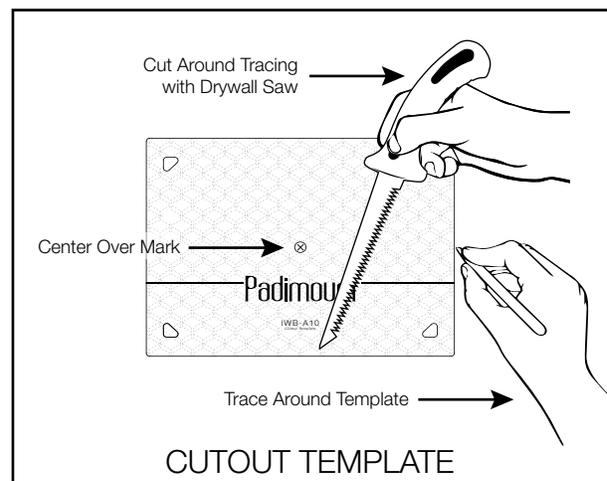

To allow the bracket frame to sit flush with the wall, and to allow the dog-ears to swing easily into place, trim any rough interior or exterior edges of the drywall opening.


**This step will have already been done if a rough-in ring has been installed.*

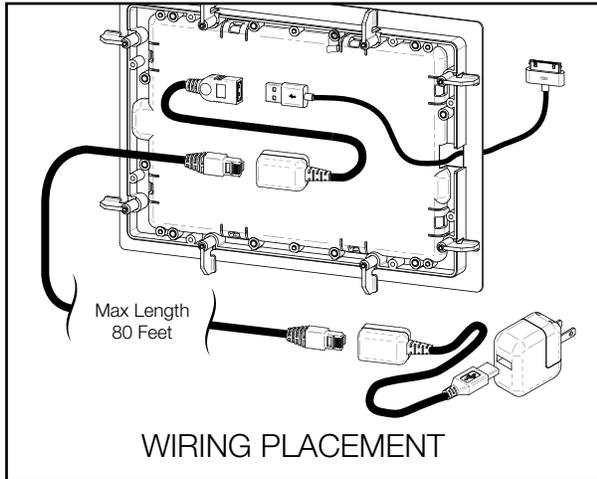


Install the Charging Adapter: The USB to CAT5E charging adapters are designed to be used with the power adapter and charging cable that came with your tablet. Using a terminated CAT5E patch cable you can extend the ability to charge your tablet up to 80 feet (Do not exceed without POE injection - not included).

Connect the USB (male) charging adapter to the wall plug that came with your tablet, and to the Ethernet patch cable. Connect the other end of the patch cable to the USB (female) charging adapter. Connect the USB cable that came with your tablet to the charging adapter and secure both the USB and patch cables to the back of the Padimount in-wall bracket using the included P-clamps. Leave enough slack in the cable to connect your tablet and route the end of the cable through the opening in the bracket frame.


Install the In-Wall Bracket: Remove the steel faceplate, as well as the plastic retaining ring, and set them aside.

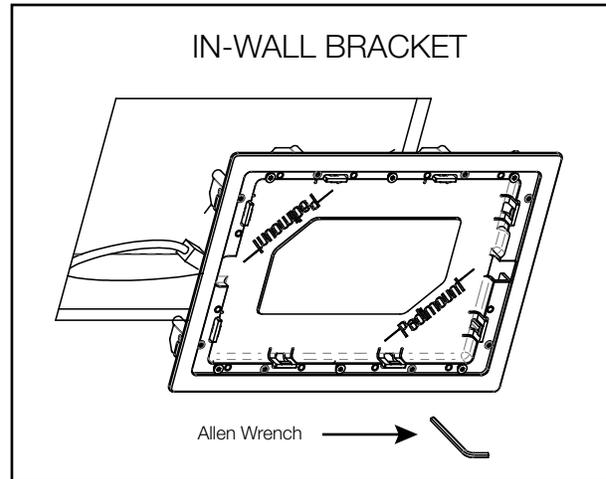

Place the in-wall bracket in the cutout opening, taking care not to kink the charging cable. Making sure the frame is level; carefully tighten each of the dog-ear screws around the perimeter to secure the frame. As you tighten each dog-ear it will swing into place and begin to clamp the frame to the drywall. It is important not to over tighten any of the dog-ears, as this may warp the bracket and make it difficult to install your tablet later.

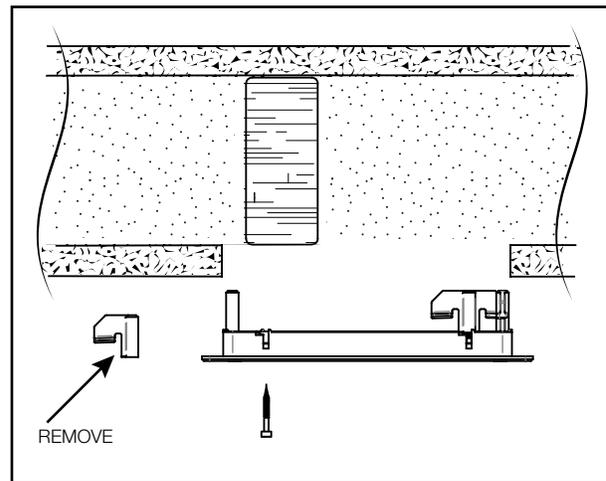


If the opening in the drywall is obstructed by a wooden stud or other obstruction, it may be necessary to remove one or more of the dog-ears. If this occurs, use one of the included mounting screws to secure the

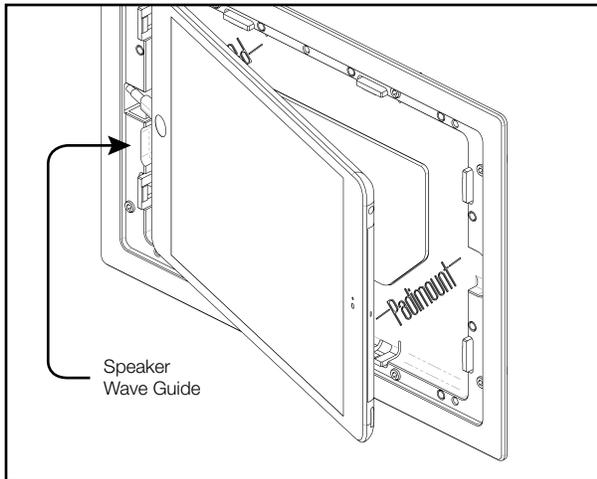

Install the Tablet:


Attach the charging cable to the tablet and carefully position the charging connector through the opening of the bracket frame. Press the tablet firmly into the frame and make sure that all of the latching tabs grip the edges of the tablet.

Place the magnetic retaining ring over the tablet with the logo facing outward, making sure that the opening for the speaker is oriented correctly.

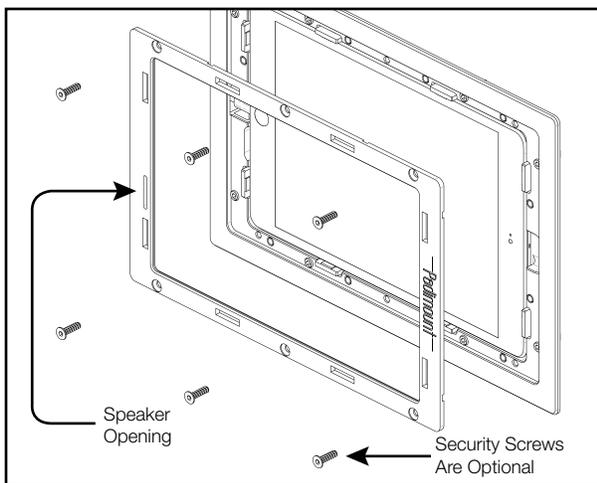

There are several holes around the retaining ring for use with the included security screws, to more permanently secure the tablet to the frame. These will make it difficult to remove the tablet without the proper tools. Use of the security screws is optional, but highly recommended in installations where the tablet will not be moved except for service.

With the retaining ring in place, attach the steel faceplate to the frame. The faceplate is held securely in place by the magnets in the retaining ring. Make sure to orient the faceplate correctly so that the speaker opening lines up with the opening in the retaining ring.

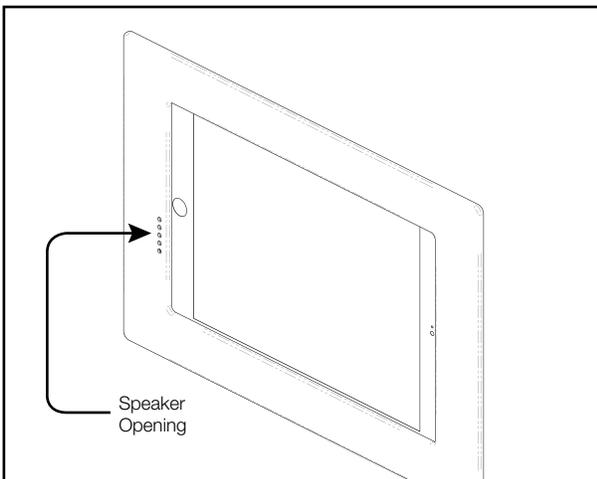

Painting Tips:

Make sure all surfaces are clean, dry and free from dust or other residue before painting.

Use a high quality bonding primer designed for painting plastics (example: XIM 400W) Lacquer, Oil or Polyurethane based paints generally offer the most durability.




Paint the faceplate face up, slightly raised off the surface.

For best results, DO NOT roll or brush the paint. Spray using light coats to avoid paint buildup.

frame, or simply omit the dog-ear in that location if the wood screw is not a suitable option.




A7 DIMENSIONS

INCHES [MILLIMETERS]

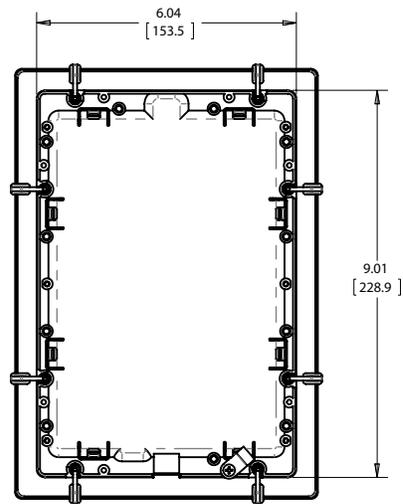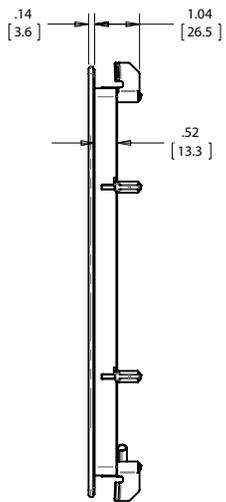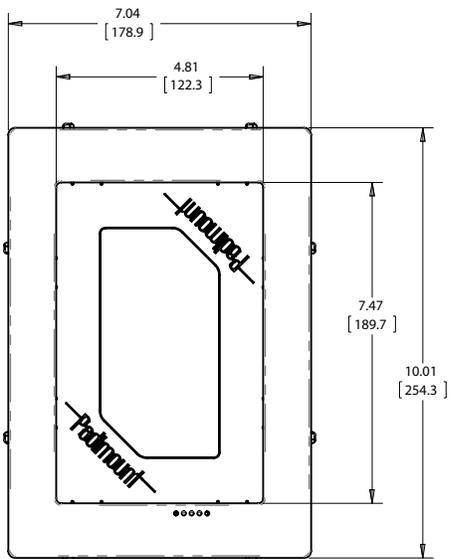

A10 DIMENSIONS

INCHES [MILLIMETERS]

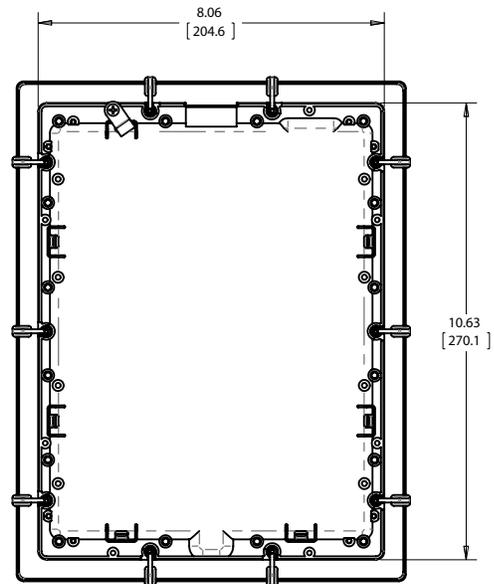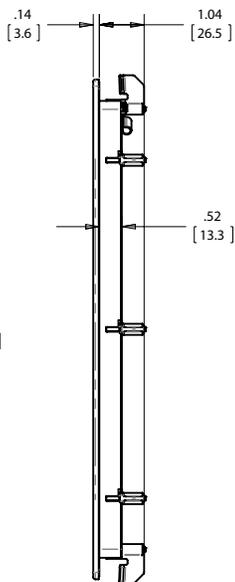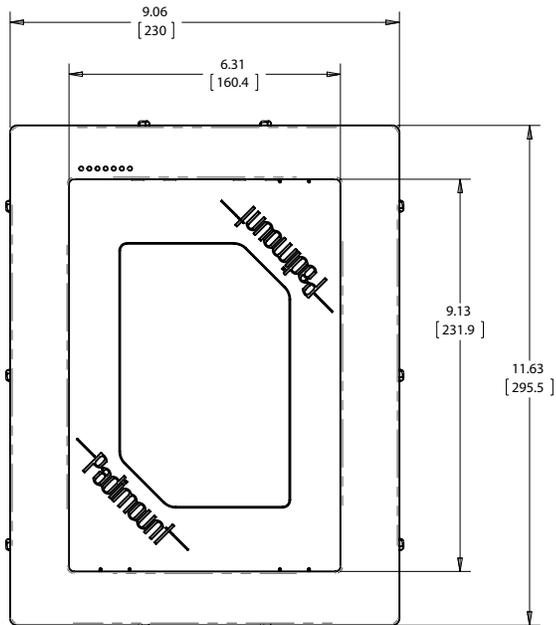

Warranty:

Two years from date of purchase. For warranty information, please go to www.padimount.com.