

## 203003F EXTENSION LANYARD

Webbing lanyard to create an extension of the dorsal attachment point of a full body harness.  
This allows the attachment point to be shifted from the back to the shoulder for easier access.

Can be attached to any full body harness using the steel quick link and velcro strap.

CONSTRUCTION

ROOF

TOWERS/INDUSTRY

OVAL QUICK LINK STEEL Ref.0934  
Oval quick links made of zinc plated carbon steel. 8 mm diameter.  
To be attached to dorsal attachment point of the harness.



Polamide tubular webbing.  
Width 27 mm

Velcro strap.

CE label with Batch and individual Serial number.

High strength polyamide stitching.

ACCESS RING Ref.2046  
Aluminum alloy connection ring.  
Diameter:  
Int.34 mm - Ext.54 mm

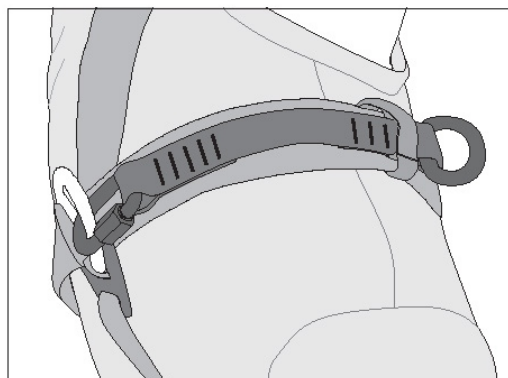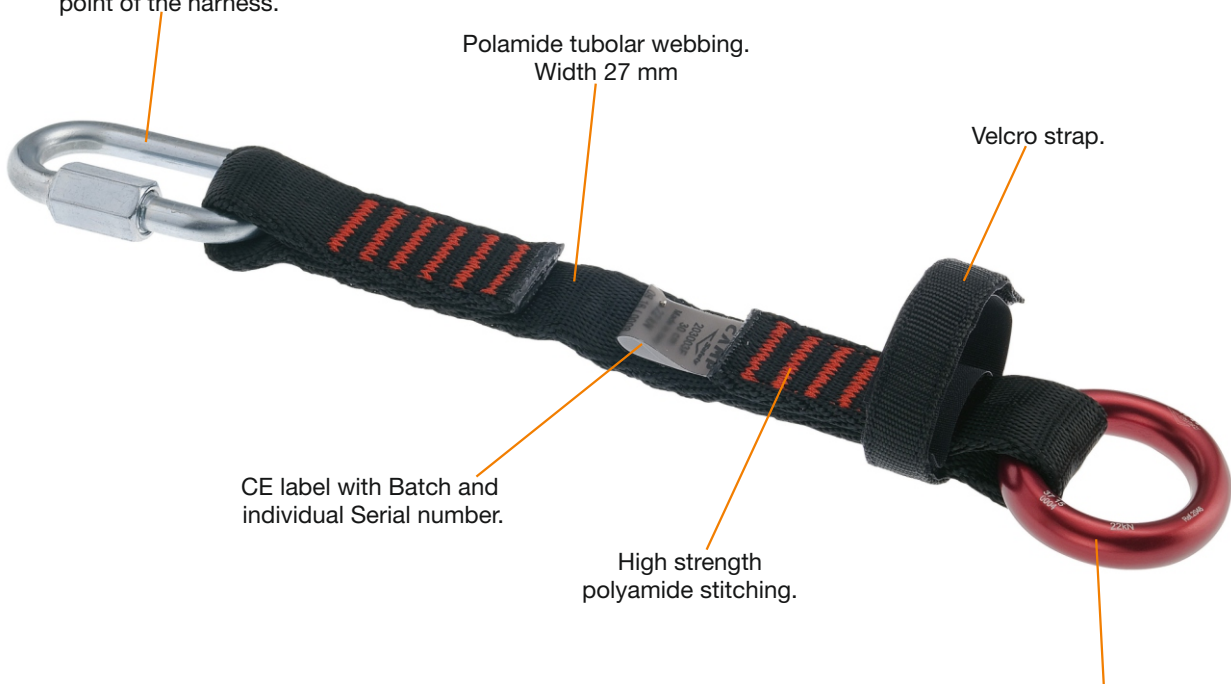

Ref.	Product name Nombre del producto	Length Longitud	Weight Peso		Strength Resistencia	CE EN 354
			g	oz		
203003F	EXTENSION LANYARD 30 cm + 0934 + 2046	30 cm	155	5.5	22	•