

## Ref.2077 COBRA 15

Self-retracting fall arrester with a cable length of 15 m. Also certified for horizontal/incline use if used in combination with an energy absorbing lanyard (ref. 5030101).

4 mm galvanized steel cable with a breaking strength of

12 kN is protected by a durable ABS cover.

Complete with auto-locking swivel connector and internal

mechanical energy absorbing system.

Attachment

CONSTRUCTION

ROOFS

point



CONFINED



TOWERS/INDUSTRY



EDGE **TESTED** Till r ≥0.5 mm CNB/P/11.060


Galvanized cable Ø4 mm Strength >12 kN Length 15 m


> Fall indicator integrated on the connector

Double action safety connector with swivel ref.0925 Strength >23 kN Opening 20 mm Zinc Plated

Supplied with guiding cord Ø5 x 15 m, useful to guide the cable back into the retractor





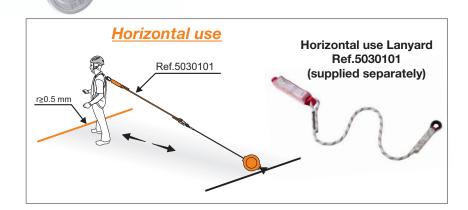

Ref.	Product name Nombre del producto	Weight Peso			C€	A STANDARD	ERC	41
		kg	lb	oz	EN 360	CNB/P/11.060		
2077	COBRA 15 m	7.0	15	7	•	•	•	