


Ref.3121 FLYTE

Linear double pulley specifically designed for crossing cables and zip lines. Sealed ball bearings for low friction and high speed (max 20 m/s). Aluminum alloy main body and stainless steel wheels. Accommodates ropes up to 13 mm and steel cables up to 12 mm in diameter. Large main attachment hole and secondary connection point on top.

TEAM RESCUE


ROPE ACCESS

TREE CLIMBING

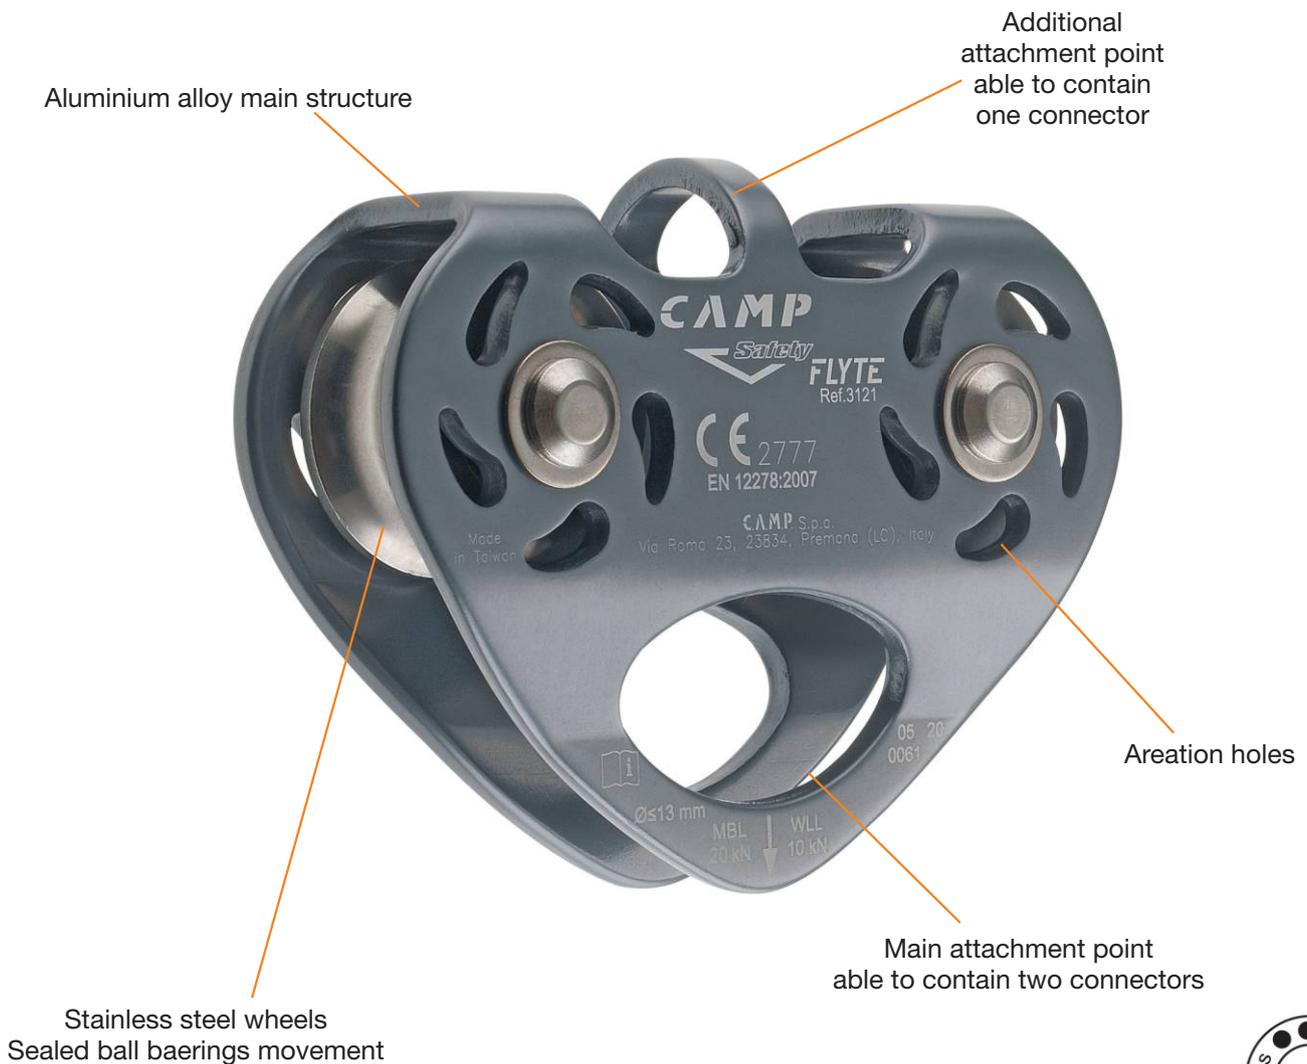

Ref.	Product name Nombre del producto	Weight Peso		Inner sheave diameter Diámetro de roce interior	Rope diameter Diámetro de cuerda	Cable diameter Diámetro del cable	Working load max Carga de trabajo max		Breaking load Carga de rotura		CE EN 12278
		g	oz				mm	Max - mm	Max - mm	kN	
3121	FLYTE	280	9.9	27	13	12	10	2248	20	4497	•

Ref.3121 FLYTE

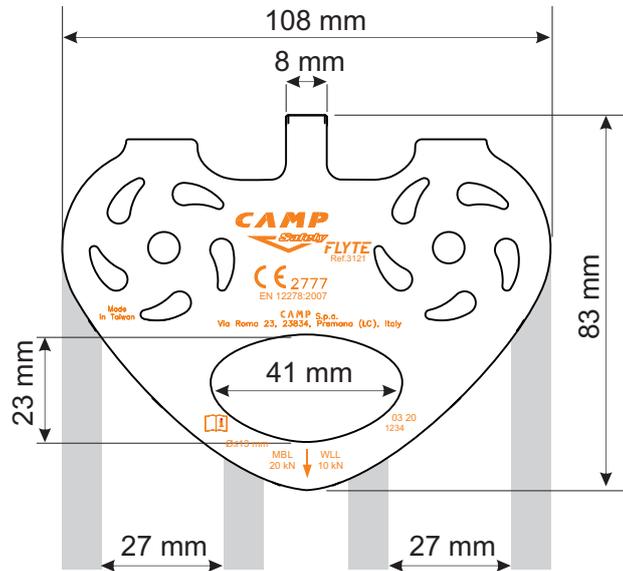

<p>1</p>	<p>MBL Minimum breaking load</p>	<p>WLL Working load limit</p>	<p>2</p> <p>max speed 20 m/s</p> <p>1 kN 120° 1 kN 1 kN</p> <p>3 kN 160° 3 kN 1 kN</p>	<p>4</p> <p>Ø ≤ 13 mm</p> <p>STEEL CABLE Ø ≤ 12 mm</p>
<p>A Main attachment hole</p> <p>5+5 5+5 20 kN</p> <p>25+25 25+25 10 kN</p>	<p>MBL Minimum breaking load</p> <p>20 kN</p> <p>WLL Working load limit</p> <p>10 kN</p>	<p>WLL Working load limit</p> <p>10 kN</p>		
<p>B Becket</p> <p>15 kN</p> <p>6 kN</p>	<p>MBL Minimum breaking load</p> <p>15 kN</p> <p>WLL Working load limit</p> <p>6 kN</p>	<p>WLL Working load limit</p> <p>6 kN</p>	<p>5</p> <p>F=0.45 P</p> <p>F</p> <p>P</p> <p>F=0.3 P</p> <p>F</p> <p>P</p>	
<p>3</p> <p>MAIN HOLE</p>	<p>BECKET</p>			