

Ref.3124 TREE ACCESS ANSI XT

INTERNATIONAL
CE + ANSI

TREE CLIMBING

ROPE ACCESS

PLATFORMS

A fully certified fall-arrest harness with all the functions of the Tree Access ANSI ST saddle. The Tree Access ANSI XT is the perfect harness for workers who want the maximum efficiency and performance for SRT maneuvers and who need fall-arrest certification for work in buckets and elevating platforms.

The sturdy build meets European CE EN, ANSI and ASTM standards.

The sit harness offers many connection possibilities for efficient organization, work and positioning: two mobile attachment bridges made of rope reinforced with tubular webbing; side loops at the ends of the lower bridge and aluminum alloy ring on the upper bridge; double ventral attachment point, one metallic and one textile; two side rings and one back ring on the belt; numerous gear loops and slots for the Kilo gear carabiner.

Fully equipped chest harness: sternal and dorsal fall arrest points with activation indicators; dedicated attachment points for the Turboknee System ascender; 3Lock carabiner with removable anti-rotation pin; parking position for fall arrest lanyard.

The comfort is incomparable: adjustable connection of the mobile bridges to the belt allow the worker to adjust the position of suspension; ergonomic padding with variable thickness; low-profile patented STS ANSI buckles on the leg loops; ergonomic padding on the shoulders.

2 sizes.



Ref.	Product name Nombre del producto	Size Tallas	Weight Peso		Waist Cintura	Legs Perneras	Height Altura	CE			ANSI		ASTM	Attachment points Puntos de anclaje
			g	oz	B (cm)	C (cm)	D (cm)	EN 358	EN 361	EN 813	Z359.11	Z133:2017	F887	
3124	TREE ACCESS ANSI XT	S-L	3230	114.0	80-120	50-65	55-75	•	•	•	•	•	•	
		L-XXL	3350	118.3	90-135	60-75	65-85	•	•	•	•	•	•	

Ref.3124 TREE ACCESS ANSI XT INTERNATIONAL CE + ANSI



- ① Two mobile attachment bridges made of rope reinforced with tubular webbing; side loops at the ends of the lower bridge and aluminum alloy ring on the upper bridge.
- ② Double ventral attachment point, one metallic and one textile.
- ③ Two side rings and one back ring on the belt.
- ④ Numerous gear loops and slots for the Kilo gear carabiner.
- ⑤ Fully equipped chest harness: sternal and dorsal fall arrest points.
- ⑥ Load indicators stitching.
- ⑦ Waist belt and leg loops are made of ergonomic thermoformed padding to offer broad structural support and are connected by optimally spaced connection straps that give the harness a precise and comfortable fit.
- ⑧ Dedicated attachment points for the Turboknee System ascender.
- ⑨ 3Lock carabiner with removable anti-rotation pin.
- ⑩ Parking position for fall arrest lanyard.
- ⑪ Adjustable connection of the mobile bridges to the belt allow the worker to adjust the position of suspension.
- ⑫ Keeper strap for securing a chest ascender in a streamlined way.
- ⑬ Patented STS ANSI buckles on the leg loops.
- ⑭ Ergonomic padding on the shoulders.
- ⑮ Back leg-loops connection webbings adjustable in length.
- ⑯ Patented "Sicura" buckles for fastening "Access Swing" Ref.1963.
- ⑰ Steel buckles for belt and chest adjustment.




Turboknee System
3127
Sold separately
Se vende por separado



LANYARD PARKING



FALL INDICATOR

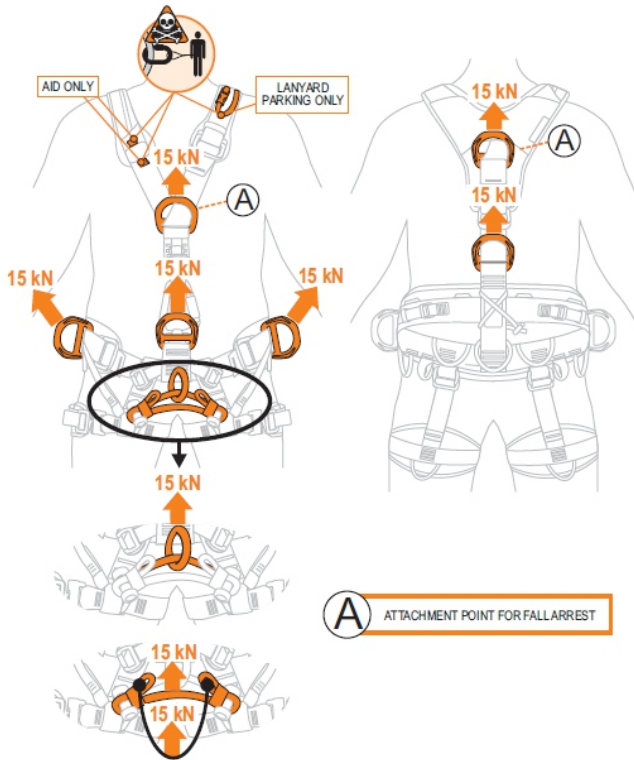

A ATTACHMENT POINT FOR FALLARREST

EN 361:2002	1	EN362	EN355	EN354
ANSI Z359.11-2014 Sternal & Dorsal	2	EN362	Fall arresters	EN353 EN360 EN12841A
EN 813:2008	3	EN362	EN354 EN358	
ANSI Z359.11-2014 Ventral	4	EN362	Descender/Rope clamps	EN341 EN12841B/C
ASTM F887-2020	5			
EN 813:2008	6			
ANSI Z359.11-2014 Ventral	7	EN 362	EN 358	
ASTM F887-2020				
EN 358:2018	8	EN 362	EN 358	
ANSI Z359.11-2014 Hip				
EN 358:2018	9	EN 362	EN 354 EN 358	
ANSI Z359.11-2014 Waist Rear				

“TREE ACCESS” SPARE PARTS

Access Ring

2046 34 mm

204601 45 mm

Aluminum alloy connection ring that is useful for the connection of various fall arrest components and can be inserted into the mobile bridge system of the Tree Access series harnesses. Available in two color-coded sizes with different diameters.

2021 UPDATE: ANSI Z359.12 certification (ref.204601).



Ref.	Product name Nombre del producto	Weight Peso		Diameter Diámetro	Strength Resistencia	CE	ANSI
		g	oz				
2046	ACCESS RING 34 mm	34	1.2	Int. 34 - Ext. 54	24	•	
204601	ACCESS RING 45 mm	59	2.1	Int. 45 - Ext. 69	30	•	•

Tree Access Evo/ANSI Bridge with Side Loops

216403 32 cm

216404 37 cm

216405 42 cm

Mobile attachment bridge for the Tree Access Evo, Tree Access ANSI ST and XT harnesses.

Equipped with side attachment loops for positioning.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in three lengths: 32 cm, 37 cm and 42 cm.



Ref.	Weight Peso	
	g	oz
216403 - 32 cm	65	2.3
216404 - 37 cm	70	2.5
216405 - 42 cm	75	2.6

Tree Access Evo/ANSI Bridge with Side Loops + Gyro

216406 32 cm

216407 37 cm

216408 42 cm

Mobile attachment bridge equipped with the patented Gyro triple swiveling device for maximum freedom of movement. Equipped with side attachment loops for positioning.

Compatible with the Tree Access Evo, Tree Access ANSI ST and XT harnesses.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in three lengths: 32 cm, 37 cm and 42 cm.



Ref.	Weight Peso	
	g	oz
216406 - 32 cm	225	7.9
216407 - 37 cm	230	8.1
216408 - 42 cm	235	8.3

Tree Access ANSI Bridge No Side Loops

216409 32 cm

216410 37 cm

Mobile attachment bridge for the Tree Access ANSI ST and XT harnesses. Simplified version without side loops.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in two lengths: 32 cm and 37 cm.



Ref.	Weight Peso	
	g	oz
216409 - 32 cm	45	1.6
216410 - 37 cm	50	1.8

“TREE ACCESS” SPARE PARTS**Tree Access Webbing Bridge****216401** 25 cm**216402** 30 cm

Webbing replacement mobile attachment bridge.
Compatible with the Tree Access Evo and Tree Access harnesses.
Available in two lengths: 25 cm and 30 cm.



Ref.	Weight Peso	
	g	oz
216401 - 25 cm	30	1.1
216402 - 30 cm	35	1.2