

## Ref.3125 TREE ACCESS ANSI ST

INTERNATIONAL  
CE + ANSI

TREE CLIMBING

The perfect tree climbing sit harness for professionals looking for maximum versatility combined with exceptional comfort.

Designed to be used in combination with the Tree Access SRT Chest progression chest part and the Turboknee System ascender for SRT.

The sturdy build meets European CE EN, ANSI and ASTM standards.

The harness offers many connection possibilities for efficient organization, work and positioning: two mobile attachment bridges made of rope reinforced with tubular webbing; side loops at the ends of the lower bridge and aluminum alloy ring on the upper bridge; double ventral attachment point, one metallic and one textile; two side rings on the belt; numerous gear loops and slots for the Kilo gear carabiner.

The comfort is incomparable: adjustable connection of the mobile bridges to the belt allow the worker to adjust the position of suspension; ergonomic padding with variable thickness; low-profile patented STS ANSI buckles on the leg loops.


2 sizes.



### TREE ACCESS ANSI ST + TREE ACCESS SRT CHEST




3125+3126

Ref.	Product name Nombre del producto	Size Tallas	Weight Peso		Waist Cintura	Legs Perneras	CE		ANSI	ASTM	Attachment points Puntos de anclaje
			g	oz	B (cm)	C (cm)	EN 358	EN 813	Z133:2017	F887	
3125	TREE ACCESS ANSI ST	S-L	2230	78.7	80-120	50-65	•	•	•	•	
		L-XXL	2300	81.2	90-135	60-75					

## Ref.3125 TREE ACCESS ANSI ST INTERNATIONAL CE + ANSI



- ① Two mobile attachment bridges made of rope reinforced with tubular webbing; side loops at the ends of the lower bridge and aluminum alloy ring on the upper bridge.
- ② Aluminium alloy attachment ring, d.45xD.69 mm, 30 kN.
- ③ Bridge system is manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability. Two loops on the ends of the bridge create extra points for positioning.
- ④ Stainless steel connection rings with hexagonal screws for replacements of the rope webbing.
- ⑤ Ventral attachment point.
- ⑥ Two side rings on the belt
- ⑦ Numerous gear loops and slots for the Kilo gear carabiner.
- ⑧ Adjustable connection of the mobile bridges to the belt allow the worker to adjust the position of suspension
- ⑨ Ergonomic padding with variable thickness.
- ⑩ Patented STS ANSI automatic buckles on the leg loops.
- ⑪ Patented "Sicura" buckles for fastening the "Access Swing".
- ⑫ Back leg-loops connection webbings adjustable in length with new buckles.
- ⑬ One gear ring on each leg-loop.
- ⑭ Elastic webbing for "First Aid Kit" fastening.
- ⑮ Webbing loop for "Access Swing" fastening when not in use.
- ⑯ Three webbing loops for connect the chest part (TREE ACCESS SRT CHEST Ref.3126)

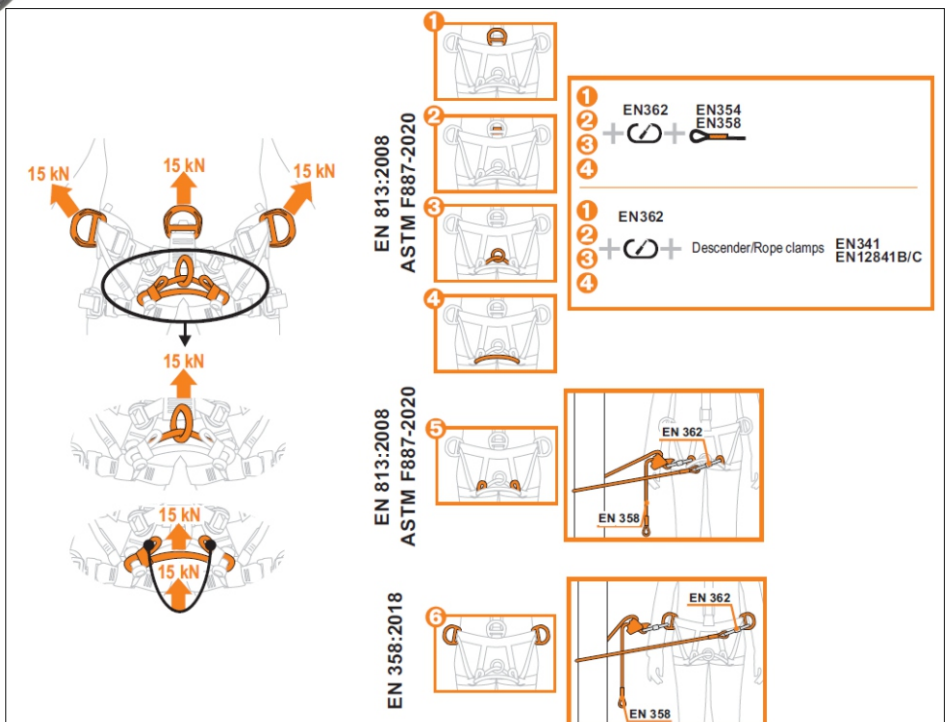

## TREE ACCESS ANSI ST + TREE ACCESS SRT CHEST

INTERNATIONAL  
CE + ANSI

Ref.3125 + Ref.3126



- ① Dedicated attachment points for the Turboknee System.
- ② Numerous loops for secondary connections.
- ③ Padded shoulders for all day comfort. Padding is color differentiated for left and right.

**WARNING:**

The Tree Access SRT Chest is a climbing aid/accessory harness, it must never be used to for life support or safety functions.



Turboknee System  
**3127**  
Sold separately  
Se vende por separado

Ref.	Product name Nombre del producto	Size Tallas	Weight Peso		Height Altura
			g	oz	D (cm)
3126	TREE ACCESS SRT CHEST	One size Talla única	265	9.4	55-85

## “TREE ACCESS ANSI ST” SPARE PARTS

### Access Ring

2046 34 mm

204601 45 mm

Aluminum alloy connection ring that is useful for the connection of various fall arrest components and can be inserted into the mobile bridge system of the Tree Access series harnesses. Available in two color-coded sizes with different diameters.

2021 UPDATE: ANSI Z359.12 certification (ref.204601).



Ref.	Product name Nombre del producto	Weight Peso		Diameter Diámetro	Strength Resistencia	CE	ANSI
		g	oz				
2046	ACCESS RING 34 mm	34	1.2	Int. 34 - Ext. 54	24	•	
204601	ACCESS RING 45 mm	59	2.1	Int. 45 - Ext. 69	30	•	•

### Tree Access Evo/ANSI Bridge with Side Loops

216403 32 cm

216404 37 cm

216405 42 cm

Mobile attachment bridge for the Tree Access Evo, Tree Access ANSI ST and XT harnesses.

Equipped with side attachment loops for positioning.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in three lengths: 32 cm, 37 cm and 42 cm.



Ref.	Weight Peso	
	g	oz
216403 - 32 cm	65	2.3
216404 - 37 cm	70	2.5
216405 - 42 cm	75	2.6

### Tree Access Evo/ANSI Bridge with Side Loops + Gyro

216406 32 cm

216407 37 cm

216408 42 cm

Mobile attachment bridge equipped with the patented Gyro triple swiveling device for maximum freedom of movement. Equipped with side attachment loops for positioning.

Compatible with the Tree Access Evo, Tree Access ANSI ST and XT harnesses.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in three lengths: 32 cm, 37 cm and 42 cm.



Ref.	Weight Peso	
	g	oz
216406 - 32 cm	225	7.9
216407 - 37 cm	230	8.1
216408 - 42 cm	235	8.3

### Tree Access ANSI Bridge No Side Loops

216409 32 cm

216410 37 cm

Mobile attachment bridge for the Tree Access ANSI ST and XT harnesses. Simplified version without side loops.

Manufactured from 10.5 mm semi-static rope covered with tubular webbing for the best durability.

Available in two lengths: 32 cm and 37 cm.



Ref.	Weight Peso	
	g	oz
216409 - 32 cm	45	1.6
216410 - 37 cm	50	1.8

**“TREE ACCESS ANSI ST” SPARE PARTS****Tree Access Webbing Bridge****216401** 25 cm**216402** 30 cm

Webbing replacement mobile attachment bridge.  
Compatible with the Tree Access Evo and Tree Access harnesses.  
Available in two lengths: 25 cm and 30 cm.



Ref.	Weight Peso	
	g	oz
216401 - 25 cm	30	1.1
216402 - 30 cm	35	1.2