

SPEEDY ANCHOR

ANCHOR WEBBING

Ref. 3615200

ROPE ACCESS, TOWERS/INDUSTRY, PLATFORMS, CONSTRUCTION, TACTICAL

Robust adjustable anchor webbing with two end loops of different lengths which allows to be installed with double passage or girth hitch.


Steel adjustment buckle. Adjustable length from 30 to 200 cm.

Certification for use by two people (TS 16415).




Ref.	Product name Nombre del producto	Weight Peso		Strength Resistencia	CE EN 795/B	STANDARD	EAC
		g	oz	kN		TS 16415	
3615200	SPEEDY ANCHOR 200 cm	420	14.8	22	•	TS 16415 •	•

Length adjustment

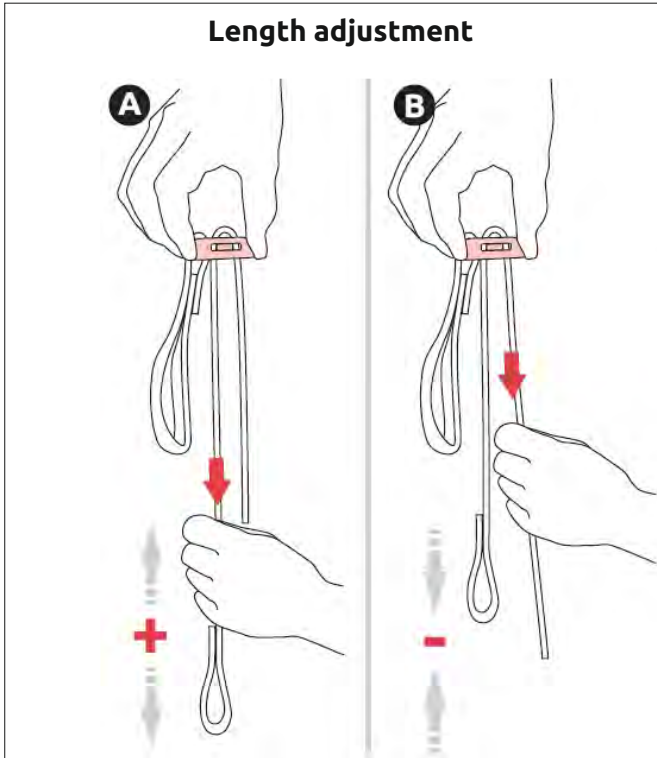

Installation

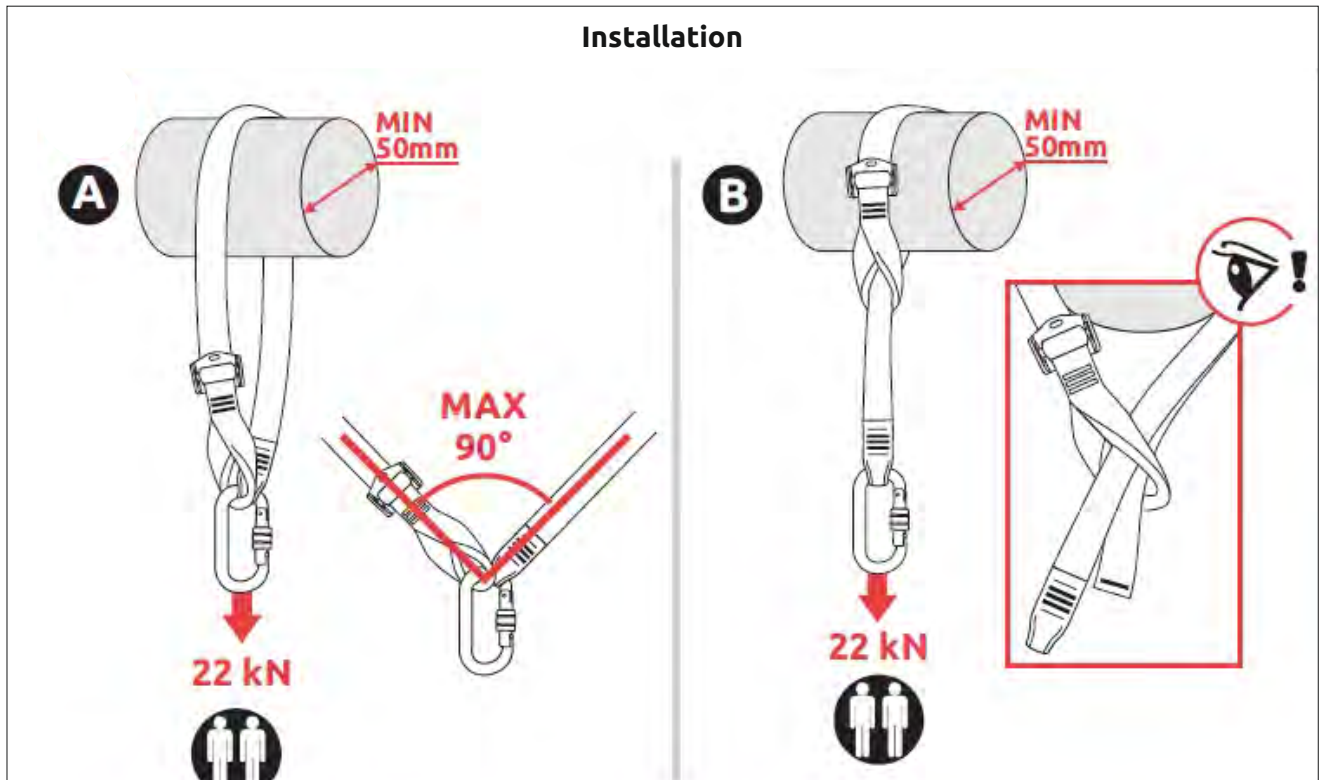

= CE 0123
 EN 795:2012/B

TS 16415:2013