

Ref. 3717

TOWERS/INDUSTRY, ROPE ACCESS


Sliding anchor point for metal I-beams with a width between 105 and 310 mm.

Easy and intuitive width adjustment using a double button. Smooth sliding thanks to protective polyamide material coverings on the clamps.

Robust steel attachment point that can rotate and tilt. Load-bearing structure constructed from lightweight aluminum alloy.

Certified as an anchor device EN 795/B and TS 16415 for two people and as an anchor connector ANSI Z359.18 Type A.

Equipped with NFC TRACK chip for digital identification.

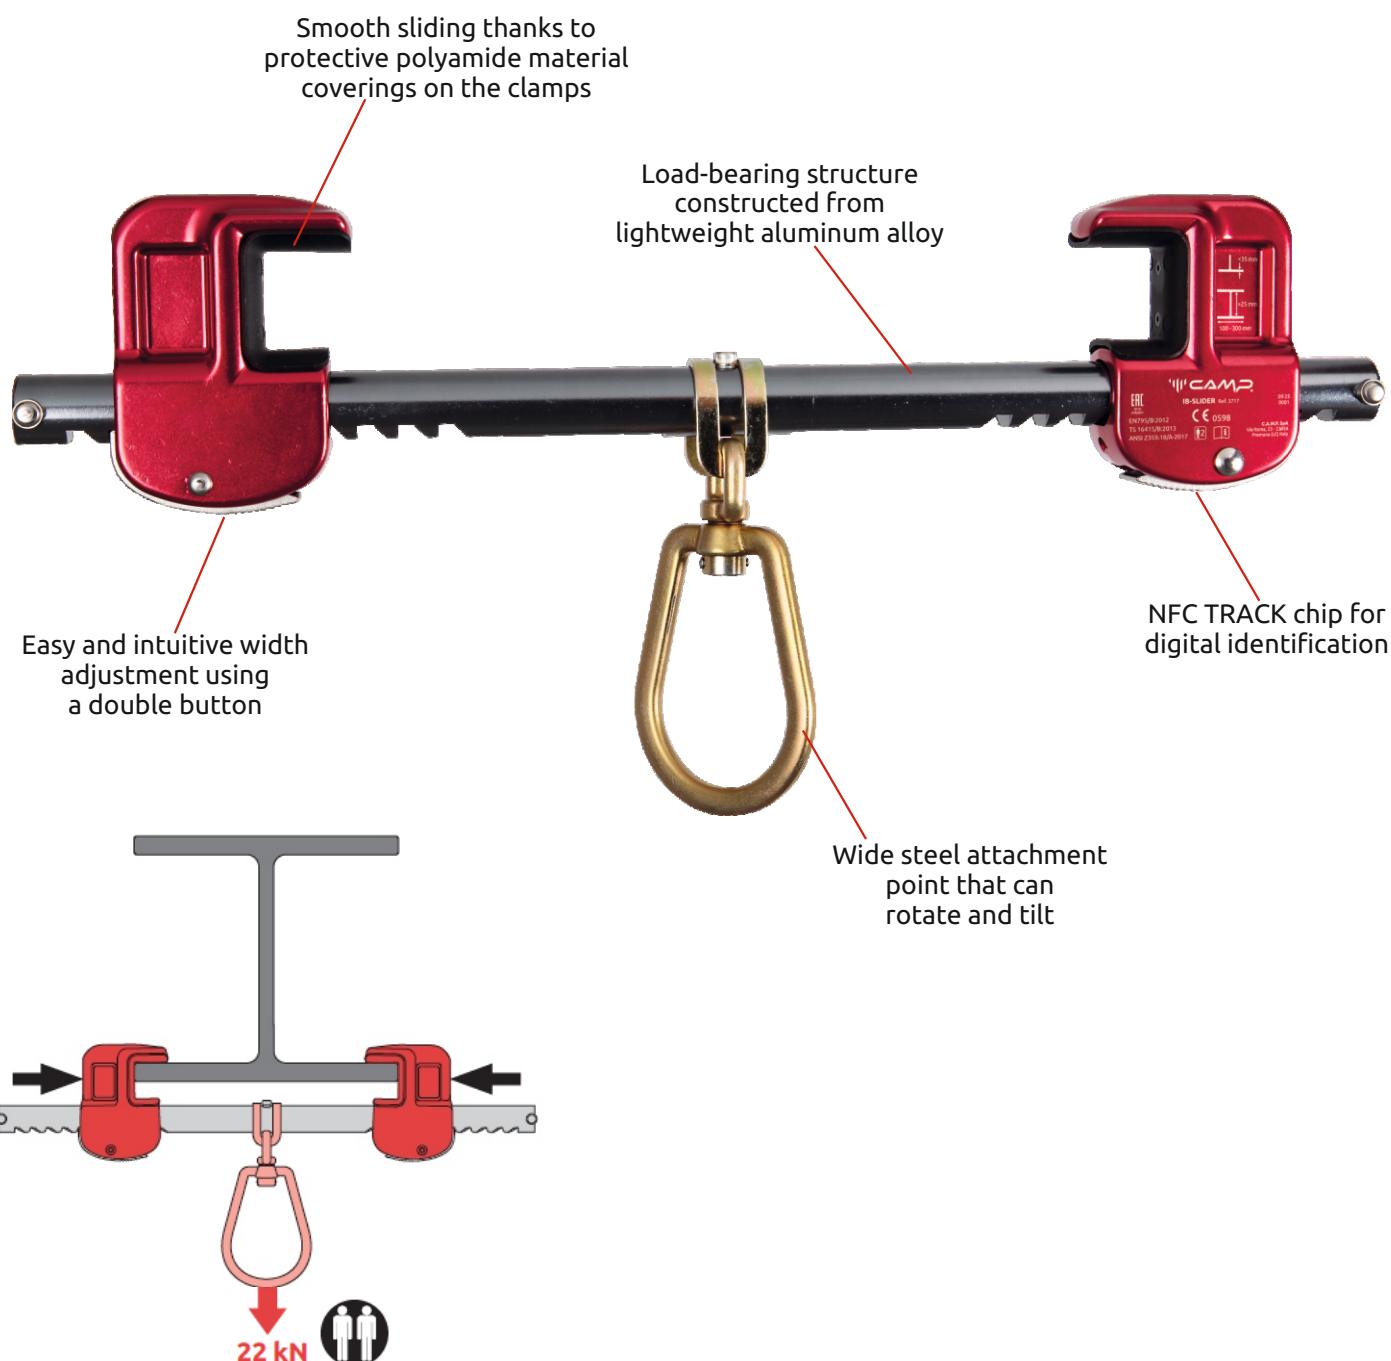

Ref.	Product name Nombre del producto	Weight Peso		CE	STANDARD	ANSI	ERC
		g	oz				
3717	IB-SLIDER	1650	58.2	•	TS 16415 •	Z359.18/A •	•