

Ref. 3718

TOWERS/INDUSTRY, ROPE ACCESS


Mobile anchor point for metal I-beams with a width between 105 and 320 mm.

Easy and intuitive width adjustment using a double button. Smooth movement thanks to the thermoplastic wheels.

Robust steel attachment point that can rotate and tilt. Load-bearing structure constructed from lightweight aluminum alloy.

Certified as an anchor device EN 795/B and TS 16415 for two people.

Equipped with NFC TRACK chip for digital identification.

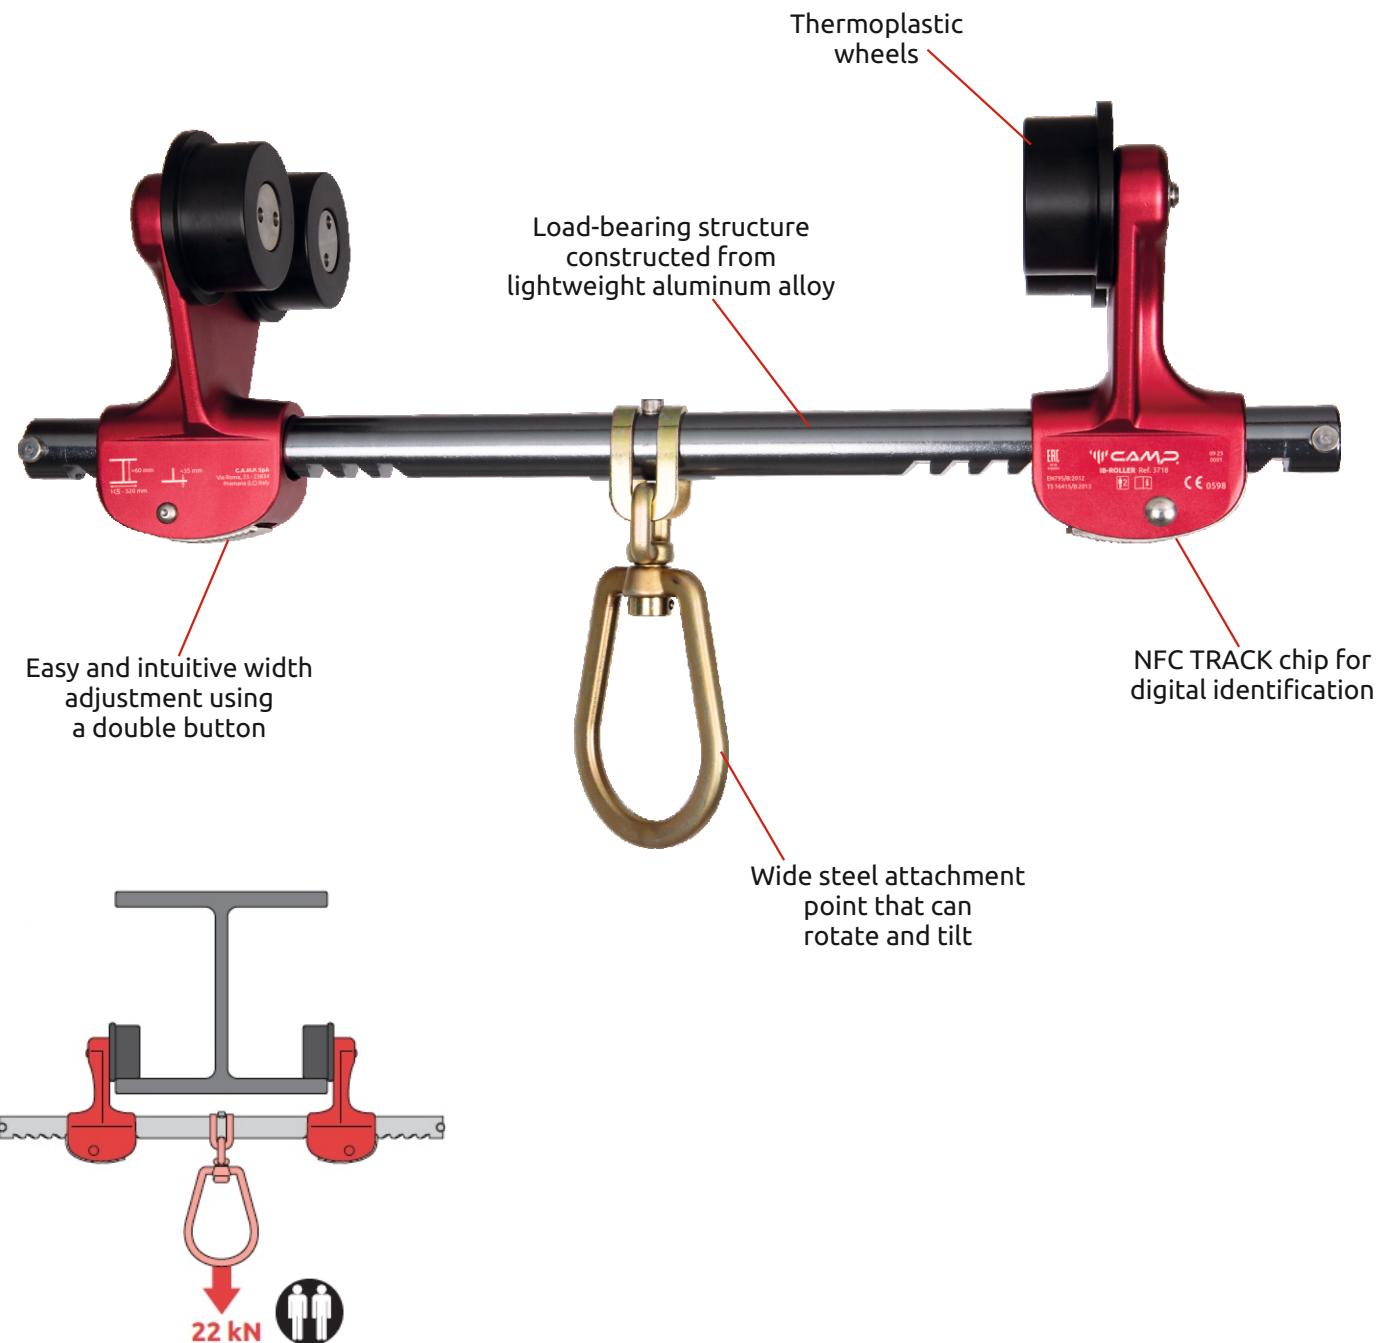

Ref.	Product name Nombre del producto	Weight Peso		CE	STANDARD	EAC
		g	oz		TS 16415	
3718	IB-ROLLER	2560	90.4	•	2 people	•