

Retexo Gyro Rope lanyards combine the unparalleled functionality of the proprietary Gyro swivel with robust rope lanyards. The Gyro3 swivel rotates at all three connection points to prevent twisting. Prium 10.5 mm semi-static rope lanyards have exceptional abrasion resistance and a high breaking strength. Loops and stitches are covered by a robust and compact protective system that is easy to inspect. Certified for horizontal use over sharp edges ( $r \geq 0.5$  mm).

The Retexo is a next generation energy absorber designed to be particularly light and compact.

Energy absorption is optimized to limit extension in the event of a fall as much as possible while still achieving a low fall arrest force.



With lanyards with a total length up to 200 cm, the Retexo is certified for workers with a maximum total weight up to 130 kg.

Ideal in situations with limited clearance (<4 m) when used with lanyards with a total length up to 150 cm.

Robust case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.

Equipped with NFC TRACK tag for digital identification.

**EDGE TESTED**




Certified for horizontal use over an edge

**GYRO + 2125 + 2x2148 135 cm**

Case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.

Retexo absorber with high load capacity: up to 130 kg!

10.5 mm semi-static rope: exceptional abrasion resistance and a high breaking strength

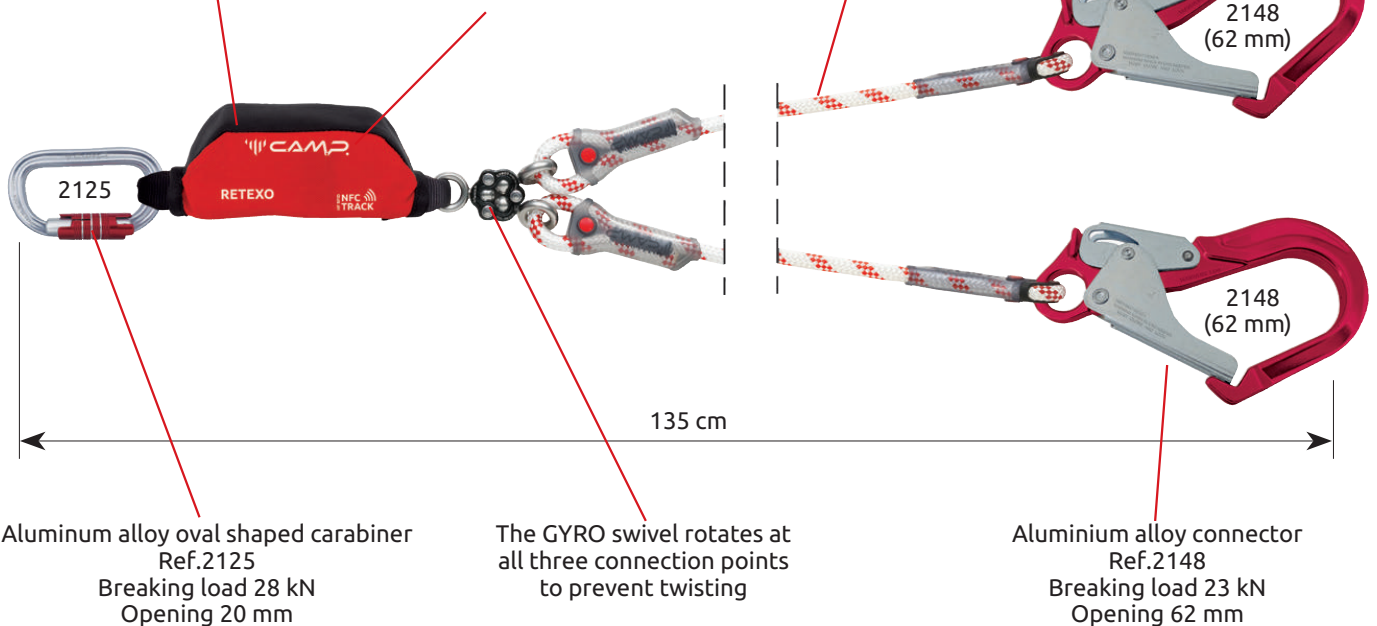

Aluminum alloy oval shaped carabiner  
Ref.2125  
Breaking load 28 kN  
Opening 20 mm

The GYRO swivel rotates at all three connection points to prevent twisting

Aluminium alloy connector  
Ref.2148  
Breaking load 23 kN  
Opening 62 mm

Ref.	Product name	Weight		Strength	Working load Max	CE	 PPE-R/11.074
		g	oz	kN	kg		
5250203	RETEXO GYRO ROPE + 2125 + 2x2148 135 cm	1950	68.8	15	130	•	•



The GYRO swivel rotates at all three connection points to prevent twisting

Loops and stitches are covered by a robust and compact protective system that is easy to inspect



Stitches are covered by a transparent layer for easy inspection. Loops are protected by a plastic system to avoid the wear and tear on the rope.


Robusta custodia protettiva dotata di zip per una facile ispezione dell'indicatore di caduta e dell'etichetta identificativa.

Rimovibile e lavabile.

Equipaggiato con chip NFC TRACK per l'identificazione digitale.



## ETICHETTA CE

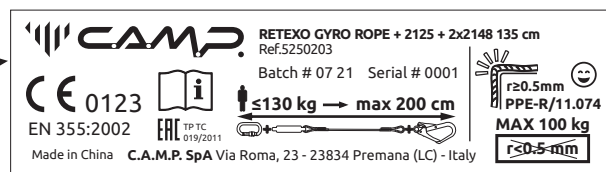

Una singola etichetta con tutti i dati.

## INDICATORE DI CADUTA



Prodotto da mettere fuori servizio se questa etichetta è rotta.

**A**

**Ha**  
Clearance distance below the anchor point (m)

		Standard Users ≤ 100 kg						Heavy Users ≤ 130 kg					
		Fall factor						Fall factor					
Ha	A	0	1	2	0	1	2	0	1	2	0	1	2
A	1,20	1,20	3,70	4,10	4,50	1,20	3,70	4,25	4,80	1,40	3,90	4,50	5,20
	1,40	1,40	3,90	4,35	4,80	1,40	3,90	4,50	5,20	1,50	4,00	4,65	5,40
	1,50	1,50	4,00	4,50	5,00	1,50	4,00	4,65	5,40	1,60	4,10	4,80	5,60
	1,60	1,60	4,10	4,65	5,20	1,60	4,10	4,80	5,60	1,80	4,30	5,10	5,90
	1,80	1,80	4,30	4,90	5,45	1,80	4,30	5,10	5,90	2,00	4,50	5,40	6,20
	2,00	2,00	4,50	5,15	5,70	2,00	4,50	5,40	6,20				

**B**

**HF**  
Clearance distance below the user's feet (m)

		Standard Users ≤ 100 kg				Heavy Users ≤ 130 kg			
		Fall factor				Fall factor			
HF	A	0	2	0	2	0	2	0	2
A	Total length of the lanyard (m)	2,00	6,20	2,00	6,70				

**C**

**B**  
Extension of the energy absorber (m)

		Standard Users ≤ 100 kg						Heavy Users ≤ 130 kg					
		Fall factor						Fall factor					
B	A	0	1	2	0	1	2	0	1	2	0	1	2
A	1,20	0	0,40	0,80	0	0,55	1,10	1,20	0	0,55	1,10	1,40	1,30
	1,40	0	0,45	0,90	0	0,60	1,30	1,40	0	0,60	1,30	1,60	1,60
	1,50	0	0,50	1,00	0	0,65	1,40	1,50	0	0,65	1,40	1,80	1,80
	1,60	0	0,55	1,10	0	0,70	1,50	1,60	0	0,70	1,50	2,00	2,00
	1,80	0	0,60	1,15	0	0,80	1,60	1,80	0	0,80	1,60	2,20	2,20
	2,00	0	0,65	1,20	0	0,90	1,70	2,00	0	0,90	1,70	2,40	2,40

C.A.M.P. presents in this catalog a **complete solution for the digital management of PPE**, both for allocation to users and for periodic inspections: the **NFC TRACK hardware tags on the products** work seamlessly with the **G.T.S. - Gear Tracking System software** to make the system very intuitive and easy to use.

**NFC TRACK chips are installed on many C.A.M.P. products** (harnesses, helmets, Retexo lanyards). They **can also be attached directly on any PPE** by the user, so that the user can assign the PPE data to the chip by means of the C.A.M.P. G.T.S.

**NFC (Near Field Communication) technology** is now present on most smartphones and used every day for smart payments. Today, it also represents the future for the individual identification of products.

The **HF RFID** (High Frequency Radio Frequency Identification) communication system on which NFC is based allows the C.A.M.P. NFC TRACK to be easily read using any latest generation smartphone or for professionals using a PC reader.



**NFC TRACK chip installed!**



## - G.T.S. - GEAR TRACKING SYSTEM

G.T.S. allows professionals to easily manage PPE both via the smartphone app (available on Play Store and Apple Store) and from a PC via the web app.

Two different packages allow for carrying out periodic inspections and also for managing the company allocation of PPE to its employees.

The database of **G.T.S.** includes the **technical information of all C.A.M.P. products** for work at height and a **large number of other products** posted by other users of the community with publicly available information.

