

## Window safety railing **FSG** EN


The width of the telescopic FSG window safety railing from INNOTECH is very easy to adjust, and the system can therefore be used universally.

People who have to carry out maintenance and cleaning work at open windows are therefore protected in the best possible way.

After use, the FSG is quick and easy to remove again, and is stored in a minimum of space.

- universally usable safety railing
- optimum for cleaning tasks
- no guide bush required for attachment – ideal for listed buildings
- simple to store and work with, because of telescopic units
- only one track required for the cleaning personnel
- collective side protection: no safety harness required
- to the latest state of the art certification:

EN 13374:2013

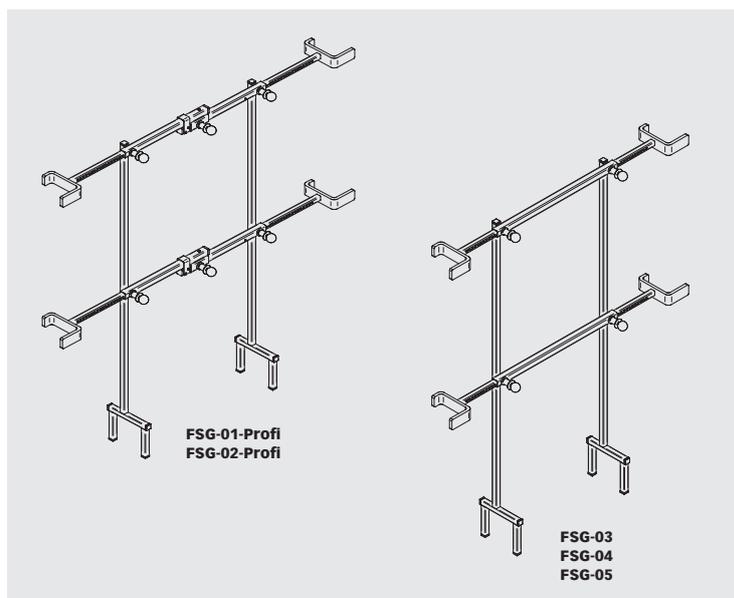

### FSG telescopic window safety railing

- FSG-01-Profi:** 400 – 910 mm (5 kg)
- FSG-02-Profi:** 770 – 1720 mm (7 kg)
- FSG-03:** 490 – 730 mm (4.6 kg)
- FSG-04:** 700 – 1160 mm (5 kg)
- FSG-05:** 1100 – 1570 mm (5.9 kg)