




## Wall sleeves WH, WH50 and WH80

Component of the attachment devices typ AASS 1 - 4 and ASS 1 - 4  
according to EN 795:2012 Typ A und CEN/TS 16415:2017

WH, WH50 und WH80:

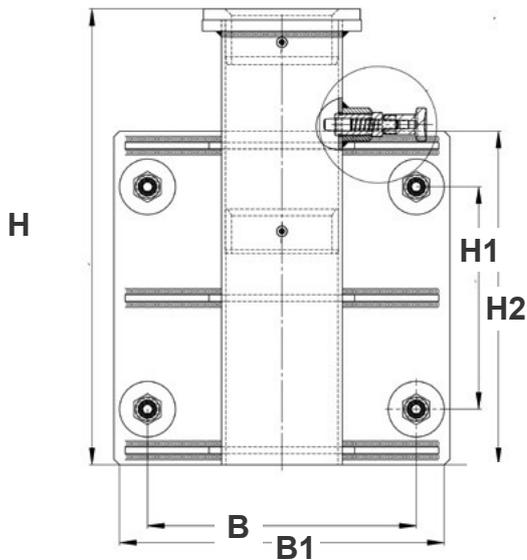

Drawings not true to scale  
Dimensions in mm

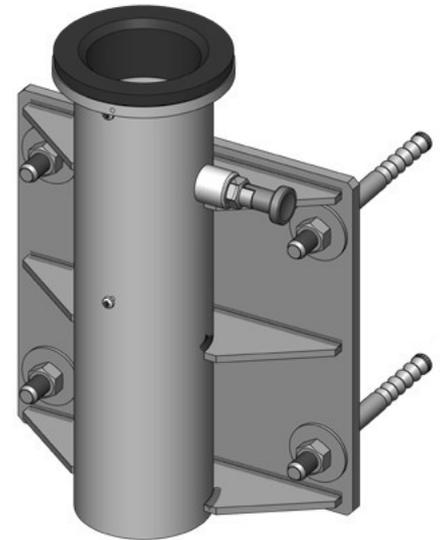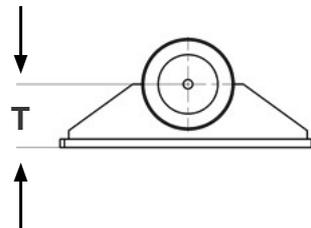

T (Depth):  
WH = 75 mm  
WH50 = 125 mm  
WH80 = 155 mm

Order No:	Height (H)	Height (H1)	Height (H2)	Width (B)	Width (B1)	Depth (T)	Weight
41-57/2V4	410 mm	200 mm	300 mm	240 mm	290 mm	75 mm	15,0 kg
41-57/2-50V4	410 mm	200 mm	300 mm	240 mm	290 mm	125 mm	17,0 kg
41-57/2-80V4	410 mm	200 mm	300 mm	240 mm	290 mm	155 mm	18,2 kg
41-57/7	94 mm			Ø 140 mm			0,5 kg

### Features:

- Stainless steel 1.4571 (V4A).
- Rotary bearing made of resistant PA (polyamide).
- Locking pin (V4A) for fixing the cantilever arm position.
- Can be installed on existing concrete components using a recommended injection anchoring system typ MKT VMZ-AA4 145 M16-30/200 (Order.-No.: 41-57/9a) or steel constructions with M 16 screw connections of quality class 8.8.
- The existing component must withstand the forces occurring in the event of a fall. This test is to be carried out by an architect or statics specialist.
- **optional:** Tight, dust- and splash-proof protective cover (Order.-No.: 41-57/7) made of PA (Polyamid) can be operated with a special key and with IKAR floor and wall sleeves for cantilever arms type AASS 1 - 4 and ASS 1 - 4 compatible.

The assembly instructions for the ground sleeve must be observed.