


SAND-10/-11/-12/-13

SAND

System posts

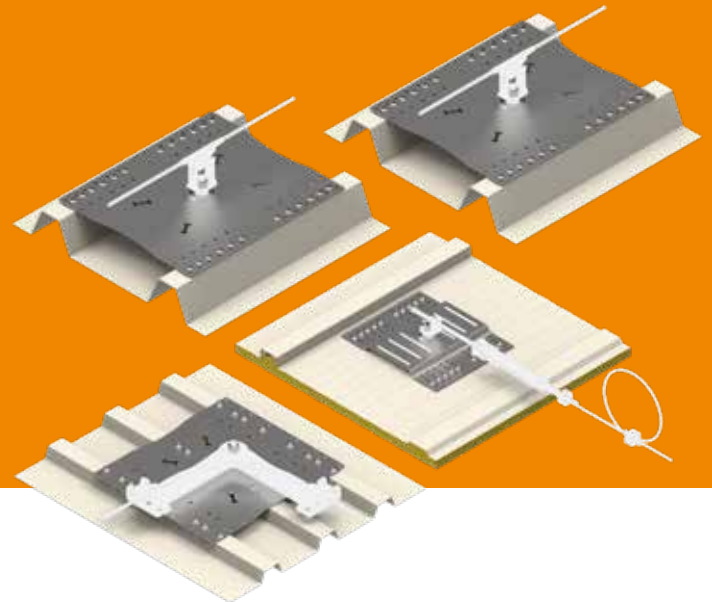

The SAND product family from INNOTECH® has a low system height, and can therefore be installed easily which makes it architecturally inconspicuous. The various SAND solutions make it possible to cover very varying roof deck widths, as well as trapezoidal sheet materials for many system roofs available on the market. This provides the user with maximum flexibility. In addition, the anchorage device

- EAP-SAND: Single anchor point for 3 people, with rotating anchorage eye
- AIO-SAND: Anchorage point for INNOTECH cable system
- For trapezoidal sheet roofs from different manufacturers
- Fastening spacings up to 7.5 m for SAND-10/11/12
- Fastening spacings up to 12 m for SAND-13
- Simple and fast installation

in the cable system can be used as an end, corner, and intermediate bracket. The perfectly matched fasteners save additional time during installation.

The anchorage point has been tested for lateral loads, and secures three people against a fall from the roof.

- Resistant to weathering: Base plate and fastenings are made from corrosion-resistant stainless steel
- Simple to retrofit at any time
- Certification to the latest state of the art:

EN 795:2012 TYPES A and C
 CEN/TS 16415:2013


System posts

EAP | SAND-10/11/12/13

EAP-SAND-10-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 A)


Substructure: trapezoidal sheet
Material: steel
Material thickness: min. 0.6 mm
Width of profile: 250 to 333.3 mm
Base plate dimensions: 360.5 x 415 x 2 mm
Material: stainless steel (AISI 304)



EAP-SAND-11-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 A)


Substructure: trapezoidal sheet
Material: steel
Material thickness: min. 0.6 mm
Width of profile: 277.5 to 414 mm
Base plate dimensions: 389 x 430 x 2 mm
Material: stainless steel (AISI 304)



EAP-SAND-12-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 A)


Substructure: trapezoidal sheet
Material: aluminium
Material thickness: min. 0.7 mm
Width of profile: 250 to 333.3 mm
Base plate dimensions: 360.5 x 415 x 2 mm
Material: stainless steel (AISI 304)



EAP-SAND-13-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 A)

Substructure: trapezoidal sheet
Material: steel
Material thickness: min. 0.6 mm
Width of profile: 210 to 330 mm
Base plate dimensions: 300 x 365 x 2 mm
Material: stainless steel (AISI 304)




AIO | SAND-10/11/12/13

AIO-SAND-10-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 C)


Substructure: trapezoidal sheet
Material: steel
Material thickness: min. 0.6 mm
Width of profile: 250 to 333.3 mm
Base plate dimensions: 360.5 x 415 x 2 mm
Material: stainless steel (AISI 304)



AIO-SAND-11-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 C)


Substructure: trapezoidal sheet
Material: steel
Material thickness: min. 0.6 mm
Width of profile: 277.5 to 414 mm
Base plate dimensions: 389 x 430 x 2 mm
Material: stainless steel (AISI 304)

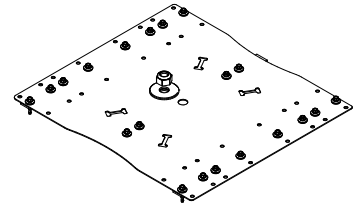

AIO-SAND-12-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 C)

Substructure: trapezoidal sheet
Material: aluminium
Material thickness: min. 0.7 mm
Width of profile: 250 to 333.3 mm
Base plate dimensions: 360.5 x 415 x 2 mm
Material: stainless steel (AISI 304)

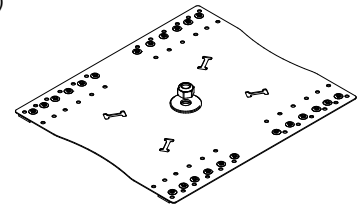

AIO-SAND-13-A2

SINGLE ANCHOR POINT WITH ROTATING ANCHORAGE EYE FOR TRAPEZOIDAL SHEET (EN 795 C)

Substructure: trapezoidal sheet
Material: steel
Material thickness: min. 0.6 mm
Width of profile: 210 to 330 mm
Base plate dimensions: 300 x 365 x 2 mm
Material: stainless steel (AISI 304)

