

Ref.2097 DRUID LANYARD

Work positioning lanyard that allows for precise and quick adjustment even while under tension.
 Constructed from robust 11 mm static rope with an innovative mechanical adjuster derived from the Druid Pro descender. The locking cam uses a patented design for smooth action on the rope which prevents rapid wear-and-tear and absorbs energy from small shocks with a slight amount of rope slippage.
 Adjustment is simple and intuitive. To reduce length, simply pull the rope through the device. To increase length, use the trigger for limited tension situations or the lever when the lanyard is completely loaded.
 Due to the strength of the adjuster, it can be also be used to create adjustable temporary anchor points around a structure. The body and lever are made of robust hot-forged aluminum alloy. Mechanical parts are made of precision-cast stainless steel.
 The rope is removable and replaceable.
 Available in several lengths and versions.

TOWERS/INDUSTRY ROPE ACCESS CONSTRUCTION TEAM RESCUE

NO CONNECTORS


- 209702 5 m
- 209703 10 m
- 209704 20 m



ROOFS TREE CLIMBING TOWERS/INDUSTRY


ALU CONNECTORS

- 209701 2 m + 2125 + 0995

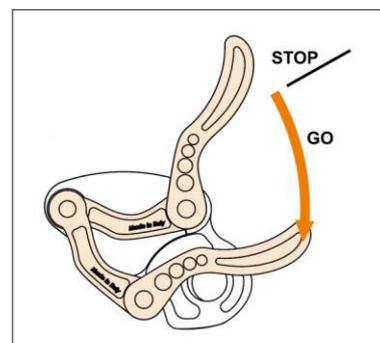

Ref.	Product name Nombre del producto	Weight Peso		CE	
		g	oz	EN 358	EN 795/B
209701	DRUID LANYARD 0.5-2 m + 2125 + 0995	700	24.7	•	•
209702	DRUID LANYARD 0.5-5 m	740	26.1	•	•
209703	DRUID LANYARD 0.5-10 m	1140	40.2	•	•
209704	DRUID LANYARD 0.5-20 m	1940	68.5	•	•

Ref.2097 DRUID LANYARD

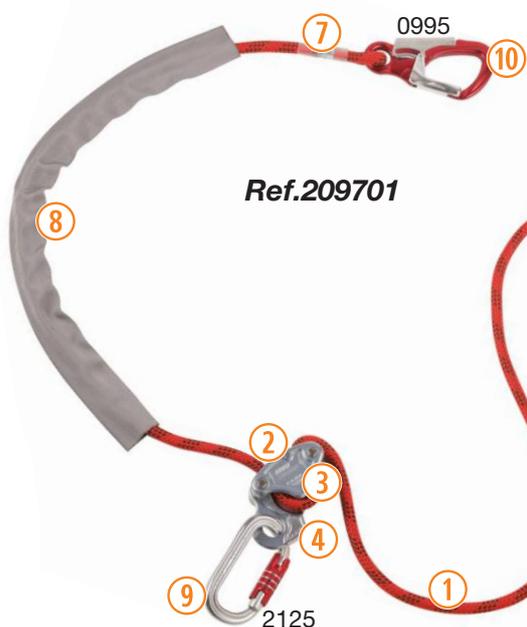

Ref.209701

1. Robust 11 mm static rope. Removable and replaceable.
2. Innovative mechanical adjuster; the locking cam uses a patented design for smooth action on the rope which prevents rapid wear-and-tear and absorbs energy from small shocks with a slight amount of rope slippage.
3. The body and lever are made of robust hot-forged aluminum alloy. Mechanical parts are made of precision-cast stainless steel.
4. Adjustment is simple and intuitive. To reduce length, simply pull the rope through the device. To increase length, use the trigger for limited tension situations or the lever when the lanyard is completely loaded.
5. CE label protected by plastic sheat. Batch number and serial number included.
6. Stitched end with protection layer.
7. High strength polyamide stitching. Breaking load 22 kN.
8. Protection webbing 40 mm wide.

Ref.209701 only:

9. OVAL XL 3LOCK Ref.2125 - Oval connector made of aluminium alloy. Breaking load 28 kN. Opening 20 mm.
10. HERCULES Ref.0995 - Aluminium alloy terminal connector. Breaking load 30 kN. Opening 23 mm.



**Ref.209702
Ref.209703
Ref.209704**


DRUID LANYARD SPARE ROPE

Replacement ropes for the Druid Lanyard.

Ref.20970101
2 m + 0995



Ref.20970201 5 m
Ref.20970301 10 m
Ref.20970401 20 m

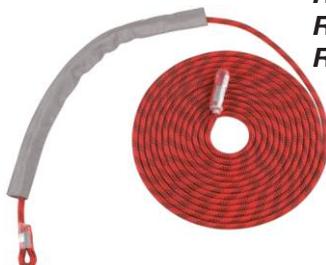

Ref.	Weight Peso	
	g	oz
20970101 - 2 m + 0995	350	12.4
20970201 - 5 m	460	16.2
20970301 - 10 m	860	30.4
20970401 - 20 m	1660	58.6