

Ref.209705 DRUID LANYARD

Work positioning lanyard that allows for precise and quick adjustment even while under tension.
Constructed from robust 11 mm static rope with an innovative mechanical adjuster derived from the Druid Pro descender. The locking cam uses a patented design for smooth action on the rope which prevents rapid wear-and-tear and absorbs energy from small shocks with a slight amount of rope slippage.

Adjustment is simple and intuitive. To reduce length, simply pull the rope through the device. To increase length, use the trigger for limited tension situations or the lever when the lanyard is completely loaded.


Due to the strength of the adjuster, it can be also be used to create adjustable temporary anchor points around a structure. The body and lever are made of robust hot-forged aluminum alloy. Mechanical parts are made of precision-cast stainless steel.

Ref.209705 _ 1.5 m + 2125 + 2148



Ref.	Product name Nombre del producto	Weight Peso		CE	
		g	oz	EN 358	EN 795/B
209705	DRUID LANYARD 0.5-1.5 m + 2125 + 2148	700	24.7	•	•

Ref.209705 **DRUID LANYARD**

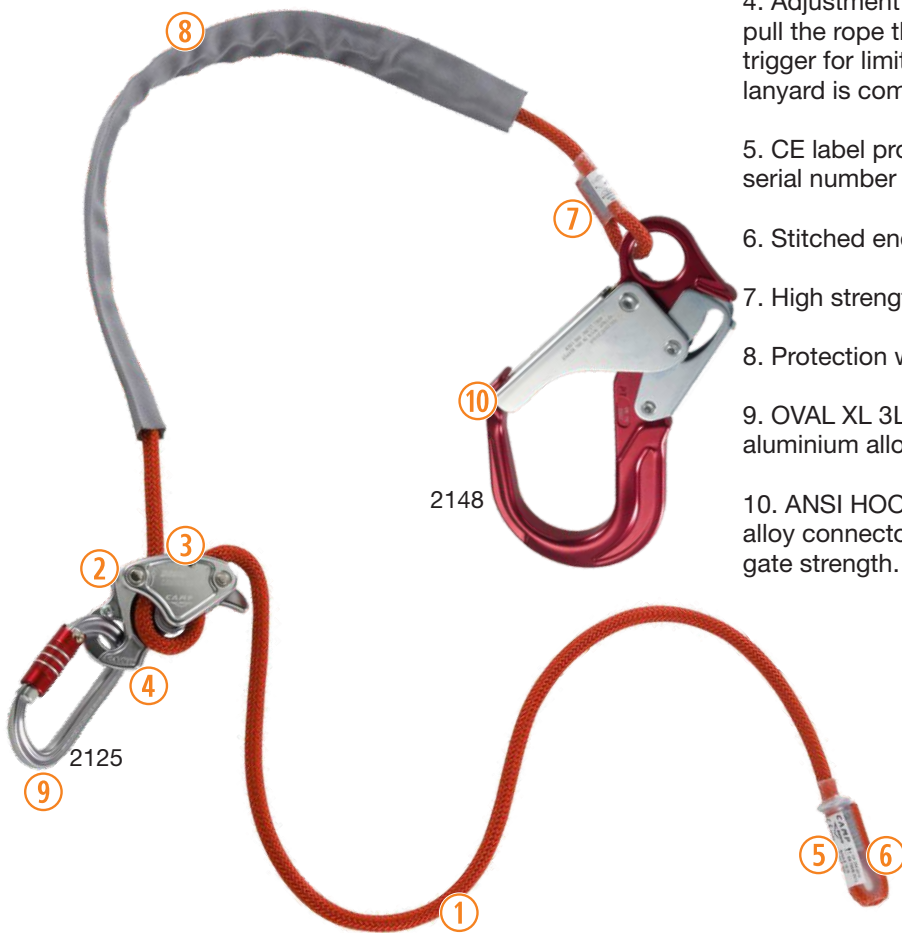

1. Robust 11 mm static rope.

2. Innovative mechanical adjuster; the locking cam uses a patented design for smooth action on the rope which prevents rapid wear-and-tear and absorbs energy from small shocks with a slight amount of rope slippage.

3. The body and lever are made of robust hot-forged aluminum alloy. Mechanical parts are made of precision-cast stainless steel.

4. Adjustment is simple and intuitive. To reduce length, simply pull the rope through the device. To increase length, use the trigger for limited tension situations or the lever when the lanyard is completely loaded.

5. CE label protected by plastic sheath. Batch number and serial number included.

6. Stitched end with protection layer.

7. High strength polyamide stitching. Breaking load 22 kN.

8. Protection webbing 40 mm wide.

9. OVAL XL 3LOCK Ref.2125 - Oval connector made of aluminium alloy. Breaking load 28 kN. Opening 20 mm.

10. ANSI HOOK 62 mm Ref.2148 - High strength aluminium alloy connector. ANSI and CSA certified with 16 kN / 3600 lbs gate strength. Breaking load 23 kN. Opening 62 mm.