


Ref.2810A IRIDIUM 10.5 mm with loops


Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends.
2021 UPDATE: new protective system for rope loops and stitching is incredibly compact and robust; includes anti-rotation rubber for the carabiner.

CONFINED
TOWERS/INDUSTRY
ROOFS
SELF RESCUE

- 2810A005C 5 m
- 2810A010C 10 m
- 2810A015C 15 m
- 2810A020C 20 m
- 2810A030C 30 m
- 2810A040C 40 m
- 2810A050C 50 m
- 2810A060C 60 m

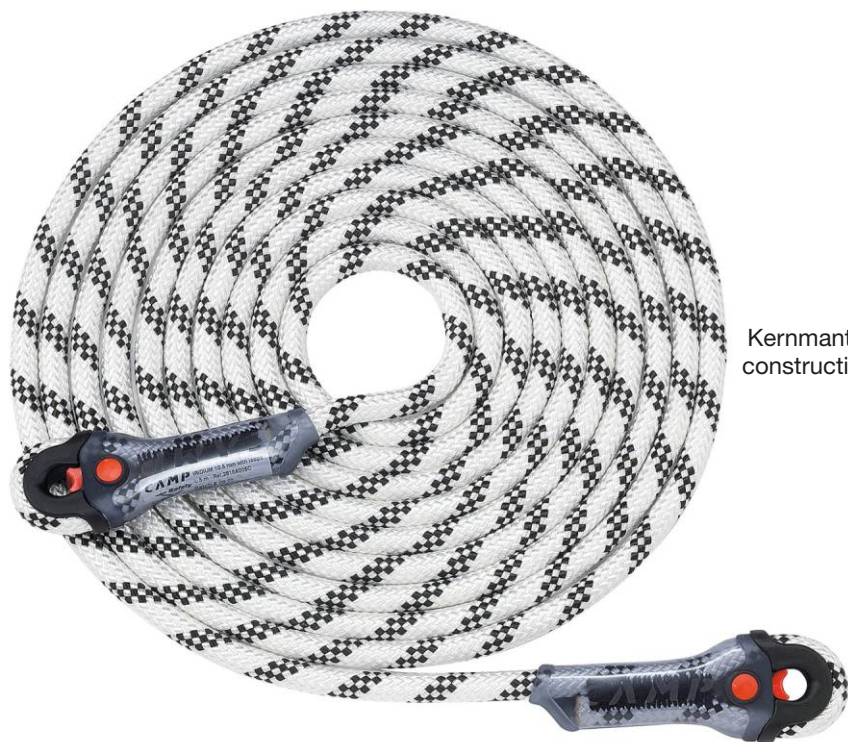

Kernmantel construction

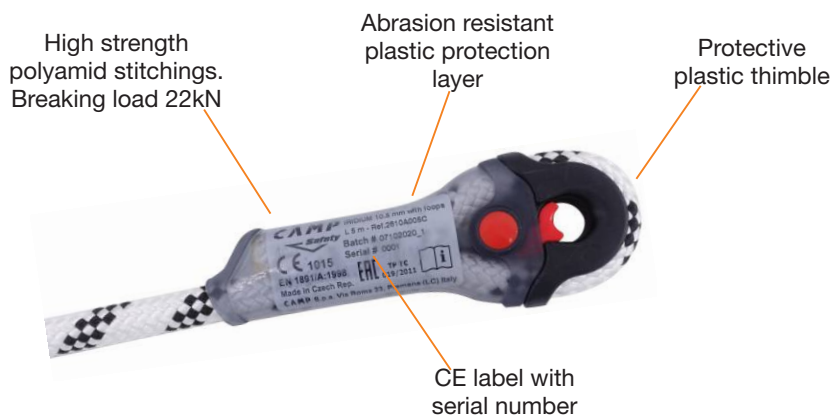

High strength polyamid stitchings. Breaking load 22kN

Abrasion resistant plastic protection layer

Protective plastic thimble

CE label with serial number

Ref.	Product name Nombre del producto	Length Longitudes	Weight Peso		Static strength Resistencia estática	Material	CE EN 1891	ERC
			g	oz				
2810A005C	IRIDIUM 10.5 mm 5 m WITH LOOPS	5 m	460	16.2	22	Polyamide 6 Poliamida 6	A	•
2810A010C	IRIDIUM 10.5 mm 10 m WITH LOOPS	10 m	820	28.9				•
2810A015C	IRIDIUM 10.5 mm 15 m WITH LOOPS	15 m	1160	40.9				•
2810A020C	IRIDIUM 10.5 mm 20 m WITH LOOPS	20 m	1520	53.6				•
2810A030C	IRIDIUM 10.5 mm 30 m WITH LOOPS	30 m	2210	77.9				•
2810A040C	IRIDIUM 10.5 mm 40 m WITH LOOPS	40 m	2900	102.3				•
2810A050C	IRIDIUM 10.5 mm 50 m WITH LOOPS	50 m	3600	127				•
2810A060C	IRIDIUM 10.5 mm 60 m WITH LOOPS	60 m	4280	151				•