


EAP/AIO

VARIO

Self supporting lifeline system

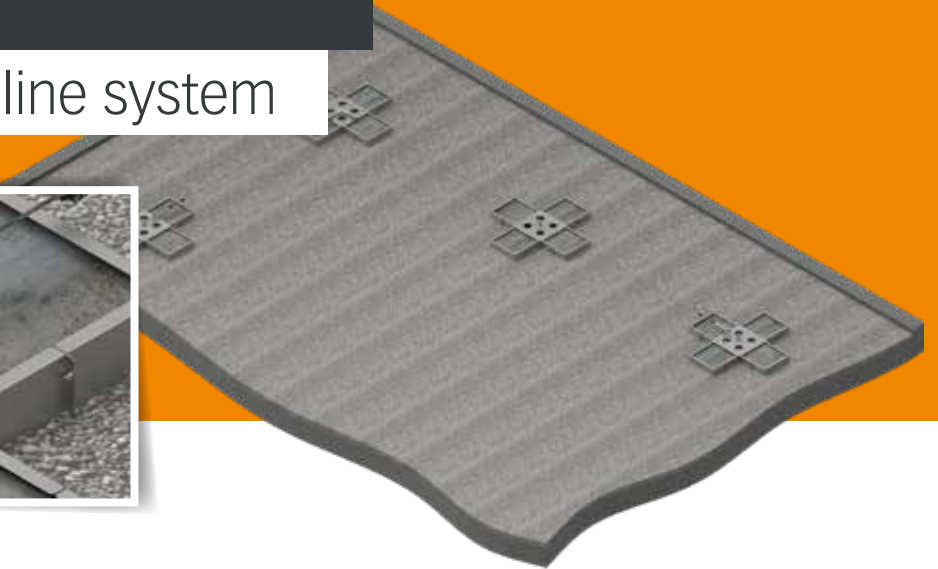

The VARIO lifeline system from INNOTECH, held by superimposed load, is a winner, especially because of its economy in two respects: The need for only a small number of screwed connections ensures rapid and simple installation.

- Single anchor point or end, corner, and intermediate post in the INNOTECH lifeline and rail system
- For flat roofs up to a pitch of 5°
- Held by superimposed load; can be filled with concrete slabs
- Quick and simple installation
- Perforation-free installation (no cold bridges); no flame or adhesive tasks are required

In addition, four viewing openings allow rapid annual inspection of the screwed connections.

- Fastening spacings up to 10 m are possible in the lifeline system
- Compact packed size
- Simple to retrofit at any time, without roof penetration
- Certification to the latest state of the art:

EN 795:2012 TYPES C and E
CEN/TS 16415:2013

Lifeline system held by superimposed load


EAP | SINGLE ANCHOR POINT VARIANTS

EAP-VARIO-15

SINGLE ANCHOR POINT - HELD BY SUPERIMPOSED LOAD, WITH ROTATING ANCHORAGE EYE (EN 795 E)

Substructure: Flat roofs up to 5° inclination, with parapet
 Dimensions: 1536 x 1536 mm
 Net weight: approx. 21 kg (excluding underlay mat)
 Final weight: approx. 384 - 499 kg
 Filling material: Concrete or 12/15x concrete slabs (50x50x5 cm, 49x49x5 cm) or 16/20x concrete slabs (50x50x4 cm)
 Material: stainless steel (AISI 304)

Without roof perforation

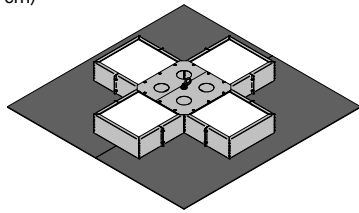


AIO | LIFELINE SYSTEM VARIANTS

AIO-VARIO-45



END, CORNER, AND INTERMEDIATE POST IN THE AIO LIFELINE SYSTEM, HELD BY SUPERIMPOSED LOAD (EN 795 C-E)

Substructure: Flat roofs up to 5° inclination, with parapet
 Dimensions: 1536 x 1536 mm
 Net weight: approx. 21 kg (excluding underlay mat)
 Final weight: approx. 384 - 499 kg
 Filling material: Concrete or 12/15x concrete slabs (50x50x5 cm, 49x49x5 cm) or 16/20x concrete slabs (50x50x4 cm)
 Material: stainless steel (AISI 304)



Without roof perforation

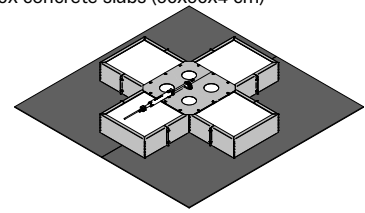



EAP | VARIO-15 (EXCLUDING GRAVEL)

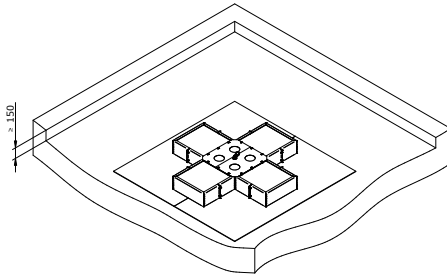

AIO | VARIO-45 (EXCLUDING GRAVEL)

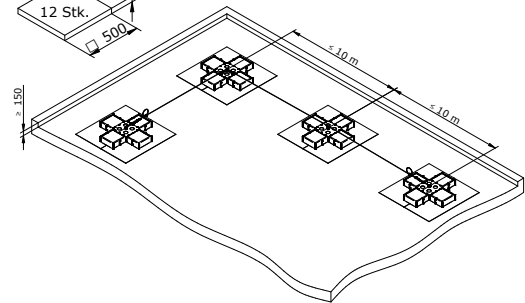

EAP | VARIO-15 (SECURED WITH GRAVEL)

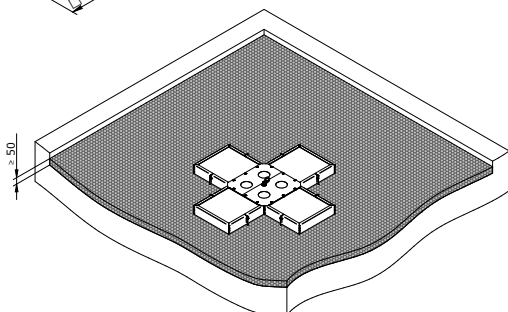

AIO | VARIO-45 (SECURED WITH GRAVEL)

