

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B143/15**

(3) Product: **Anchor device type A**
Type: **FALZ-15**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, A-4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 15-206.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2013

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2021-04-11.

DEKRA EXAM GmbH
Bochum, 2016-04-12

signed: Wiegand
Certification body

signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Certification body


Special services unit

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B143/15
- (13) 13.1 Subject and Type
Anchor device type A
Type: FALZ-15

13.2 Description

The anchor device type: FALZ-15 (fig. 1) is used to protect a maximum number of three persons against falls from a height and is intended for assembly on standing seam roofs with a thickness of 0.6 mm made of aluminium, titanium zinc, copper or galvanised and corrosion-resistant steel.

The anchor device is clamped to the standing seam of the roof profile by means of four edged sheet steel profiles made of corrosion-resistant steel. These profiles are fitted to the outlines of the standing seam of the roof. The profile halves of the clamps are screwed to each other by means of two screws with self-locking nuts after they have been put on the standing seam of the roof. The entire construction of the standing seam anchor is H-shaped.

The clamps and the connecting profile are connected to each other by each one round-head screw guided in long holes. The long holes can be used to adjust the clamps to the distance of the standing seams. The two connecting profiles are led through the central spar via a recess and are screwed together. At the centre of the central spar there is a hole to take the eyelet on which the user secures himself with his personal protective equipment against falls from a height.

In addition, the anchor device can also be used as an end, corner or structural intermediate anchor in an INNOTECH horizontal wire rope system of type ALL in ONE according to DIN EN 795:2012 Type C.

Note:

Subject of examination is to verify the load capacity of the anchor device based on selected standards. The attachment to the structure and the behavior of the structure is not included in the examination. The installation of the anchor device was carried out in accordance with the instructions of the client.

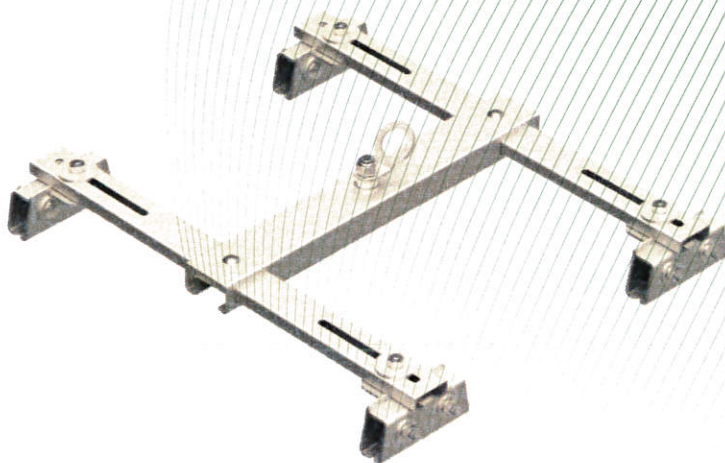


Fig. 1: Anchor device type A, type: FALZ-15

- (14) Test and Assessment Report
PB 15-206 dd. 2016-04-11