

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B068/16**

(3) Product: **Anchor device type A**
Type: **SPAR-11**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, A-4656 KIRCHHAM, ÖSTERREICH**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 16-034.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2013

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2021-08-23.


DEKRA EXAM GmbH
Bochum, 2016-08-24

signed: Wiegand
Certification body

signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Certification body


Special services unit

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B068/16
- (13) 13.1 Subject and Type
Anchor device type A
Type: SPAR-11

13.2 Description

The anchor device, type: SPAR-11 (fig. 1) is a single anchor point that is used to protect a maximum number of three persons against falls from a height. The anchor device consists of a hexagon bolt M16 (SPAR-11 50 mm) or a threaded bar (SPAR-11 700 mm) made of corrosion-resistant steel. At the top end of the hexagon bolt or the threaded bar an attachment element is bolted by means of two securely screw-fastened hexagon nuts M16. The user can protect himself against falls from a height by connecting his personal protective equipment to the freely rotating anchor point. The height of the anchor device is between 50 mm and 700 mm. The anchor device can be used on a wooden surface ($\geq 100 \text{ mm} \times 140 \text{ mm}$, min. 24 mm timber planking), concrete surface ($t \geq 160 \text{ mm}$) or steel construction ($t \geq 4 \text{ mm}$).

The anchor device can be loaded in all directions parallel to the roof surface.

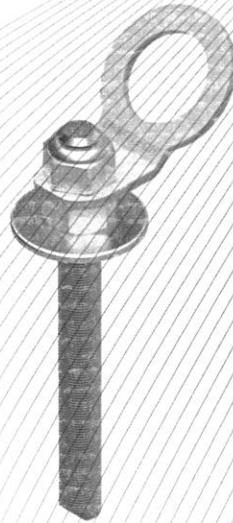


Figure 1: Anchor device type A, type: SPAR-11

- (14) Test and Assessment Report
PB 16-034 dd. 2016-08-23