

HRA 24


according to EN 360:2002, EN 1496:2007, ANSI Z359.14-2014, CSA Z259.2.2-98



IKV 21 (EN 362:2004-T)
with fall indicator



IKV 33 (ANSI Z.359.1-2007;
CSA Z259.12-2011)
with fall indicator

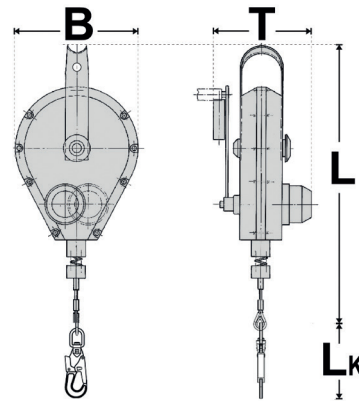

Explanation for the device names:

H = Height Safety Device
R = Rescue hoisting facility
S = Let-down function
P = Plastic housing
Number = Insert length of the device

Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K)	
					IKV 21	IKV 33
41-HRA 24	24 m	Aluminium	16,0 kg	630 x 275 x 220 mm	186 mm	196 mm

Features:

Height safety devices with rescue hoisting facility and internal energy absorbing

- Resistant and low-maintenance height safety device with rescue hoisting facility and handle
- Robust, seawater-resistant aluminium housing with retractable lifeline made of galvanized steel rope Ø 4,8 mm
- Standard connector IKV 21, swiveling
or IKV 33
- Rescue hoisting facility with integrated energy absorbing function according to EN 1496: 2007-B, which is in the case of rescue by a second person
- Completely enclosed unit with parts made of stainless steel, sea water resistant aluminium or impact resistant plastic Crankshaft diameter: Ø = 550 mm
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Life service: approx 10 years

Use only in combination with IKAR brackets!