

## Flexible HWPB 3,5


according EN 360:2002, ANSI Z359.14-2014, CSA Z259.2.2-98



IKV 11 (EN 362:2004-T)



IKV 28 (ANSI Z.359.1-2007;  
CSA Z259.12-2011)

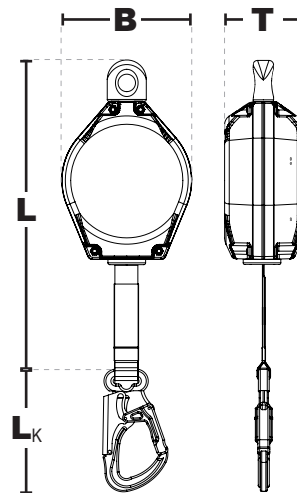

### Explanations of the device names:

- H** = Height Safety Device
- W** = Swivel attachment point
- S** = Galvanized steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Insert length of the device



IKAR height safety devices have been successfully tested in a simulated fall trial over and edge  
ANSI/ASSE Z 359.14-2012 ( $r \geq 0,13$  mm) and  
CNB/P/11.060 ( $r \geq 0,5$  mm)

## Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L <sub>K</sub> )	
					IKV 11	IKV 28
41-HWPB 3,5	3,5 m	Plastic	1,2 kg	326 x 104 x 78 mm	137 mm	147 mm

## Features:

### Height safety devices with internal energy absorber:

- Resistant and low-maintenance height safety device with swivel eye attachment point
- Robust, plastic housing with a Dyneema® webbing lifeline
- Standard connector IKV 11 (EN 360) IKV 28 (ANSI, CSA)
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Service life: approx 10 years