

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B025/21**

(3) Product: **Anchor device type A**
Type: **QUAD**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 21-036.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2026-02-11.

DEKRA Testing and Certification GmbH
Bochum, 2021-02-12

signed: Killisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B025/21
- (13) 13.1 Subject and Type
Anchor device type A
Type: QUAD

13.2 Description

The anchor devices of types QUAD-11, QUAD-13 and QUAD-13-END (Fig. 1-3) are used to simultaneously protect a maximum of three people against falls from a height.

The anchor devices of types QUAD-11 and QUAD-13 each consist of a base plate and a rod (\varnothing 16 mm), which is welded to the base plate. The anchor device of type QUAD-13-END consists of a base plate, an additional base disc (\varnothing 150 mm) and a pipe (\varnothing 50 mm). At the upper end of the rod or pipe an anchor eyelet is securely screw-fastened by means of a securely screwed hexagonal nut (M 16). The user can secure himself against falls from a height by connecting his personal protective equipment to this eyelet. Using the respective fastening elements, the anchor devices are fastened directly to the structure to suitable surfaces of sufficient strength.

They are made of corrosion-resistant steel and intended for intended for mounting to roofs, walls and ceilings. Therefore, load to the device can be exerted from all directions.

Moreover, the products labelled as types QUAD-11, QUAD-13 and QUAD-13-END are used as components of the rope system type INNOTECH ALLinONE. Below, the different variants of the anchor devices will be explained.

Explanations on anchor device, type QUAD-11 (Fig. 1)

- Securing up to maximum three people simultaneously
- Rod diameter: \varnothing 16 mm
- Rod length: 200 mm bis 600 mm
- Dimensions of base plate: 235 x 235 x 4 mm

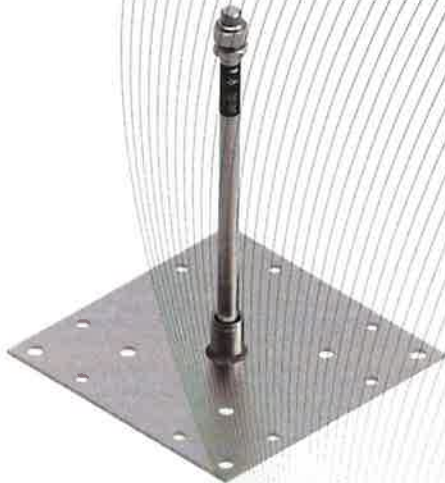


Fig. 1: Anchor device, type QUAD-11

TRANSLATION

Explanations on anchor device, type QUAD-13 (Fig. 2)

- Securing up to maximum three people simultaneously
- Rod diameter: \varnothing 16 mm
- Rod length: 300 mm bis 600 mm
- Dimensions of base plate: 212 x 212 x 5 mm



Fig. 2: Anchor device, type QUAD-13

Explanations on anchor device, type QUAD-13-END (Fig. 3)

- Securing up to maximum three people simultaneously
- Pipe diameter: \varnothing 50 mm
- Pipe length: 400 mm bis 600 mm
- Dimensions of base plate: 212 x 212 x 5 mm



Fig. 3: Anchor device, type QUAD-13-END

(14) Report

PB 21-036, 2021-02-12